



# Installation Guide

Changepoint 2017 SP2

Copyright © 2019 Changepoint Canada ULC. All rights reserved.

U.S. GOVERNMENT RIGHTS-Use, duplication, or disclosure by the U.S. Government is subject to restrictions as set forth in Changepoint Canada ULC license agreement and as provided in DFARS 227.7202-1(a) and 227.7202-3(a) (1995), DFARS 252.227-7013(c)(1)(ii) (OCT 1988), FAR 12.212(a) (1995), FAR 52.227-19, or FAR 52.227-14 (ALT III), as applicable.

This product contains confidential information and trade secrets of Changepoint Canada ULC. Disclosure is prohibited without the prior express written permission of Changepoint Canada ULC. Use of this product is subject to the terms and conditions of the user's License Agreement with Changepoint Canada ULC.

Documentation may only be reproduced by Licensee for internal use. The content of this document may not be altered, modified or changed without the express written consent of Changepoint Canada ULC. Changepoint Canada ULC may change the content specified herein at any time, with or without notice.

# Contents

<b>1. Installation Requirements and Preparation</b>	<b>13</b>
Introduction	13
Hardware and software requirements	14
Required skills	15
Latest patches and service packs	15
Required accounts and permissions	15
Installation considerations	16
Installation parameters	18
<b>2. Installing Required Changepoint Components</b>	<b>23</b>
Installing Changepoint using the installer	23
Installing multiple Changepoint instances	24
Modifying a Changepoint instance	25
Uninstalling a Changepoint instance	26
Installing the Changepoint database manually	27
Installing the Infiniti database manually	29
<b>3. Installing and Configuring Redis</b>	<b>31</b>
About Redis	31
About installing the Redis server	31
Common Redis commands	32
Single web server deployment	33
Multiple web server deployment, without high availability	35
Multiple web server deployment with high availability	37
Configure a multiple server deployment	38
Installing Redis Sentinel	38
Starting Redis Sentinel (Console mode)	40
Installing Redis Sentinel Service	41
Uninstalling Redis Sentinel Service	42
Starting the Redis Sentinel Service	42
Stopping the Redis Sentinel Service	42
Common Redis Sentinel commands	42
Common Redis Sentinel scenarios	45
<b>4. Configuring Changepoint</b>	<b>47</b>
Overview of configuration	47
Setting permissions on the Changepoint folders	48

---

About setting up Changepoint websites for SSL .....	48
Enabling HTTP Compression .....	49
Setting Global IIS Parameters .....	49
Configuring IIS to allow plug-in and expense template downloads .....	50
Importing licences for a new installation .....	50
<b>5. Installing Changepoint Windows Services .....</b>	<b>51</b>
Installing a Changepoint Windows service .....	51
Changepoint Email Notification service .....	51
Changepoint Exchange Synchronization Service .....	52
Create a domain user account for Exchange .....	53
Create a user account for the Changepoint Exchange Synchronization Service .....	54
Changepoint Mail Service .....	57
Changepoint Report Prerender Service .....	59
Changepoint Report Scheduler Service .....	61
Using the Report Scheduler Service Controller .....	62
Managing Changepoint Windows Services .....	63
<b>6. Configuring Database Connection Settings .....</b>	<b>65</b>
About configuring database connection settings .....	65
Configuring database connection settings .....	65
Database connection settings for Batch Print .....	66
Database connection settings for Changepoint .....	66
Database connection settings for Changepoint Email Notification Service .....	68
Database connection settings for Changepoint Exchange Synchronization Service .....	69
Database connection settings for Changepoint Export Publishing Service .....	69
Database connection settings for Changepoint Mail Windows Service .....	70
Database connection settings for Changepoint Report Prerender Service .....	70
Database connection settings for Changepoint Report Scheduler Service .....	71
Database connection settings for Changepoint Report Server .....	73
Database connection settings for Cognos Client Tools .....	73
Database connection settings for Data Archiving Source SQL server .....	74
Database connection settings for Data Archiving Target SQL server .....	74
Database connection settings for Infiniti Launch .....	75
Database connection settings for Infiniti Scheduler .....	76
Database connection settings for Intelligent Forms .....	76
Database connection settings for Intelligent Forms (Changepoint Data Services, Manage, and Produce) .....	77
Database connection settings for Report Designer .....	78
Database connection settings for RESTful API .....	79

---

---

Database connection settings for CPEffectiveDates scheduled job .....	80
Database connection settings for Release Guest Licenses scheduled job .....	80
Database connection settings for Transport Tool .....	81
Database connection settings for Web Services API .....	82
Database connection settings for Web Sockets .....	82
<b>7. Configuring Changepoint Scheduled Jobs .....</b>	<b>83</b>
About Changepoint scheduled jobs .....	83
Scheduled Jobs reference list .....	85
Adjust Daylight Saving scheduled job .....	85
Archive Aged Entities scheduled job .....	85
Archive Validation scheduled job .....	86
Auto Dispatch Request to Queues scheduled job .....	86
Auto Escalate Requests scheduled job .....	86
BatchCommitInvoices scheduled job .....	87
BatchInvoicingGetInvoiceDefaultList scheduled job .....	87
Calculate Project Costs scheduled job .....	87
CheckTimeToApprove scheduled job .....	88
CleanResourceAvailability scheduled job .....	88
CPEffectivedates scheduled job .....	89
CPExtended_Compile stats and purge data scheduled job .....	89
CPFullText scheduled job .....	89
CPFullText using background updates scheduled job .....	90
CPTempDB_Clean up idle-orphaned schemas scheduled job .....	90
Financial Analysis Summary scheduled job .....	90
IPM Calculation Engine scheduled job .....	91
Nonworking Days Task Assignments Email scheduled job .....	92
PercentOfContractIncurred scheduled job .....	92
PerformanceCPGrowth scheduled job .....	93
Populate Demand and Capacity scheduled job .....	93
Portfolio Calculate Report Cards .....	93
Portfolio Calculation Engine scheduled job .....	94
Process Expense Approval scheduled job .....	95
Process Time Entries for Approval scheduled job .....	96
Reindex and Update Statistics daily scheduled job .....	96
Reindex and Update Statistics weekly scheduled job .....	96
Release Guest Licenses scheduled job .....	97
Release Held Locks scheduled job .....	97
Resource Demand Calculation scheduled job .....	98
Resource Utilization scheduled job .....	98

---

---

Revenue Recognition Tentative scheduled job .....	99
Session Clean Up scheduled job .....	99
Survey Set Expired Survey scheduled job .....	100
Task Slippage scheduled job .....	100
Time Conformance scheduled job .....	101
Update Time Rate scheduled job .....	101
Validate UDFs scheduled job scheduled job .....	101
Workflow Management scheduled job .....	102
Editing parameters for scheduled jobs .....	102
Monitoring database growth .....	103
Retaining daily demand distributions in past fiscal periods .....	106
<b>8. Installing and Configuring Cognos Analytics .....</b>	<b>107</b>
Overview of Cognos Analytics installation and configuration .....	107
Preparing to install Cognos Analytics .....	108
About roles and feature mapping between Cognos and Changepoint .....	108
Installation parameters for Cognos Analytics .....	109
Stage 1. Creating the Cognos Content Store database .....	110
Stage 2. Installing the Cognos Application Tier .....	110
Stage 3. Configuring the Cognos Application Tier .....	111
Stage 4. Installing the Cognos web components .....	114
Stage 5. Configuring Changepoint server integration for Cognos Analytics .....	115
Stage 6. Assigning Changepoint security features for access to Cognos functionality .....	116
Stage 7. Importing the Changepoint metadata package .....	116
Stage 8. Setting up the data source for IBM Cognos Analytics .....	117
Stage 9. Setting the security settings in Cognos .....	119
About the Changepoint-Cognos Sync Utility .....	120
About using the Sync Utility with multiple Cognos Analytics instances .....	121
Upgrading the Sync Utility .....	121
Installing the Sync Utility .....	122
Importing the base data model .....	123
Adding customized field labels and configurable fields to the data model .....	123
Reverting to a previous version of the base data model .....	124
<b>9. Installing additional instances of Cognos Application Tier and web components .....</b>	<b>125</b>
About installing additional instances of Cognos Application Tier and web components .....	125
Installation parameters for additional instances of Cognos Application Tier and web components .....	125
Installing an additional Cognos Application Tier instance .....	126
Configuring an additional Cognos Application Tier component .....	127

---

---

Installing additional Cognos web component instances on a single server .....	130
Installing an additional Cognos web component .....	130
Pointing the Cognos web component to a different server .....	131
Configuring the Custom Authentication Provider (CAP) manually .....	132
<b>10. Configuring Intelligent Forms .....</b>	<b>133</b>
About Intelligent Forms .....	133
Standard form templates .....	133
Configuring Intelligent Forms .....	134
Configuring Intelligent Forms on an SSO environment .....	136
Configuring Intelligent Forms in a load-balanced environment .....	136
<b>11. Installing and Configuring Single Sign-on (SSO) .....</b>	<b>139</b>
About Changepoint and SSO .....	139
About application authentication .....	140
Implementing application authentication .....	141
Authentication configuration scenarios .....	142
<b>12. Installing and Configuring Other Optional Applications, Features, and Services .....</b>	<b>145</b>
Installing the Changepoint online help .....	145
Installing Changepoint eLearning .....	146
Setting up the Changepoint Mobile app .....	146
Setting up mobile access to Changepoint .....	147
Setting up a Client Portal website .....	147
Setting up a survey response website .....	148
About Microsoft Exchange/Outlook synchronization .....	149
About Microsoft Project Desktop integration .....	149
Configuring batch printing .....	150
About installing Changepoint APIs .....	151
Installing the connection string decryption utility .....	152
Browser settings for end users .....	152
<b>13. Upgrading to Changepoint 2017 SP2 .....</b>	<b>153</b>
About the upgrade .....	153
Supported upgrade paths .....	153
Upgrade overview .....	153
Preparing for the upgrade .....	153
Assess the impact on customizations and product extensions .....	153
Perform backups .....	154
Upgrade in a test environment first .....	154

---

---

Intelligent Forms installation parameters .....	155
Identifying nonstandard database objects .....	156
Pre-upgrade steps .....	157
Upgrading the Changepoint servers using the installer .....	159
Upgrading the Changepoint database server manually .....	160
Upgrading the Infiniti database manually .....	160
Completing the upgrade .....	160
Completing the upgrade on the database server .....	161
Configuring the CPEffectiveDates scheduled job for access to the Redis cache .....	162
Completing the installation of Intelligent Forms .....	162
Running the script to prevent time entry on summary tasks .....	163
Completing the upgrade on the web servers .....	164
Upgrading Changepoint Windows services .....	166
Upgrading the online help .....	167
Setting up the Changepoint Mobile app .....	167
Upgrading the Changepoint API .....	168
Upgrading the Integration Framework .....	170
Upgrading the toolkits .....	170
Upgrading the Transport Tool .....	170
Upgrading the archive database and websites .....	170
Configuring the archive database .....	171
Verifying component versions .....	171
Upgrading Cognos .....	171
Upgrading to Cognos Analytics .....	171
Manually uninstalling Cognos .....	174
Troubleshooting the upgrade .....	175
Execution timeout error in RSW. ....	175
Changepoint Mail Service error in event log .....	175
Access to the path '...\RP-STC_ADFS\Web.config' is denied" error when signing into Changepoint .....	175
Cognos report in a portal will not load .....	175
HTTP 403 errorProject Planning Worksheet fails to savePreferred resources cannot be edited .....	175
Errors in the Changepoint Installer.log .....	176
Server error in browser .....	176
Project planning worksheet does not loadError when accessing Manage Preferred Resources"Access to registry key 'Global' is denied" in Changepoint event log .....	177
<b>14. Porting the Changepoint database .....</b>	<b>179</b>
Overview .....	179

---



---

Porting the Changepoint database .....	179
After porting the Changepoint database .....	180
Porting an archive database .....	181
<b>15. Optimizing Performance .....</b>	<b>183</b>
Changepoint performance guidelines .....	183
Configuring the antivirus exclusion list .....	183
Exclusion list for the database server .....	183
Exclusion list for the web server .....	183
Performance guidelines for the Changepoint database server .....	184
<b>16. Changepoint Connection String Decryption Utility .....</b>	<b>187</b>
About decrypting connection strings .....	187
Code examples for decrypting connection strings .....	187
Report example for using CP Decrypt Interface .....	188
<b>17. Creating a Test and Training Environment .....</b>	<b>191</b>
Creating a test and training environment on the same server .....	191
Porting the Cognos content store database .....	192
Export the Cognos content store database .....	193
Import the Cognos metadata package .....	193
Set up the Cognos data source for the testing site .....	193
Setting up Client Portal in a training environment .....	193
<b>A. Configuration file settings .....</b>	<b>195</b>
About Changepoint configuration files .....	195
Web.config configuration file settings .....	195
Authentication settings .....	195
Caching settings .....	195
Cognos Analytics settings .....	196
Cookie settings .....	196
Export Publishing settings .....	196
Field settings .....	196
File type filter settings .....	197
HTTP runtime settings .....	197
Logging settings .....	198
Mobile access settings .....	198
Page Content IDs (PCIDs) .....	199
Page Size .....	199
Projects tree view settings – Web.config .....	199

---

---

Scenario comparisons worksheet (SCW) settings .....	200
Resource management worksheet (RMW) settings .....	201
Time-out settings .....	201
Terminology mode settings .....	201
Tree view settings .....	201
Workflow settings .....	202
Global.asa configuration file settings .....	202
Caching settings .....	202
Cookie settings .....	202
Page Content ID (PCID) settings .....	203
Page size .....	203
Projects tree view settings – Global.asa .....	203
Reporting .....	204
Terminology mode .....	204
Time-out (ADO Commands) .....	204
<b>B. Troubleshooting .....</b>	<b>207</b>
Changepoint installer issues .....	207
Changepoint troubleshooting issues .....	208
SSO ADFS issues .....	211
Changepoint Web Services API Issues .....	212
Changepoint Windows Services Issues .....	212
Exchange Server troubleshooting .....	213
SQL Server troubleshooting .....	215
Changepoint database troubleshooting .....	216
Archive database troubleshooting .....	217
Cognos Analytics installation troubleshooting .....	218
Changepoint-Cognos Sync utility troubleshooting .....	220
Troubleshooting scheduled jobs .....	221
Troubleshooting Intelligent Forms .....	221
<b>C. Financial Analysis Information .....</b>	<b>223</b>
Adding fiscal periods to group financial analysis data .....	223
Enabling financial analysis record types .....	223
<b>D. Administrator Information .....</b>	<b>225</b>
About creating and configuring an archive database .....	225
Configuring the archive database .....	227
Changing the default location of the data archiving folder .....	227
Setting up websites on the archive database .....	228

---

---

Creating a custom form .....	229
Configuring a form project to push and pull Changepoint data .....	229
About creating form projects that create or update entities .....	230
Adding an Intelligent Forms form to the Actions menu .....	230
Adding logos for invoices/cross charges .....	231
Adding a custom invoice/cross charge format .....	231
Adding a custom ASP report .....	232
Changing printers for batch printing .....	232
About switching between PSA and PPM modes .....	232
Switching between PSA mode and PPM mode .....	233
Running both PSA mode and PPM mode on the same database .....	234
ASP-based reports that support DSN .....	234
Setting up access to Changepoint portlets and reports in third-party portals .....	237
Changepoint portlet names and IDs .....	238
<b>Index .....</b>	<b>245</b>



# 1. Installation Requirements and Preparation

---

## Introduction

The document provides instructions for installing and upgrading to the 2017 SP2 release of Changepoint. Upgrade instructions for service packs are in the service pack team folders.

Some of the information in this document is for the ongoing maintenance of a Changepoint installation.

### Changepoint components

A minimal Changepoint installation consists of the following required components:

- database (Changepoint database, CPTempDB, CPExtended, Infiniti)
- website
- scheduled jobs
- Redis (third-party caching component)

Optional applications, features, and services include Changepoint software and third-party software.

### About the secondary databases

CPTempDB and CPExtended are secondary databases that are on the same server as the main Changepoint database, and are installed automatically when you install the Changepoint database using the installer.

CPTempDB provides dedicated temporary storage and processes transient, session-based data and code. By design, the CPTempDB database is created using Simple Recovery Mode to minimize log space requirements. The session-based architecture virtually eliminates the need for dynamic SQL and schema level locks, thereby drastically minimizing time consuming recompilation within the SQL Server.

CPExtended provides storage for logging error messages and performance data as well as background job scheduling and management.

InfinitiDB is the storage location for Intelligent Forms. The database stores the forms as well as the administration and configuration data.

### File path conventions

Throughout this document, the following conventions are used for common paths:

Convention	Meaning
<cp_root>	The root path of the Changepoint installation. The default is: C:\Program Files (x86)\Changepoint\Changepoint\
<cp_common>	The root location for common Changepoint utilities, such as the Login Settings utility. The default is: C:\Program Files (x86)\Common Files\Changepoint\Changepoint\

**Note:** The Login Settings utility is installed in

C:\Program Files\Common Files\Changepoint\Changepoint\LoginSettings\  
regardless of the root folder for Changepoint installation.

### Changepoint documentation

This guide contains references to the following documentation, which is available from the Changepoint Community (<https://support.changepoint.com>), team folders in Client Portal, or from your client manager:

- 2017 SP2 *Changepoint Product Architecture and Technology Matrix*
- 2017 SP2 *Changepoint Hardware Recommendations Guide*
- Changepoint 2017 SP1 *User Basics User Guide*
- Changepoint 2017 *Changepoint API Installation Guide*
- Changepoint 2017 *Microsoft Dynamics GP Toolkit Administration Guide*

### Hardware and software requirements

Changepoint server software can be deployed on a single server or on multiple servers.

Ensure that each server meets the following requirements:

- hardware requirements in the *Changepoint Hardware Recommendations Guide*.
- software requirements in the *Changepoint Product Architecture and Technology Matrix*

**Warning:** If the servers do not meet the hardware and software requirements, the installation might fail silently.

## Required skills

To install Changepoint, you must be familiar with administering the following software:

- Microsoft SQL Server
- Microsoft Windows Server
- Microsoft Internet Information Services (IIS)
- .NET

If you do not have these skills, or require assistance with implementing Changepoint, contact your Changepoint client services representative or client manager.

## Latest patches and service packs

Check the **2017 SP2 Release Notes and Patches** section in the [Changepoint Community](#) or team folder in Client Portal, for service packs and for general patches that have been posted for this release.

You install service packs and general patches according to the instructions in the service pack or patch release notes.

## Required accounts and permissions

You require the following credentials on each host:

- All servers – local or domain administrator account
- The user account running the SQL server service must have write permission to the Changepoint data and log folders.
- Database server:
  - SQL administrator (sa) account, which is required to install and configure the Changepoint database
  - SQL account, which is required for the Changepoint applications to access the database

If the SQL account does not already exist on the SQL Server, it is created with the same password as the user ID during installation. Therefore it is strongly recommended that you create this account with an appropriate password before you start installation.

### Installation considerations

#### Installation using Remote Desktop Protocol (RDP)

Set the connection to more than 256 colors in the RDP dialog:

#### Remote Desktop Connection > Display > Colors

Otherwise installation fails with the message:

```
"Error Number: 0x80004005 Description: Unspecified error Setup will now terminate"
```

#### Enabling enhanced session management

Keep the following points in mind if you plan to enable enhanced session management, which restricts authenticated users to one active session per browser container.

- Report scheduling and security – the Changepoint Report Prerender service required for the report scheduling feature is incompatible with Enhanced session management.
- Web server name
- Client Portal website
- Mobile access to Changepoint
- Naming constraints for the web server name – ensure that the web server name does not contain an underscore, otherwise client workstations need to connect to the server using the IP address instead of server name to log into Changepoint.

#### Custom headers to emulate Internet Explorer 7 mode for Report Designer websites

The Report Designer website requires a custom HTTP response header to emulate Internet Explorer 7 mode. The Changepoint installer takes care of this configuration.

**Note:** The EmulateIE7 custom header is not required for the Changepoint website.

1. Select **Start > Administrative Tools > Internet Information Services (IIS) Manager**.

The IIS Manager opens.

2. Expand the tree view and locate the website under **Sites**.

The home page of the website appears.

3. In the **IIS** section, double-click the **HTTP Response Headers** icon.



4. On the **Actions** menu, click **Add**.
5. In the **Name** field, enter “X-UA-Compatible.”
6. In the **Value** field, enter “IE=EmulateIE7”.
7. Click **OK**.

### **Removing emulate Internet Explorer 7 mode**

On the Changepoint web server, if Emulate IE7 was added *at the server/system level in IIS*, it may cause the Report Designer websites to crash, and alter the layout in the UI in Changepoint.

To correct this problem, in IIS Manager, remove any existing *server/system-level* HTTP Response Header that has Name “X-UA-Compatible” and Value “IE=EmulateIE7”.

### **Perform a backup**

To prevent data loss, back up each host before installation.

### **Install on a test environment first**

It is strongly recommended that you install the Changepoint database and applications in a test environment before installing in a production environment.

### **Required components on the web server**

The following are required on the web server:

- You must enable the following roles/features on IIS:
  - NET Framework 3.5 Features
  - WebSocket Protocol

Microsoft SQL Server Native Client 2012 SP1

### **SQL Server services required**

Before installing Changepoint, ensure that the following SQL Server services are running on the database server:

- SQL Server (MSSQLSERVER)
- SQL Server Agent (MSSQLSERVER)
- SQL FullText Filter Daemon Launcher (MSSQLSERVER)

### Installation parameters

Before you start installation, determine the values in the following table. You are prompted for this information during installation.

Information needed	Notes	Your installation value
Setup Language	<ul style="list-style-type: none"><li>• Dutch</li><li>• English</li><li>• French</li><li>• German</li><li>• Spanish</li></ul>	
New Instance, or Maintain or update an existing instance		
Setup type	<p><b>Complete</b> – installs the entire Changepoint application including the database files, website files, and tools on a single server. This is the recommended option for a new installation when all features will be installed on a single server.</p> <p><b>Database Only</b> – Installs the required database files and scheduled jobs. The Login Settings utility is also installed.</p> <p><b>Website Only</b> – Installs and configures only the web application files. Use this option to install the web application files on a separate server from the SQL database.</p> <p><b>Custom</b> – Installs the features that you select.</p> <p><b>Note:</b> For an upgrade, the features are preselected based on the previous installation. Clearing the check box of a feature uninstalls the feature from the machine.</p>	
Destination folders for application files		

Information needed	Notes	Your installation value
Destination Location (root folder for installation)	Default: C:\Program Files (x86) \Changepoint\Changepoint\ Referred to throughout this document as <cp_root>.	
Destination Location (Changepoint web application files)	Default: <cp_root>\Enterprise\	
Destination Location (Report Designer files)	Default: <cp_root>\ReportDesigner\	
Destination Location (Intelligent Forms web files)	Default: <cp_root>\Intelligent Forms\Websites\	
Destination Location (Web Services API files)	Default: <cp_root>\API\CP Web Services\	
Destination Location (Redis cache service)	<cp_root>\Redis\ Note: The Redis cache service will use "redisservice" as the service name and 6379 as the port number. If either is already in use, the Redis service install and startup will fail. Refer to the RedisCacheService.log file under the Changepoint InstallLog folder for details. You will need to perform manual steps to install and start the Redis service with a unique service name and port number. For more information, see "Installing and Configuring Redis" on page 31.	
<b>Website names and ports</b>		

## 1. Installation Requirements and Preparation

---

Information needed	Notes	Your installation value
Name and port for the Changepoint website	Default: Enterprise, 8080 <b>Note:</b> The name and port must be dedicated to the Changepoint website.	
Name of the Intelligent Forms application pool	Default: CPInfiniti	
Changepoint URL	URL, including the protocol (http or https) for end users to access Changepoint.	
<b>Destination locations for database files</b>		
Destination Location (Changepoint.mdf database file)	Default: <cp_root>\Database\Data\  For best performance, select a dedicated I/O channel (LUN, RAID set or physical disk) for each of the file types (.mdf, .ndf, and .ldf) If only three channels are available, you can put the log and tempdb on the same channel.	
Destination Location (Changepoint2.ndf database file)		
Destination Location (Changepoint3.ndf database file)		
Destination Location (Changepoint4.ndf database file)		
Destination Location (database log file)	Default: <cp_root>\Database\Log\	
Destination Location (Intelligent Forms database file - InfinitiDB.mdf)	Default: The same location as the Changepoint.mdf database file.	

Information needed	Notes	Your installation value
Destination Location (Intelligent Forms database log file - InfinitiDB.ldf)	Default: The same location as the Changepoint database log file.	
<b>Database login information</b>		
Database server	Select the SQL Server name where the Changepoint database will be installed.	
Login ID (SQL Server)	sa	
Password (SQL Server)	password for the sa account	
Database Name	Recommended default: Changepoint	
User ID for the SQL account that will be used for the database connection	Used in the Login Settings (Connection settings) setup.	
Intelligent Forms database name	Recommended default: InfinitiDB	
<b>Mode</b>		
Mode	<ul style="list-style-type: none"> <li>PSA – Changepoint PSA (Professional Services Automation)</li> <li>ITD – Changepoint PPM (Project Portfolio Management)</li> </ul>	



## 2. Installing Required Changepoint Components

---

### Installing Changepoint using the installer

The installer sets the Anonymous Authentication Credential to use Application Pool Identity. The Changepoint website is assigned to its own application pool (*sitename\_AppPool*).

1. Copy the contents of the product media to a location on the server.
2. Run the `setup.exe` file from the copied location.

The Changepoint 2017 SP2 window opens.

3. On the **Changepoint** tab, click the **Install Changepoint 2017 SP2** link.
4. At each prompt, select or type the appropriate parameter from the table in "Installation parameters" on page 18, and click **OK** or **Next** to move to the next prompt.
5. After you select the **Changepoint Application Mode**, click **Next**.

The **Start Copying Files** screen appears.

6. Review the current settings to ensure all information is correct.
7. If correct, click **Next** to continue with the installation.

When installation is complete, the **InstallShield Wizard Complete** screen displays.

8. To review the installation log for any errors or warnings, select **I would like to open the Installation Log file**. The installation log file provides details about the issues that were encountered and possible remedies that you can apply manually after the installation.
9. To run the Login Settings utility after the installation, select **I would like to launch Login Settings (Connection Settings)**. This utility is used to configure and encrypt the connection settings for security purposes. At this time, you can configure the connection settings for:
  - Changepoint
  - Enterprise\global.asa
  - Enterprise Report Server\global.asa
  - Enterprise\WebAPI\web.config
  - Enterprise\WebSocket\web.config

- Intelligent Forms\Websites\InfinitiLaunch\web.config
- Intelligent Forms\Websites\IntelledoxSchedulerIntelledoxScheduler.exe.config
- Intelligent Forms\Websites\ChangepointDataService\web.config
- Intelligent Forms\Websites\Manage\web.config
- Intelligent Forms\Websites\Product\web.config

**Note:** For new Changepoint installations, the Intelligent Forms web.config files are preconfigured

- API\CP Web Services\web.config
- the executables associated with Changepoint scheduled jobs

See "About configuring database connection settings" on page 65 for instructions.

10. Click **Finish**.
11. To install additional instances of Changepoint on this server, see "Installing multiple Changepoint instances" on page 24.
12. Configure Redis. For more information, see "About Redis" on page 31
13. Complete the post-installation instructions.

For more information, see "Configuring Changepoint" on page 47.

### Installing multiple Changepoint instances

You can run the InstallShield Wizard as many times as needed on the same servers to install multiple Changepoint websites and databases.

A common scenario for creating multiple databases on a server is setting up training and test environments. For more information, see "Creating a Test and Training Environment" on page 191.

Note the following:

- The Changepoint website names and database names must be unique for each instance on the server.
- The port number for each Changepoint website on the server must be unique.



- Scheduled jobs are created for each database with the database name prepended to the job names.
  - You must configure the database access settings for the appropriate database and the applicable .exe jobs
  - Because you can install only one instance of each Changepoint Windows service (for example, Report Prerender Service, Report Scheduler Service, and Changepoint Mail Service) on a server, Windows service instances for each database after the first must be set up on separate servers.
1. Install the first website instance using the procedure described in "Installing Changepoint using the installer" on page 23.
  2. Run the `setup.exe` file again.

The **Changepoint 2017 SP2** window opens.

3. On the **Changepoint** tab, click the **Install 2017 SP2** link.

The **Existing Installed Instances Detected** screen displays.

4. Select the **Install a new instance** option, and then click **Next**.
5. The remaining steps are the same as the standard procedure for installing using the wizard.

**Note:** Be sure to change the service name and port number for the additional Redis service from the default values or the install and startup will fail. Refer to the RedisCacheService.log file under the Changepoint InstallLog folder for details. You will need to perform manual steps to install and start the Redis service with a unique service name and port number. For more information, see "Installing and Configuring Redis" on page 31.

## Modifying a Changepoint instance

To add or remove features, use the Windows Control Panel, or run the InstallShield Wizard again on an installed Changepoint instance.

**Note:** You must use SQL Server Management Studio to remove a database.

### Modifying Changepoint using the InstallShield Wizard

1. Run the `setup.exe` file again.

The **Changepoint 2017 SP2** window opens.

2. On the **Changepoint** tab, click the **Install Changepoint 2017 SP2** link.

The **Existing Installed Instances Detected** screen displays.

3. Do the following:
  - a. Select the **Maintain or update the instance of this application selected below** option.
  - b. Select the instance that you want to modify from the list of instances.
  - c. Click **Next**.

The **Welcome** screen appears.

4. Select the **Modify** option and click **Next**.

The **Select Features** screen displays.

5. Do the following:
  - To install a feature, select the check box.
  - To remove a feature, clear the check box.
6. The remaining steps are the same as the standard procedure for using the wizard.

## Uninstalling a Changepoint instance

You can uninstall Changepoint using the Windows Control Panel, or the InstallShield Wizard.

**Note:** All features are removed except the database. To remove the database you must use SQL Server.

If you uninstall Changepoint after an upgrade, the previous installation of Changepoint is not restored.

To uninstall a Changepoint instance using the InstallShield Wizard

1. Run the setup.exe file.

The **Changepoint** window appears.
2. On the **Changepoint** tab, click the **Install Changepoint** link.

The **Existing Installed Instances Detected** screen appears.
3. Do the following:

- a. Select the **Maintain or update the instance of this application selected below** option.
- b. Select the instance that you want to uninstall.
- c. Click **Next**.

The **Preparing Setup** screen appears, followed by the **Welcome** screen.

4. Select the **Remove** option, and then click **Next**.
5. Click **OK** to confirm.
6. Click **Finish**.

## Installing the Changepoint database manually

When you install the database manually, you must also install the scheduled jobs, CPTempDB, and CPExtendedDB.

The default name of the CPTempDB database is: <Changepoint database name>\_CPTempDb, and the default location is the location of the Changepoint database files (mdf, ldf). However, you can specify a different name and location, if necessary.

1. Review "Destination locations for database files" on page 20.
2. Copy the following database files for the appropriate language from the Changepoint product media to the target locations on the database server:

```
\Changepoint\Manual Install\New Database\<language>\Changepoint.mdf
\Changepoint\Manual Install\New Database\<language>\Changepoint2.ndf
\Changepoint\Manual Install\New Database\<language>\Changepoint3.ndf
\Changepoint\Manual Install\New Database\<language>\Changepoint4.ndf
\Changepoint\Manual Install\New Database\<language>\Changepoint_log.ldf
```

Ensure that the newly copied files are read-write.

3. From the Changepoint product media, copy the files from the following folder:

```
\Changepoint\Manual Install\New Database\
```

to:

```
<cp_root>
```

**Note:** For the remaining steps in this procedure, use the files in the destination folder.

After installation is complete you can delete the files in the destination folder.

4. Connect to the database server using the SQL server `sa` account or equivalent:

- a. Manually attach the Changepoint database to the server..
  - b. If the database name is not “Changepoint”, replace “Changepoint” with the database name.
5. Execute the following:
- `Exec DBM_EnableSQLDependency 'webconfiguser'`
  - `Exec DBM_SetupCPTempDB`
  - `Exec DBM_SetupCPEExtended`
  - `Exec DBM_SetupFullText`

### Installing the scheduled jobs manually

1. Execute the following against the Changepoint database to set up scheduled jobs:

```
Exec DBM_SetupScheduledJob
```

2. Do the following:

- a. Copy the Login Settings utility (Login Settings.exe) from:

```
<cp_root>\Manual Install\Components\LoginSettings\
```

to:

```
<cp_common>\LoginSettings\
```

- b. Run the Login Settings utility on the configuration files to configure the database connection settings:
  - Enterprise\global.asa
  - Enterprise Report Server\global.asa
  - Enterprise\WebAPI\web.config
  - Enterprise\WebSocket\web.config
  - API\CP Web Services\web.config\web.config
- c. Run the Login Settings utility on `CPEffectiveDates.exe.config` to configure the database connection settings.
- d. Run the Login Settings utility on `CPGuestLicenses.exe.config` to configure the database connection settings.

For more information on the Login Settings utility, see "About configuring database connection settings" on page 65.

## Installing the Infiniti database manually

When you install the Changepoint database manually, you must also install the Infiniti database manually.

The default name is InfinitiDB, and the default location is the location of the Changepoint database files (mdf, ldf). You can specify a different name and location, if necessary.

1. Review the destination locations for database files in "Installation parameters" on page 18.
2. From the Changepoint product media:

- a. Copy the following files to the target locations on the database server:

```
\Changepoint\Intelligent Forms\Database\InfinitiDB.MDF  
\Changepoint\Intelligent Forms\Database\InfinitiDB.LDF
```

- b. Ensure the files are read-write.
- c. Copy the files from the \Changepoint\Manual Install\New Database\Setup\_InfinitiDB.sql folder to <cp\_root>.
- d. Ensure that the .sql files are read-write.

**Note:** For the remaining steps in this procedure, use the files in the destination folder.

After installation is complete you can delete the files in the destination folder.

3. Connect to the database server using the SQL server sa account or equivalent.
4. Edit Setup\_InfinitiDB.sql by replacing the following placeholder text with actual values from the Changepoint instance:
  - @CP\_DB\_SERVER@ = SQL Server instance where Changepoint database resides
  - @MDFPATH@ = Physical path to the InfinitiDB.mdf database file (for example, D:\SQL\Database\InfinitiDB.mdf)
  - @LDFPATH@ = Physical path to the InfinitiDB.ldf database log file (for example, L:\SQL\Log\InfinitiDB.ldf)
  - @CP\_DATABASE@ = Changepoint database name (for example, Changepoint)
  - @INF\_DATABASE@ = Infiniti database name (for example, InfinitiDB)

## 2. Installing Required Changepoint Components

---

- @CP\_USERID@ = SQL account used for Changepoint connection set via the Login Settings utility
  - @CP\_PASSWORD@ = Password for the Changepoint SQL userid
  - @WSAPI\_URL@ = URL for the Changepoint Web Services API (for example, [https://{changepoint\\_website}/CPWebService](https://{changepoint_website}/CPWebService))
  - @INF\_URL@ = URL for the Intelligent Forms web application (for example, [https://{changepoint\\_website}/Infiniti](https://{changepoint_website}/Infiniti))
5. Execute `Setup_InfinitiDB.sql`.
  6. Configure Intelligent Forms. For more information, see "Configuring Intelligent Forms" on page 134.

## 3. Installing and Configuring Redis

---

### About Redis

Redis is an open source (BSD licensed), in-memory data structure store, used as a database, cache and message broker. Redis also supports master-slave asynchronous replication and optionally provides high availability with Redis Sentinel.

Redis is designed to be accessed by trusted clients inside trusted environments. Therefore, the Redis instance must not be exposed directly to the Internet or to an environment where untrusted clients can directly access the Redis TCP port. Redis should be directly accessible only by authorized operators, and the computers that implement the application that uses Redis.

While Redis does not implement Access Control, it does provide a simple layer of authentication that you can enable by editing the `redis.windows.conf` file. When the authentication layer is enabled, Redis will refuse any query by clients that are not authenticated. A client can authenticate itself by sending the `AUTH` command followed by the password.

The goal of the authentication layer is to optionally provide a layer of redundancy. If firewalls or any other system that was implemented to protect Redis from external attackers fail, an external client will still not be able to access the Redis instance without providing the authentication password.

### About installing the Redis server

The Changepoint installer automatically creates a new Redis Server instance that is preconfigured for a single web server deployment. The installer also creates a new Redis service instance that has a temporary authentication password and is linked one-to-one with the Changepoint website instance that is being installed or upgraded on the web server.

The startup configuration for the Redis Server is in the `redis.windows.conf` file in the Redis Server folder, and the corresponding Redis cache settings are in the `web.config` file for the website.

The following are the default settings for the Redis service:

- name – RedisService
- port – 6379
- authentication password is required (temporary password is provided)

**Warning:** It is highly recommended that you use a strong password that is unique to your organization. For more information about the importance of using a strong password, see the `redis.windows.conf` file.

**Note:** This guide includes the basic information that is required to install and configure Redis for use with Changepoint. For more information, see the Redis website at <https://redis.io/>.

#### Multiple web servers

If you are setting up multiple Changepoint website instances that are load balanced across multiple web servers, then the Redis Server installed and preconfigured with the default service name, port, and authentication password on each instance. You must designate a master server and configure the remaining server instances as slave servers.

### Common Redis commands

Use these commands for Redis service installations.

#### Installing the Redis service manually

```
redis-server --service-install redis.windows.conf --service-name RedisService --port 6379
```

The service is configured as Autostart and will be launched as "NT AUTHORITY\NetworkService". Upon successful installation, a success message is displayed and Redis exits. Redis will listen on the specified port number.

This command does not start the service.

#### Uninstalling the Redis service

```
redis-server --service-uninstall --service-name RedisService
```

This command removes the Redis service configuration information from the registry. Upon successful uninstallation, a success message is displayed and Redis exits.

This command does not stop the service. To remove the service completely, stop the service first.

#### Starting the Redis service

```
redis-server --service-start --service-name RedisService
```



This command starts the Redis service. Upon successful startup, a success message is displayed. You can also start the service by using the Services dialog or the `net start` command.

### Stopping the Redis service

```
redis-server --service-stop --service-name RedisService
```

This command stops the Redis service. Upon successful termination, a success message is displayed and Redis exits. You can also stop the service by using the Services dialog or the `net stop` command.

### Naming the Redis service

```
--service-name name
```

This parameter can be used with any of the preceding commands to set the name of the installed service. This command is required if you plan on deploying multiple instances (for example, development, test, production) of Changepoint on the same server because each Changepoint instance requires a separate Redis instance. If there are only one instance of the Changepoint website on the machine, the service name change is not required.

### Specifying the Redis server port

```
--port 6379
```

You can use this parameter to configure the port that Redis listens on. If you do not configure a port, Redis uses the port that is specified in the `redis.windows.conf` file (default port is 6379). If you are accessing Redis from an external machine you must ensure that a firewall exception exists.

## Single web server deployment

This configuration is set up by default when you use the Changepoint installer to install or upgrade. A single web server deployment requires a single Redis master server, which is responsible for all requests (read/write).

You must do the following:

- Configure a single Changepoint web server: Web01
- Implement a single master Redis server with authentication enabled:
  - Redis service name: RedisService
  - Redis port: 6379

**Note:** To edit the Redis configuration file (`redis.windows.conf`), you require a text editor, such as Notepad++, that recognizes Unix-style line breaks. You cannot use Windows Notepad for this purpose.

1. Configure Redis authentication:

- a. Open the `redis.windows.config` and locate the following lines:

```
requirepass 6ed18d5c7df443940...
masterauth 6ed18d5c7df443940...
```

- b. Replace the temporary authentication password with a strong password that is unique to your organization. For more information see the note about `requirepass` in the configuration file.

**Warning:** It is strongly recommended that you use a strong password that is unique to your organization. For more information about the importance of using a strong password, see the `redis.windows.conf` file.

2. Install the Redis Server as a service:

```
redis-server --service-install redis.windows.conf --service-name RedisService --port 6379
```

After installation, the RedisService is available in the Windows Service Management Console.

3. Start the Redis Server service:

```
redis-server --service-start --service-name RedisService
```

The Redis master server configuration is complete and ready to accept connections.

4. Configure the Changepoint web site:

- a. In the Changepoint `web.config` file, locate the following lines:

```
<add key="cache.Password" value="6ed18d5c7df443940..." />
<add key="cache.Servers" value="servername:6379" />
```

- b. Replace the values of the authentication password, server and port number as specified in the Redis configuration file.

- c. Repeat for the WebAPI `web.config` file.

- d. Repeat for the WebSockets `web.config` file.

5. Configure the `global.asa` file:

- a. Locate the following lines:

```
Application("cache.Password") = "6ed18d5c7df443940..."  
Application("cache.Servers") = "servername:6379"
```

- b. Replace the values of the authentication password, server, and port number as specified in the Redis configuration file.

## Multiple web server deployment, without high availability

A multiple web server deployment requires a Redis server to be designated as the Redis master, and all additional servers to be configured as Redis slave servers. In this type of environment, all read/write requests are directed to the master, and read-only requests preferably target a Redis slave server.

**Note:** With this configuration, if the master server goes down, then an operator must intervene manually to promote a slave server to the master role.

The process for configuring this sample deployment includes the following:

- Two Changepoint web servers:
    - Web01 (Redis Master)
    - Web02 (Redis Slave)
  - A single master Redis server with authentication enabled:
    - Redis service name: RedisService\*
    - Redis port: 6379\*
  - A single slave server Redis server with authentication enabled:
    - Redis service name: RedisService
    - Redis port: 6379
1. Configure Web01 as the Redis master server by following the procedure in "Single web server deployment" on page 33, but do not configure the Changepoint web site.
  2. Configure Web02 as the Redis slave server:
    - a. Follow the procedure in "Single web server deployment" on page 33, but do not configure the Changepoint web site.
    - b. Navigate to the Redis installation path (default installation path is <cp\_root>\Redis).

- c. Configure Redis Replication. Open the `redis.windows.config` and locate the following lines:

```
# slaveof <masterip> <masterport>
# masterauth <master-password>
```

- d. Uncomment the lines, and configure the replication parameters:

```
slaveof Web01 6379
masterauth 6ed18d5c7df443940...
```

**Note:** The passwords used for `masterauth` and `requirepass` must all be the same within a master-slave configuration.

3. Install the Redis Service:

```
redis-server --service-install redis.windows.conf --service-name RedisService --port 6379
```

4. Start the Redis Server service:

```
redis-server --service-start --service-name RedisService
```

The Redis slave server configuration is complete, and ready to accept connections.

5. Configure the Changepoint web sites. Make the following edits to the `web.config` files on all web servers:

- a. In the Changepoint `web.config` file, locate the following line:

```
<add key="cache.Password" value="6ed18d5c7df443940..." />
```

- a. Replace the value of the authentication password.

- b. In the following line:

```
<add key="cache.Servers" value="Web01:6379;Web02:6379" />
```

- c. Add the values for all of the Redis servers and their port numbers as specified in the Redis configuration file.

- d. Make the same changes in the WebAPI `web.config` file.

- e. Make the same changes in the WebSockets `web.config` file.

6. Make the following edits to the `global.asa` files on all web servers:

- a. Locate the following lines:

```
Application("cache.Password") = "6ed18d5c7df443940..."
Application("cache.Servers") = "servername:6379"
```

- b. Replace the values of the authentication password
- c. Add the values for all of the Redis servers and their port number as specified in the Redis configuration file.


**Note:** The `cache.Servers` value must contain all Redis servers and their defined listening ports, separated by semicolons. For example:

```
Application("cache.Servers") = "Web01:6780;Web02:6781;Web03:6379;Web04:6379"
```

## Multiple web server deployment with high availability

Using Redis Sentinel, you can create a Redis deployment that handles service outages without manual intervention. Redis Sentinel provides monitoring of the Redis deployments, and automatic failover when failures occur.

The high availability configuration is based on a multiple server deployment to which Redis Sentinel is added. Therefore the starting point is to create a multiple server deployment as described in "Multiple web server deployment, without high availability" on page 35. The following diagram outlines the deployment.

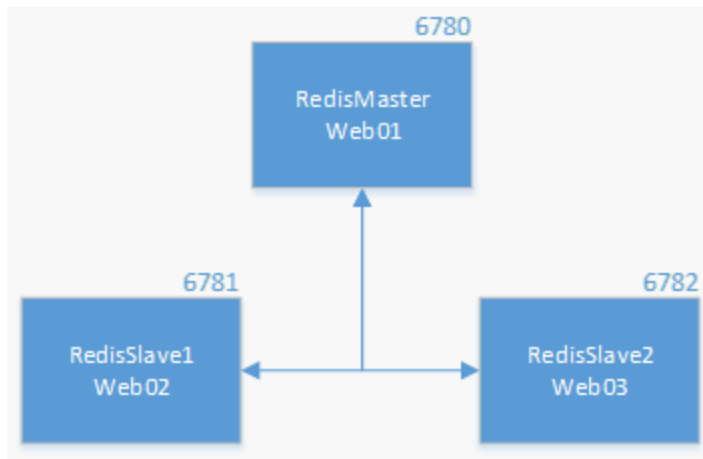

The process for configuring this sample deployment includes the following:

- Configure three Changeport web servers:
  - Web01 (RedisMaster)
  - Web02 (RedisSlave1)
  - Web03 (RedisSlave2)
- Implement single master Redis server with authentication enabled

- Redis service name: RedisMaster
- Redis port: 6780
- Implement slave instance of Redis server with authentication enabled
  - Redis service name: RedisSlave1
  - Redis port: 6781
- Implement slave instance of Redis server with authentication enabled
  - Redis service name: RedisSlave2
  - Redis port: 6782
- Implement Redis Sentinel

## Configure a multiple server deployment

Configure a multiple server deployment by following the procedures in "Multiple web server deployment, without high availability" on page 35

## Installing Redis Sentinel

1. On each of the web servers, copy the existing Redis folder to a folder named Sentinel.

**Note:** Each web server can have only one Sentinel instance, regardless of the number of websites that are installed on the server.

2. From the Sentinel folder, edit the following lines in the `sentinel.conf` file by replacing the port number and password with the appropriate values:

```
port <sentinel-port>
sentinel monitor <master-name> <ip> <redis-port> <quorum>
sentinel auth-pass <master-name> <password>
sentinel down-after-milliseconds <master-name> <milliseconds>
sentinel failover-timeout <master-name> <milliseconds>
sentinel parallel-syncs <master-name> <numslaves>
logfile "sentinel.log"
```

Based on the example in this guide, the values would be:

```
port 26380
sentinel monitor RedisMaster Web01 6780 2
sentinel auth-pass RedisMaster rx6RB2CHt1lYkQnm$2jc3#CgL
sentinel down-after-milliseconds RedisMaster 30000
sentinel failover-timeout RedisMaster 180000
```

```
sentinel parallel-syncs RedisMaster 1
logfile "sentinel.log"
```

**port <sentinel-port>**

The port that the Sentinel instance will run on.

**sentinel monitor <master-name> <ip> <redis-port> <quorum>**

Specifies the master server to be monitored, and to consider it in ODOWN (Objectively Down) state only if at least the number of Redis Sentinel servers specified in <quorum> agree.

**Warning:** The master name cannot include special characters or spaces. The valid characters are: A-z, 0-9, and the characters ".-\_" (period, dash, and underscore).

**Note:** Regardless of the number that is defined as the ODOWN quorum, the majority of Redis Sentinel servers must be online to start the failover process. In this example, if the quorum of two (2) Sentinel instances detect that the master Web01 is not available, the failover process begins the process of promoting one of the slave servers as the new master.

Slave servers are autodiscovered by Sentinel, therefore you do not have to specify slave servers in any way. Sentinel rewrites the configuration file by adding the slave servers using additional configuration options. The configuration file is also rewritten when a slave server is promoted to master.

**sentinel auth-pass <master-name> <password>**

Set the password to use to authenticate with the master and slave servers. Useful if there is a password set in the Redis instances to monitor.

**sentinel down-after-milliseconds <master-name> <milliseconds>**

Number of milliseconds that the master (or any attached slave server or Sentinel server) must be unavailable (as in, not accepting reply to PING, continuously) to be considered in S\_DOWN state (Subjectively Down).

**sentinel failover-timeout <master-name> <milliseconds>**

Specifies the failover timeout in milliseconds.

#### **sentinel parallel-syncs <master-name> <numslaves>**

The number of slave servers that can be reconfigured simultaneously to point to the new slave server during a failover. Use a low number to avoid all slave servers being unreachable while performing a synchronization with the master.

#### **Starting Redis Sentinel (Console mode)**

From a command line prompt on each of the servers, go to the `Sentinel` folder, and issue the following command:

```
redis-server sentinel.conf --sentinel
```

As each Sentinel server comes online, you should receive output similar to the following:

```
[5372] 16 Jan 11:54:18.485 # Sentinel runid is 5b50429514954dab8f24a099aaf3e1442fe2f2ac
[5372] 16 Jan 11:54:18.486 # +monitor master RedisMaster 127.0.0.1 6780 quorum 2
[5372] 16 Jan 11:54:56.816 * -dup-sentinel master RedisMaster 127.0.0.1 6780 #duplicate of
127.0.0.1:26381 or 3b1854570beabaaac8551db88bb5dd51625424c2
[5372] 16 Jan 11:54:56.817 * +sentinel sentinel 127.0.0.1:26381 127.0.0.1 26381 @
RedisMaster 127.0.0.1 6780
[5372] 16 Jan 11:55:02.787 * -dup-sentinel master RedisMaster 127.0.0.1 6780 #duplicate of
127.0.0.1:26383 or 53525d1ebcbb8627ed3dcfbcb84b858e31626c2db
[5372] 16 Jan 11:55:02.788 * +sentinel sentinel 127.0.0.1:26383 127.0.0.1 26383 @
RedisMaster 127.0.0.1 6780
```

The output shows that each Sentinel server found the master server and autodiscovered the slaves. This particular configuration is hosted on the same machine, which is why there are multiple references to 127.0.0.1.

If the master were to go offline, you will receive output similar to the following:

```
[5372] 16 Jan 12:00:42.415 # +sdown master RedisMaster 127.0.0.1 6780
[5372] 16 Jan 12:00:42.475 # +odown master RedisMaster 127.0.0.1 6780 #quorum 2/2
[5372] 16 Jan 12:00:42.475 # +new-epoch 4
[5372] 16 Jan 12:00:42.475 # +try-failover master RedisMaster 127.0.0.1 6780
[5372] 16 Jan 12:00:42.476 # +vote-for-leader 5b50429514954dab8f24a099aaf3e1442fe2f2ac 4
[5372] 16 Jan 12:00:42.478 # 127.0.0.1:26383 voted for
5b50429514954dab8f24a099aaf3e1442fe2f2ac 4
[5372] 16 Jan 12:00:42.478 # 127.0.0.1:26381 voted for
5b50429514954dab8f24a099aaf3e1442fe2f2ac 4
[5372] 16 Jan 12:00:42.567 # +elected-leader master RedisMaster 127.0.0.1 6780
[5372] 16 Jan 12:00:42.571 # +failover-state-select-slave master RedisMaster 127.0.0.1
6780
[5372] 16 Jan 12:00:42.662 # +selected-slave slave 127.0.0.1:6781 127.0.0.1 6781 @
RedisMaster 127.0.0.1 6780
```



```
[5372] 16 Jan 12:00:42.662 * +failover-state-send-slaveof-noone slave 127.0.0.1:6781
127.0.0.1 6781 @ RedisMaster 127.0.0.1 6780
[5372] 16 Jan 12:00:42.726 * +failover-state-wait-promotion slave 127.0.0.1:6781 127.0.0.1
6781 @ RedisMaster 127.0.0.1 6780
[5372] 16 Jan 12:00:43.534 # +promoted-slave slave 127.0.0.1:6781 127.0.0.1 6781 @
RedisMaster 127.0.0.1 6780
[5372] 16 Jan 12:00:43.536 # +failover-state-reconf-slaves master RedisMaster 127.0.0.1
6780
[5372] 16 Jan 12:00:43.599 * +slave-reconf-sent slave 127.0.0.1:6782 127.0.0.1 6782 @
RedisMaster 127.0.0.1 6780
[5372] 16 Jan 12:00:44.562 * +slave-reconf-inprog slave 127.0.0.1:6782 127.0.0.1 6782 @
RedisMaster 127.0.0.1 6780
[5372] 16 Jan 12:00:44.562 * +slave-reconf-done slave 127.0.0.1:6782 127.0.0.1 6782 @
RedisMaster 127.0.0.1 6780
[5372] 16 Jan 12:00:44.628 # -odown master RedisMaster 127.0.0.1 6780
[5372] 16 Jan 12:00:44.628 # +failover-end master RedisMaster 127.0.0.1 6780
[5372] 16 Jan 12:00:44.628 # +switch-master RedisMaster 127.0.0.1 6780 127.0.0.1 6781
[5372] 16 Jan 12:00:44.629 * +slave slave 127.0.0.1:6782 127.0.0.1 6782 @ RedisMaster
127.0.0.1 6781
[5372] 16 Jan 12:00:44.629 * +slave slave 127.0.0.1:6780 127.0.0.1 6780 @ RedisMaster
127.0.0.1 6781
```

In this scenario, 2 Sentinel servers agreed that the master is not responding. Because the majority of Sentinel servers are online, a leader is agreed upon and a new master (6781) is elected and all remaining slaves are reconfigured accordingly. The Sentinels continue to monitor for the missing server.

If the old master comes back online you will see similar output to the following:

```
[5596] 16 Jan 12:05:55.564 * +convert-to-slave slave 127.0.0.1:6780 127.0.0.1 6780 @
RedisMaster 127.0.0.1 6781
```

**Note:** Sentinel does not promote the old master, but reconfigures it as a slave of the new master.

## Installing Redis Sentinel Service

From a command line prompt on each of the servers, go to the `Sentinel` folder and issue the following command:

```
redis-server --service-install sentinel.conf --service-name Sentinel --sentinel
```

The service is configured as Autostart and will be launched as "NT AUTHORITY\NetworkService". Upon successful installation, a success message is displayed and Redis exits. Sentinel will listen on the port number that is specified in the `sentinel.conf` file.

This command does not start the service.

#### Uninstalling Redis Sentinel Service

From a command line prompt on each of the servers, go to the `Sentinel` folder and issue the following command:

```
redis-server --service-uninstall sentinel.conf --service-name Sentinel --  
sentinel
```

This command removes the Sentinel service configuration information from the registry. Upon successful uninstallation, a success message is displayed and Redis exits.

This command does not stop the service.

#### Starting the Redis Sentinel Service

```
redis-server --service-start --service-name Sentinel
```

This command starts the Redis Sentinel service. Upon successful startup, a success message is displayed and Redis service is started. You can also start the service by using the Services dialog or the `net start` command.

#### Stopping the Redis Sentinel Service

```
redis-server --service-stop --service-name Sentinel
```

This command stops the Redis Sentinel service. Upon successful termination, a success message is displayed and Redis exits. You can also stop the service by using the Windows Services Management Console or the `net stop` command.

### Common Redis Sentinel commands

#### Querying the status of Redis Sentinel

Redis is installed with client application called `redis-cli.exe` that enables command line console to interact with and manage Redis and Redis Sentinel services.

```
redis-cli -p 26380  
127.0.0.1:26380> ping  
PONG  
127.0.0.1:26380>
```

#### Show the state and information of a master

```
SENTINEL master <master name>
```

Example:

```
sentinel master MyRedisInstance
127.0.0.1:26380> SENTINEL master MyRedisInstance
1) "name"
2) "MyRedisInstance"
3) "ip"
4) "127.0.0.1"
5) "port"
6) "6781"
7) "runid"
8) "5a9d14a5a72c87e203a92650c4cd17dfe1f66394"
9) "flags"
10) "master"
11) "pending-commands"
12) "0"
13) "last-ping-sent"
14) "0"
15) "last-ok-ping-reply"
16) "117"
17) "last-ping-reply"
18) "117"
19) "down-after-milliseconds"
20) "60000"
21) "info-refresh"
22) "2113"
23) "role-reported"
24) "master"
25) "role-reported-time"
26) "815163"
27) "config-epoch"
28) "4"
29) "num-slaves"
30) "2"
31) "num-other-sentinels"
32) "2"
33) "quorum"
34) "2"
35) "failover-timeout"
36) "180000"
37) "parallel-syncs"
38) "1"
```

### **Return the IP address and port number of a master**

```
SENTINEL get-master-addr-by-name <master name>
```

#### **Example:**

```
127.0.0.1:26380> sentinel get-master-addr-by-name MyRedisInstance
1) "127.0.0.1"
```

```
2) "6781"  
127.0.0.1:26380>
```

#### **Show a list of slave servers and their states for a master**

```
SENTINEL slaves <master name>
```

#### **Example:**

```
127.0.0.1:26380> sentinel slaves MyRedisInstance  
1) 1) "name"  
2) "127.0.0.1:6782"  
3) "ip"  
4) "127.0.0.1"  
5) "port"  
6) "6782"  
7) "runid"  
8) "9925a92da3a3770684532dd77cdf687b72137b0d"  
9) "flags"  
10) "slave"  
11) "pending-commands"  
12) "0"  
13) "last-ping-sent"  
14) "0"  
15) "last-ok-ping-reply"  
16) "582"  
17) "last-ping-reply"  
18) "582"  
19) "down-after-milliseconds"  
20) "60000"  
21) "info-refresh"  
22) "3686"  
23) "role-reported"  
24) "slave"  
25) "role-reported-time"  
26) "1228352"  
27) "master-link-down-time"  
28) "0"  
29) "master-link-status"  
30) "ok"  
31) "master-host"  
32) "127.0.0.1"  
33) "master-port"  
34) "6781"  
35) "slave-priority"  
36) "100"  
37) "slave-repl-offset"  
38) "1939136"  
2) 1) "name"
```

```
2) "127.0.0.1:6780"
3) "ip"
4) "127.0.0.1"
5) "port"
6) "6780"
7) "runid"
8) "33c8446fd8218705843aac4f057aaf7812eb9699"
9) "flags"
10) "slave"
11) "pending-commands"
12) "0"
13) "last-ping-sent"
14) "0"
15) "last-ok-ping-reply"
16) "582"
17) "last-ping-reply"
18) "582"
19) "down-after-milliseconds"
20) "60000"
21) "info-refresh"
22) "3686"
23) "role-reported"
24) "slave"
25) "role-reported-time"
26) "1228352"
27) "master-link-down-time"
28) "0"
29) "master-link-status"
30) "err"
31) "master-host"
32) "127.0.0.1"
33) "master-port"
34) "6781"
35) "slave-priority"
36) "100"
37) "slave-repl-offset"
38) "1"
```

## Common Redis Sentinel scenarios

To view the complete set of Redis commands, go to: <https://redis.io/commands>.

**Scenario: Master server goes off line, need to promote a slave server to master.**

```
localhost:6781> SLAVEOF NO ONE
```

**Scenario: New master has been designated, need to attach existing slave servers to new master (localhost 6781).**

```
localhost:6782> SLAVEOF localhost 6781
localhost:6783> SLAVEOF localhost 6781
```

**Scenario: Query current replication settings**

```
localhost:6780> INFO Replication
# Replication
role:master
connected_slaves:1
slave0:ip=::f0f3:a200:0:0,port=6781,state=online,offset=3025,lag=0
master_repl_offset:3025
repl_backlog_active:1
repl_backlog_size:1048576
repl_backlog_first_byte_offset:2
repl_backlog_histlen:3024
```

**Scenario: Query information related to memory consumption**

```
localhost:6780> INFO Memory
# Memory used_memory:2011808
used_memory_human:1.92M
used_memory_rss:1938032
used_memory_peak:2048576
used_memory_peak_human:1.95M
used_memory_lua:36864
mem_fragmentation_ratio:0.96
mem_allocator:jemalloc-3.6.0
```

**Using arguments to send a command to redis-cli**

```
C:\Redis>redis-cli -h localhost -p 6780 -a "rx6RB2CHt1lYkQnm$2jc3#CgL" PING
PONG
```

## 4. Configuring Changepoint

---

### Overview of configuration

After you have completed the installation, perform the following configuration steps:

1. Configure the settings for token authentication as follows:
  - a. Open the `Enterprise\Web.config` file, and then replace the default value of the `WebApiSecret` setting with a unique string of UTF-8 characters with a recommended size of 64 bytes. For example, you can use any combination of 64 single byte characters.
  - b. Open the `Enterprise\WebAPI\Web.config` file and then replace the value of `WebApiSecret` with the same unique string used above.
  - c. Open the `Enterprise\WebSockets\Web.config` file, and then replace the value of `WebApiSecret` with the same unique string used above.
  - d. In a load balanced environment, ensure that you use the same `WebAPISecret` value within the environment.

**Note:** For security reasons, it is strongly recommended that you use a different `WebAPISecret` value for each Changepoint instance that you deploy.

2. Set the permissions on the Changepoint folders.

For more information, see "Setting permissions on the Changepoint folders" on page 48.

3. Review the default settings for the Changepoint scheduled jobs, and change them as required.

For more information, see "Configuring Changepoint Scheduled Jobs" on page 83.

4. Install and set up the optional components as required. For more information, see:
  - "Installing Changepoint Windows Services" on page 51.
  - "About creating and configuring an archive database" on page 225
  - "Installing and Configuring Single Sign-on (SSO)" on page 139
  - "Setting up mobile access to Changepoint" on page 147.
  - "Installing the Changepoint online help" on page 145.
  - "Setting up a Client Portal website" on page 147

- "Setting up a survey response website" on page 148.
  - "About Microsoft Exchange/Outlook synchronization" on page 149
  - "Configuring batch printing" on page 150.
  - "About installing Changepoint APIs" on page 151.
5. If you have not already done so, configure the database connection settings for the Changepoint websites, installed Windows services, and scheduled job executables.  
  
For more information, see "Configuring database connection settings" on page 65.
  6. To verify connectivity, sign into all websites.
  7. Review "Optimizing Performance" on page 183 for performance optimization recommendations.
  8. Run the chained scheduled jobs by starting Update Time Rate, and ensure that Resource Demand Calculation completes successfully.
  9. As required, enable or disable financial analysis record types. For more information, see "Enabling financial analysis record types" on page 223.
  10. As required, add fiscal periods to group data. For more information, see "Adding fiscal periods to group financial analysis data" on page 223.

### Setting permissions on the Changepoint folders

On the web server:

1. Set NTFS security for the Changepoint\tempimages folder to allow Full Control for all users and groups.
2. To allow users to export survey results, grant authenticated users **Modify** access to the `<cp_root>\Temp` folder.

### About setting up Changepoint websites for SSL

If Changepoint websites are set up for SSL in Changepoint Administration, then changes are needed in the Web.config files for Changepoint.

If you plan to install SSO, these changes are made when you run the PowerShell script for your chosen SSO endpoint type.



To use SSL with application authentication, follow the instructions in "About application authentication" on page 140.

## Enabling HTTP Compression

It is recommended that you enable both static and dynamic compression.

**Note:** You must be a member of the `Administrators` group on the local computer to run scripts and executables. As a security best practice, log onto your computer using an account that is not in the `Administrators` group, and then use the `runas` command to run your script or executable as an administrator. The script assumes that `inetpub\Admascripts` is located on the system drive. The script performs an IIS reset when the configuration is complete.

1. In IIS Manager, on the **Compression** page, select:

- **Enable dynamic content compression**
- **Enable static content compression**

2. Restart IIS.

3. At a command prompt, run:

```
Changepoint\Utilities\HTTP Compression Utility\HTTPCompressionConfigIIS.bat
```

If you receive the following error message when you run the `.bat` file, you can safely ignore it:

```
ERROR ( message:New scheme object missing required attributes. Cannot add  
duplicate collection entry of type 'scheme' with unique key attribute  
'name' set to 'deflate'. )
```

### Tech Notes and Knowledge Base Articles

Search the Microsoft TechNet articles for more information on enabling HTTP compression.

## Setting Global IIS Parameters

Use IIS Manager to do the following for each Changepoint website:

1. On the **Connections** panel, select the website.
2. Double-click the ASP feature.
3. Expand **Limit Properties**.
  - a. Set the value of the **Maximum Requesting Entity Body Limit** to **10000000**

- b. Set the value of the **Response Buffering Limit** to **10000000**
4. In the **Actions** panel, click **Apply**.
5. Restart IIS.

### Configuring IIS to allow plug-in and expense template downloads

To allow users to download .exe plug-ins from Changepoint Preferences, you must configure the appropriate permissions in IIS.

If you have added .exe files to the **deny** list on your IIS server, then in the **URL** tab of the Request Filter Module add the following URLs:

```
/ChangepointMSP.exe  
/ChangepointOutlookSetup.exe
```

To allow users to download the expense template, add the following URL:

```
/ChangepointExcelExpenses.exe
```

### Importing licences for a new installation

Use Changepoint Administration to import the licenses for granting users access to Changepoint. You need a user license file for each database instance.

**Note:** You must configure the login settings for Changepoint Administration before you can import licenses.

1. Open Changepoint Administration.
2. To sign into Changepoint Administration for the first time, use `cpadmin` for both the user ID and password.

If Changepoint is not registered, the **Import Licenses** dialog appears.

3. Click **Choose File** to locate and open the Changepoint license file (\*.lic).
4. Click **Import**.

The **License Management** view displays the license file information.

5. Click **Close**.

For more information about licensing, see the *Changepoint Administration Guide*.

## 5. Installing Changepoint Windows Services

---

### Installing a Changepoint Windows service

The Changepoint Windows services require access to the database server, but do not have to be installed on the same server as the database or websites.

For information about installing and configuring a specific Changepoint Windows service, see the topic for the service.

**Warning:** If you change the default installation path, then you must install all services in a separate folder and not in the `<cp_root>` folder.

1. Do one of the following:
  - From the Changepoint installer, click the **Services** tab and click the `<servicename>` **Service** link.
  - Run the service installation program from the product media:

`\Changepoint\Services\<installation program name>`

2. Follow the prompts until the installation completes.
3. Configure the database connection settings for the service.

For more information, see "About configuring database connection settings" on page 65.

4. If necessary, edit the service configuration file to configure the service. The service configuration file, by default, is located in the installation directory.

**Note:** This is the same file that you edit to configure the SQL connection settings for the service in step 3.

5. Start the service.

### Uninstalling a Changepoint Windows Service

Use the Windows Control Panel to uninstall the service.

### Changepoint Email Notification service

The Changepoint Email Notification service queues messages for the Changepoint Mail service.

If you enable any email notifications in Changepoint Administration, you must install the Changepoint Email Notification service and the Changepoint Mail service, and make sure that these services run at suitable intervals. If these services do not run often enough, the EmailAuditStaging, EmailAuditNotification, and EmailQueue tables in the Changepoint database can grow very large.

If you do not enable email notifications, then it is sufficient to install and run only the Changepoint Mail Service. If in doubt, install and run both services.

### Installation information

Use the following information with the generic procedure for installing and configuring a Changepoint Windows service:

Information needed	Notes
Installation Program name	Changepoint Email Notification Service Installer.exe
Installation path	Default: <cp_root>\Changepoint Email Notification Service\
Configuration file	CPEmailNotification.exe.config
<b>Configuration settings</b>	
SendInterval	How often (in minutes) the service sends notifications. Default value: 5 Recommended value: 5 or greater

## Changepoint Exchange Synchronization Service

The Changepoint Exchange Synchronization service synchronizes Microsoft Exchange Server calendar entries with Changepoint calendars. Only the primary email account associated with each Exchange account can be synchronized with Changepoint

It is recommended that you install the service on the Changepoint Web Server. However, the service can be installed on any server that has network access both to the Changepoint database server and the server that runs Exchange Web Services. Both Microsoft Exchange on premise and Office 365 are supported. For more details, see the *Changepoint Product Architecture and Technology Matrix*.

**Note:** Before installing the Changepoint Exchange Synchronization service, you must create user accounts for Exchange and for the service. After installing the service, you must configure the Microsoft Exchange Server Autodiscover service.

## Create a domain user account for Exchange

Create a domain user account to be used within Exchange to impersonate users.

### For a Microsoft Office 365 installation

1. Log in to admin.microsoft.com.
2. Navigate to Users\Active Users.
3. Select "Add a user". This account does not require a mailbox. For example:

CpExSyncService (UPN = CpExSyncService@example.domain.com)

4. Navigate to the Exchange admin center.
5. In the left pane, select **permissions**.
6. In the center pane menu, select **admin roles**.
7. Create a new **Role Group** as follows:
  - Name = Changepoint Exchange Synchronization Service
  - Write scope: Default
  - Roles: ApplicationImpersonation
  - Members: Add the user created earlier (CpExSyncService).

### For a Microsoft Exchange installation

1. Using the AD/Exchange admin console, create a domain user account. This account does not require a mailbox. For example:

CpExSyncService (UPN = CpExSyncService@example.domain.com)

2. In the Exchange admin console permissions tab, create a new admin role with the following details:
  - Name: Changepoint Exchange Synchronization Service
  - Roles: ApplicationImpersonation

- **Members:** The domain user account that you just created (CpExSyncService)

If you prefer to use PowerShell, you can issue the following statement:

```
New-ManagementRoleAssignment -Name:ChangepointService -  
Role:ApplicationImpersonation -  
User:'CpExSyncService'
```

### Create a user account for the Changepoint Exchange Synchronization Service

1. On the machine that will run the Changepoint Exchange Synchronization Service, create a user account for the service. Ensure that the user account has the “Log on as service” right.

**Note:** You will require this user account and password to install the Changepoint Exchange Synchronization service.

2. Log in to the machine using the user account that you just created.
3. Create a generic Windows credential for the service:
  - a. In the **Windows Control Panel**, open the **Credential Manager** and select **Windows Credentials**.
  - b. Click **Add a generic credential**.
    - Internet or network address: Changepoint Exchange Synchronization Service
    - User name: The UPN of the domain user account that was created for Exchange impersonation, for example: CpExSyncService@example.domain.com.
    - Password: Password for the domain user account.
  - c. Click **OK** to save the credential.

**Note:** If you change the service login account, you must also create a new generic credential for the login.

### Information required to install the Changepoint Exchange Synchronization Service

Use the following information with the generic procedure for installing and configuring a Changepoint Windows service.

Information needed	Notes
Installation Program name	Exchange Synchronization Service.exe
Installation path	<b>Default:</b> <cp_root>\Changepoint Exchange Synchronization Service\
Configuration file	CPSynchronizationService.exe.config
User account and password for the service	User account and password for the Changepoint Exchange Synchronization Service.
<b>Configuration settings</b>	
SynchSchedule	Interval in minutes for synchronizing between Changepoint and Exchange. Default: 15
NewUserHistory	Number of days from the current date to go back when synchronizing new users. Default: 5
SynchronizationDirection	0 – synchronization is bidirectional 1 – synchronization is unidirectional from Changepoint to Exchange 2 – synchronization is unidirectional from Exchange to Changepoint. Default: 0
PurgeAutodiscoveryCache	Number of days to retain cache values before rediscovering resource CAS server settings. Default: 1
RetryAutodiscovery Failures	0 – the Autodiscovery cache is filled once, and failed CAS server lookups are ignored until the next time the Autodiscovery cache is replenished 1 – failed Autodiscovery CAS server lookups are re-evaluated each time the synchronization is executed Default: 0

Information needed	Notes
ConflictResolutionMethod	<p>For bidirectional synchronization, defines which modification is accepted when a calendar entry has been edited in both Changepoint and Exchange.</p> <p>E – the Changepoint modification is ignored and the Exchange modification is applied</p> <p>C – the Exchange modification is ignored and the Changepoint modification is applied</p> <p>N – the earlier modification is ignored and the later modification is applied.</p> <p>Default: N</p> <p><b>Note:</b> The setting does not apply to unidirectional synchronization.</p> <p>If a conflict occurs between a deletion and an update, the deletion is applied regardless of the setting.</p>
LogInformativeEvents	<p>0 – informative messages are not logged to the event log</p> <p>1 – informative messages are logged to the event log</p> <p>Default: 1</p>
EnableScpLookup	<p>true – performs SCP lookup during autodiscovery</p> <p>false – bypasses SCP lookup during autodiscovery</p> <p>Default: true</p>
ForcePersistenceInTarget	<p>0 – the target system in a unidirectional synchronization is overwritten by the source when changes occur in the target</p> <p>1 – the target system in a unidirectional synchronization is not overwritten by the source when changes occur in the target</p> <p>Default: 0</p>
MaxOccurrencesToSyncWhenNoEndDateSpecified	<p>Maximum number of recurring appointments going to Changepoint from Outlook on the Exchange synchronization.</p> <p>Default: 50</p>



## Configuring the Microsoft Exchange Autodiscover Service

The Changepoint Exchange Synchronization service depends on the Microsoft Exchange Server Autodiscover service. The Autodiscover service provides the Exchange Web Services URL for each user that is being synchronized.

Ensure that the Autodiscover service can be accessed by the user running the Changepoint Exchange Synchronization service. By default, communications to the Autodiscover service use SSL. The SSL certificate must be valid for the Autodiscover service.

Connections to the Autodiscover service are attempted in the following order:

1. Autodiscover service URLs found within the Active Directory (AD) Service Connection Point (SCP)
2. `https://<smtp-address-domain>/autodiscover/autodiscover.xml`
3. `https://autodiscover.<smtp-address-domain>/autodiscover/autodiscover.xml`

## Changepoint Mail Service

The Changepoint Mail service sends automated emails from Changepoint. You can install the service on any machine that has access to the SQL Server where the Changepoint database is hosted. The service also requires access to an SMTP server, either locally or through the network in order to relay mail.

If you are upgrading the Changepoint Mail Service, you must uninstall the old service first, and then install the new service.

**Note:** If you enable email notifications in Changepoint Administration, you must install the Changepoint Mail service and the Changepoint Email Notification service, and make sure that these services run at suitable intervals. If these services do not run often enough, the EmailAuditStaging, EmailAuditNotification, and EmailQueue tables in the Changepoint database can grow very large.

If you do not enable email notifications, then it is sufficient to install and run only the Changepoint Mail Service.

### Error messages

The Changepoint Mail service removes badly formed email addresses from the To, Cc, and Bcc lines of the emails, and logs them in the Changepoint Mail service server as:

```
Unable to send email to malformed email address: address
```

See the Event Viewer, **Applications and Services Logs > Changepoint**.

### Installation information

Use the following information with the generic procedure for installing and configuring a Changepoint Windows service.

Information needed	Notes
Installation Program name	Changepoint Mail Service Installer.exe
Installation path	Default: <cp_root>\Changepoint Mail Service\
Configuration file	CPMail.exe.config
<b>Configuration settings</b>	
SmtpServer	IP address or fully qualified domain name of the SMTP server that the Changepoint Mail service uses. Default: 127.0.0.1 Ensure that the SMTP server allows mail to be relayed from the machine on which the Changepoint Mail service is hosted. <b>Note:</b> If virus protection is enabled on the server that hosts the Changepoint Mail service, consider adding a scanning exception for the Changepoint Mail service to prevent it from being falsely detected as a mass mailing worm.
SmtpPort	The port used to contact the SMTP server. Default: 25
FromAddress	Default <i>from</i> address to use when a <i>from</i> address is not supplied when the mail is queued. Default: username@domain.com
FromAddressDisplayName	Default name to display in the email's <i>from</i> address when a <i>from</i> address is not supplied when the mail is queued. Default: username
SendInterval	How often (in minutes) the service sends new notifications. Default value: 5 Recommended value: 5 or greater

## Changepoint Report Prerender Service

The Changepoint Report Prerender service is used with the Changepoint Report Scheduler service. It is responsible for advanced delivery option management and report object rendering of group and cross-tab tables.

The Changepoint Report Prerender service can be installed on any server that has access to the SQL Server where the Changepoint database is hosted. The service requires the following access:

- HTTP access to the URL configured in the Report Prerender service in the server integration page in Changepoint Administration (**General Setup > Server Integration**).
- Access to a Changepoint website that is configured with application authentication. If the Changepoint website is set up for Windows integrated authentication, see "Using both application authentication and SSO" on page 140.

**Note:** The service is incompatible with Enhanced session management, which is the option that restricts authenticated users to one active session per browser container.

### Installation information

Use the following information with the generic procedure for installing and configuring a Changepoint Windows service.

Information needed	Notes
Installation Program name	Report Prerender Service Installer.exe
Installation path	Default: <cp_root>\Changepoint Report Prerender Service\
Configuration file	ReportPrerenderService.exe.config
<b>Configuration settings</b>	
CompanyProfile	Identifies whether to use PPM or PSA terminology. Valid values are ITD (PPM) and PSO (PSA).

Information needed	Notes
AccessCheck	When set to <code>true</code> , access checks are done before a report is generated, but resources can design reports that bypasses security if they have the required permissions. When set to <code>false</code> , access checks are not done. The default setting is <code>True</code> .
CommandTimeout	Number of seconds that the service queries the database for a call before timing out. The default is 600 seconds.
ReportTimeout	Number of minutes that a report takes to be generated before it times out. The default is 30 minutes.
MaxReportThread	Number of reports that can be generated concurrently. The default value is 5. The highest number of reports that can be processed concurrently is 25.

### Configuring the Report Prerender Service

You must configure the server where the Report Prerender Service is installed.

1. Disable the Internet Explorer enhanced security configuration.

Use the **Server Manager** to turn off **Configure IE ESC** for both Users and Administrators.

2. Enable the submission of non-encrypted form data.

For both **Computer Configuration** and **User Configuration**, use the **Group Policy Object Editor** to enable **Submit non-encrypted form data** in the Internet Explorer **Administrative Templates**

3. Assign the Changepoint site to the local intranet zone.

For both **Computer Configuration** and **User Configuration**:

- a. Use the **Group Policy Object Editor** to add the Report Prerender Service URL to the computer's Intranet zone.
- b. If the server implements SSL, use the **Group Policy Object Editor** to enable the setting **Do not prompt for client certificate selection when no certificates or only one certificate exists**.

4. To use SSL with the Report Prerender website:

- a. Set the Report Prerender Service to **Log On As Administrator**.
  - b. In Internet Explorer **Tools > Options > Advanced**, clear the Security option to **Check for server certificate revocation**.
  - c. Edit `\Windows\System32\drivers\etc\hosts` to map the IP address of the website to the URL.
5. Sign in to Changepoint Administration:
  - a. Disable enhanced session management (**General > Session Security**).
  - b. Set up the Report Prerender Service URL (**General > Server Integration**).
6. Restart the server.

### Upgrading Internet Explorer on the server

When the Report Prerender Service is installed, a value is written in the Windows registry according to the version of Internet Explorer installed on the server:

- Internet Explorer 11: Value = 9000
- You can modify the registry key value when applicable

```
Entry: HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Internet
Explorer\MAIN\FeatureControl\FEATURE_BROWSER_EMULATION
Name: ReportPrerenderService.exe
Value: 9000
```

Entry on 64-bit OS is:

```
HKEY_LOCAL_MACHINE\SOFTWARE\Wow6432Node\Microsoft\Internet
Explorer\Main\FeatureControl\FEATURE_BROWSER_EMULATION Value: 9000
```

## Changepoint Report Scheduler Service

The Changepoint Report Scheduler Service is a Windows Service that queries the Changepoint database to locate scheduled reports that require processing. It can be installed on any server that has access to the Changepoint database server.

### Installation information

Use the following information with the generic procedure for installing and configuring a Changepoint Windows service:

Information needed	Notes
Installation Program name	Report Scheduler Service Installer.exe
Installation path	Default: <cp_root>\Changepoint Report Scheduler Service\
Configuration file	ReportSchedulerService.exe.config
<b>Configuration settings</b>	
CompanyProfile	Determines whether the installation uses PPM terminology or PSA terminology. Valid values are ITD (PPM) and PSO (PSA).
AccessCheck	Determines whether an access check is required before a report is generated. When True, access checks are done, but a resource can design a report that bypasses security if they have the required permissions. When False, access checks are not done. The default setting is True.
CommandTimeout	Determines the maximum amount of time the service can take to query the database for a call before timing out. The default is 600 seconds.
ReportTimeout	Number of minutes a report can take to generate before it times out. The default is 30 minutes.
MaxReportThread	Maximum number of reports that can be generated concurrently. The default value is 5. The highest possible value is 25.




### Using the Report Scheduler Service Controller

1. Click **Start** and select **Programs > Changepoint > Changepoint**.
2. Click **Report Scheduler Service Controller**.

The Report Scheduler Service Controller icon is added to the task bar. The service is stopped.

- To start the service, right-click the stopped  icon on the task bar and select **Start**.

The service runs in the background.

- To pause the service, right-click the started  icon and select **Pause**.
- To resume after pausing, right-click the paused  icon and select **Continue**.
- To stop the service, right-click the started  icon and select **Stop**.
- To check the product version number, right-click the icon and select **About**.

## Managing Changepoint Windows Services

You manage the Changepoint Windows Services the same way as other Windows services.

To start, stop, and set the startup type for services, use the **Administrative Tools > Component Services** in the Windows Control Panel.





## 6. Configuring Database Connection Settings

---

### About configuring database connection settings

To access the database, each Changepoint application requires an encrypted connection string, which is stored in a configuration file. To encrypt the database connection settings, you use the Login Settings utility.

The default path to the utility is:

```
<cp_common>\LoginSettings\Login Settings.exe
```

#### Default user ID and password

The configuration files that contain the connection strings are password protected. By default, the user ID is `USERID` and the password is `PASSWORD` (case-sensitive) in all of the configuration files.

The first time that you access a configuration file using the Login Settings utility, you must use the default user ID and password. You then specify the user ID and password that are used for database access, as described in "Required accounts and permissions" on page 15. The login settings utility encrypts these values and updates the configuration file with the encrypted values.

### Configuring database connection settings

These are the general instructions for using the Login Settings utility. For more information, see the database connection settings topic for the application.

1. Run:

```
<cp_common>\LoginSettings\Login Settings.exe
```

The **Changepoint Connection Settings** dialog box appears.

2. From the **Connection Settings** list, select the application.
3. In the **File Location** field, browse to the configuration file for the application.
4. Enter the user ID and password of the account for database access, then click **OK**.

**Note:** The first time you run the Login settings utility on a configuration file, use “USERID” and “PASSWORD” (case sensitive) for the User ID and Password.

5. In the **Connection Settings** section, specify the server name, database name, and time-out information to be used in the connection string.

Time-out is optional and can be left blank, or can be used to specify the ADO connection.timeout value (in seconds) used in the connection string.

The .asp implementations use the time-out values specified in the **Connection Settings** dialog. The .NET implementations (.aspx) use the CommandTimeout setting value specified in the application Web.config file instead.

6. In the **User ID** and **Password** fields, enter the user ID and password for the SQL account for accessing the Changepoint database.
7. To verify the connection string, click **Test**.
8. Click **Save**.

### Database connection settings for Batch Print

Field	Notes
Connection Settings	Changepoint Windows Services, Scheduled Jobs and Utilities
File location	Default: <cp_root>\BatchPrint\PrintInvoices.exe.config
User ID (for file)	Initial Default: USERID
Password (for file)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

### Database connection settings for Changepoint

The Changepoint option updates the DSN, DataDSN, and DSN2 information in the Global.asa and Web.config files in the Changepoint folder. You only have to select the Global.asa file because the Web.config file inherits the same values that you input.

**Note:** To render reports in Changepoint, you must also configure the Changepoint Report Server. If your organization has a separate reporting database, then specify its server name and database name for the **Changepoint Report Server** settings; otherwise, use the same server name and database that you entered for Changepoint.

Field	Notes
Connection Settings	Enterprise
File location	Default: <cp_root>\Enterprise\Global.asa
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

Field	Notes
Connection Settings	Enterprise Report Server
File location	Default: <cp_root>\Enterprise\Global.asa
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	Server for the separate reporting database, if used. Otherwise, the name of the main Changepoint database server.

## 6. Configuring Database Connection Settings

---

Field	Notes
Database	Name of the separate reporting database, if used. Otherwise, the name of the main Changepoint database.
Time Out	Time Out for the separate reporting database, if used.
User ID (for database access)	User ID for the separate reporting database, if used.
Password (for database access)	Password for the separate reporting database, if used.

### Database connection settings for Changepoint Email Notification Service

Field	Notes
Connection Settings	Changepoint Windows Services, Scheduled Jobs and Utilities
File location	Default: <cp_root>\Changepoint Email Notification Service \CPEmailNotification.exe.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

## Database connection settings for Changepoint Exchange Synchronization Service

Field	Notes
Connection Settings	Changepoint Windows Services, Scheduled Jobs and Utilities
File location	Default: <cp_root>\Changepoint Exchange Synchronization Service \CPSynchronizationService.exe.config
User ID (for file)	Initial Default: USERID
Password (for file)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

## Database connection settings for Changepoint Export Publishing Service

Field	Notes
Connection Settings	Changepoint Windows Services, Scheduled Jobs and Utilities
File location	Default: <cp_root>\Changepoint Export Publishing Service \CPExportPublishingService.exe.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	

Field	Notes
User ID (for database access)	
Password (for database access)	

### Database connection settings for Changepoint Mail Windows Service

Field	Notes
Connection Settings	Changepoint Windows Services, Scheduled Jobs and Utilities
File location	Default: <cp_root>\Changepoint Mail Windows Service CPMail.exe.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

### Database connection settings for Changepoint Report Prerender Service

You must configure the connection settings for the Changepoint Report Prerender Service and for the Reports DSN information for the Report Designer Report Server, even if you are not deploying a separate report server.

If your organization has a separate reporting database, then specify its server name and database name for the **Report Designer Report Server** settings. Otherwise, use the same server name and database that you entered for **Changepoint Windows Services, Scheduled Jobs and Utilities**.

Field	Notes
Connection Settings	Changepoint Windows Services, Scheduled Jobs and Utilities
File location	Default: <cp_root>\Changepoint Report Prerender Service \ReportPrerenderService.exe.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

## Database connection settings for Changepoint Report Scheduler Service

You must configure the connection settings for the Changepoint Report Scheduler Service and for the Reports DSN information, even if you are not deploying a separate report server.

If your organization has a separate reporting database, then specify its server name and database name for the **Report Designer Report Server** settings. Otherwise, use the same server name and database that you entered for **Changepoint Windows Services, Scheduled Jobs and Utilities**.

Field	Notes
Connection Settings	Changepoint Windows Services, Scheduled Jobs and Utilities
File location	Default: <cp_root>\Changepoint Report Scheduler Service \ReportSchedulerService.exe.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD

## 6. Configuring Database Connection Settings

---

Field	Notes
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

Field	Notes
Connection Settings	Report Designer Report Server
File location	Default: <cp_root>\Changepoint Report Scheduler Service \ReportSchedulerService.exe.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	Server for the separate reporting database, if used. Otherwise, the name of the main Changepoint database server.
Database	Name of the separate reporting database, if used. Otherwise, the name of the main Changepoint database.
Time Out	Time Out for the separate reporting database, if used.
User ID (for database access)	User ID for the separate reporting database, if used.
Password (for database access)	Password for the separate reporting database, if used.



## Database connection settings for Changepoint Report Server

Field	Notes
Connection Settings	Enterprise Report Server
File location	Default: <cp_root>\Enterprise\Global.asa
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	Server for the separate reporting database, if used. Otherwise, the name of the Changepoint database server.
Database	Name of the separate reporting database, if used. Otherwise, the name of the Changepoint database.
Time Out	Time Out for the separate reporting database, if used.
User ID (for database access)	User ID for the separate reporting database, if used.
Password (for database access)	Password for the separate reporting database, if used.

## Database connection settings for Cognos Client Tools

Field	Notes
Connection Settings	Changepoint Windows Services, Scheduled Jobs and Utilitiesr
File location	Default: <cp_root>\Cognos\CognosClientTools.exe.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	

## 6. Configuring Database Connection Settings

---

Field	Notes
User ID (for database access)	
Password (for database access)	

### Database connection settings for Data Archiving Source SQL server

Field	Notes
Connection Settings	Data Archiving (Source SQL Server)
File location	Default: C:\Program Files\Changepoint\Changepoint\Data Archiving\Data Archiving.ini
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

### Database connection settings for Data Archiving Target SQL server

Field	Notes
Connection Settings	Data Archiving (Target SQL Server)
File location	Default: C:\Program Files\Changepoint\Changepoint\Data Archiving\Data Archiving.ini
User ID (for File)	Initial Default: USERID

Field	Notes
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

## Database connection settings for Infiniti Launch

Field	Notes
Connection Settings	Infiniti Launch
File location	<cp_root>Intelligent Forms\Websites\InfinitiLaunch\Web.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	Infiniti Server value
Database	InfinitiDB value
Time Out	
User ID (for database access)	User ID that has dbo access to the InfinitiDB.
Password (for database access)	Password of User ID that has dbo access to the InfinitiDB.
Changepoint Web Services URL	http://{WSAPIServer:port}/CPWebService/VerifyUser.asmx
Infiniti URL	http://{InfinitiServer:port}/Infiniti/produce/service/platform.asmx

## Database connection settings for Infiniti Scheduler

Field	Notes
Connection Settings	Infiniti Scheduler
File location	<cp_root>Intelligent Forms\ IntelledoxScheduler\ IntelledoxScheduler.exe.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	Infiniti Server value
Database	InfinitiDB value
Time Out	
User ID (for database access)	User ID that has dbo access to the InfinitiDB
Password (for database access)	Password of User ID that has dbo access to the InfinitiDB

## Database connection settings for Intelligent Forms

You use the Login settings utility to update the settings for an Intelligent Forms instance or to configure an additional Intelligent Forms instance for example, a test instance.

1. Run: <cp\_common>\LoginSettings\Login Settings.exe.
2. In the **Connection Strings** field, select **Intelligent Forms Database Setup**.

### Intelligent Forms Setup dialog box options

Field	Notes
New Database Server	Server that hosts the new Changepoint database and Infiniti database.
New Changepoint Database	Name of the new Changepoint database.

Field	Notes
New Changepoint User ID	User ID for the new Changepoint database.
New Changepoint Password	Password for the new Changepoint database.
Infiniti Database	Name of the Infiniti database.
Infiniti User ID	User ID for the new Infiniti database.
Infiniti Password	Password for the new Infiniti database.
Old Changepoint API URL	URL for the previous Changepoint API.
New Changepoint API URL	URL for the new Changepoint API.
Old Database Server	Server that hosted the previous Changepoint database.
Old Changepoint Database	Name of the previous Changepoint database.
Old Changepoint User ID	SQL account for accessing the Changepoint database.
Old Changepoint Password	Password for the SQL account.
Old Infiniti URL	URL for the previous Infiniti instance.
New Infiniti URL	URL for the new Infiniti instance.

## Database connection settings for Intelligent Forms (Changepoint Data Services, Manage, and Produce)

**Note:** You must configure the database connection settings for each of the Web.config files, that is for Changeponit Data Services, Manage, and Produce.

Field	Notes
Connection Settings	Intelligent Forms (Changepoint Data Services, Manage, and Produce)
File location	<code>&lt;cp_root&gt;\Enterprise\Intelligent Forms\  ChangepointDataService\Web.config  &lt;cp_root&gt;\Enterprise\Intelligent Forms\Manage\Web.config  &lt;cp_root&gt;\Enterprise\Intelligent Forms\Produce\Web.config</code>

## 6. Configuring Database Connection Settings

---

Field	Notes
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	Infiniti Server value
Database	InfinitiDB value
Time Out	
User ID (for database access)	User ID that has dbo access to the InfinitiDB
Password (for database access)	Password of User ID that has dbo access to the InfinitiDB

### Database connection settings for Report Designer

You must configure the settings for both Report Designer and the Report Designer Report Server, even if you are not deploying a report server.

If your organization has a separate reporting database, then specify its server name and database name for the *Report Designer Report Server* settings; otherwise, use the same server name and database name that you entered for Report Designer.

Field	Notes
Connection Settings	Report Designer, Web Services
File location	Default: <cp_root>\ReportDesigner\Web.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

Field	Notes
Connection Settings	Report Designer Report Server
File location	Default: <cp_root>\ReportDesigner\Web.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	Server for the separate reporting database, if used. Otherwise, the name of the main Changepoint database server.
Database	Name of the separate reporting database, if used. Otherwise, the name of the main Changepoint database.
Time Out	Time Out for the separate reporting database, if used.
User ID (for database access)	User ID for the separate reporting database, if used.
Password (for database access)	Password for the separate reporting database, if used.

## Database connection settings for RESTful API

Field	Notes
Connection Settings	RESTful API
File location	<cp_root>\Enterprise\WebAPI\Web.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	

## 6. Configuring Database Connection Settings

---

Field	Notes
User ID (for database access)	
Password (for database access)	

### Database connection settings for CPEffectiveDates scheduled job

Field	Notes
Connection Settings	Changepoint Windows Services, Scheduled Job, and Utilities
File location	Default: <cp_root>\ScheduledJobs\ CPEffectiveDates.exe.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

### Database connection settings for Release Guest Licenses scheduled job

Field	Notes
Connection Settings	Changepoint Windows Services, Scheduled Job, and Utilities
File location	Default: <cp_root>\ScheduledJobs\CPGuestLicenses.exe.config
User ID (for File)	Initial Default: USERID



Field	Notes
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

## Database connection settings for Transport Tool

Field	Notes
Connection Settings	Transport Tool
File location	Default: <cp_root>\Enterprise\web.config
User ID (for file)	Initial Default: USERID
Password (for file)	Initial Default: PASSWORD
Server	Server that CPTransport database it installed on.
Database	CPTransport
Time Out	
User ID (for database access)	User ID that has dbo access to CPTransport Database
Password (for database access)	Password of User ID that has dbo access to CPTransport Database

### Database connection settings for Web Services API

Field	Notes
Connection Settings	Report Designer, Web Services
File location	Default: <cp_root>\API\CP Web Services\web.config
User ID (for file)	Initial Default: USERID
Password (for file)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

### Database connection settings for Web Sockets

Field	Notes
Connection Settings	WebSockets
File location	<cp_root>\Enterprise\WebSockets\Web.config
User ID (for File)	Initial Default: USERID
Password (for File)	Initial Default: PASSWORD
Server	
Database	
Time Out	
User ID (for database access)	
Password (for database access)	

## 7. Configuring Changepoint Scheduled Jobs

---

### About Changepoint scheduled jobs

Changepoint scheduled jobs run at various intervals to ensure that data is refreshed and up-to-date. Some of the scheduled jobs run individually and independently. Others have dependencies and are run as part of a sequence of scheduled jobs.

#### Chained scheduled jobs

Some scheduled jobs have dependencies on other scheduled jobs, and for this reason, a scheduling chain has been set up for these jobs.

The steps in the chain are:

1. Update Time Rate job
  - By default, the Update Time Rate job starts at 12.01 AM.
  - When it completes, whether it failed or succeeded, the Update Time Rate job starts the Resource Demand Calculation job.
2. Resource Demand Calculation job
  - If the Resource Demand Calculation job fails, none of the remaining jobs in the chain is started.
  - If the Resource Demand Calculation job succeeds, it starts the Financial Analysis Summary job.
3. Financial Analysis Summary job
  - Whether the Financial Analysis Summary job succeeds or fails, it starts the Calculate Project Costs and Portfolio Calculation Engine jobs (these jobs run in parallel).
4. Calculate Project Costs job
5. Portfolio Calculation Engine job
6. Populate Demand and Capacity job

#### Reasons for the Dependencies

All the jobs in step 2–step 5 of the chain have dependencies on step 1, which is the Update Time Rate job. The Resource Demand Calculation job runs upon completion of the Update

Time Rate job regardless of the pass/fail status of the Update Time Rate job.

Do not alter the sequence of jobs in the chain, because:

- The Update Time Rate jobs needs to run and finish successfully before the Financial Analysis Summary job starts to ensure that the most recent data from the Time table is retrieved and costs are updated in FinAnnSummary table.
- The Update Time Rate job needs to run and finish successfully before the Resource Demand Calculation job starts to ensure that a portfolio can retrieve the most recent data from the Time tables.
- Until the Update Time Rate job has finished running, no data is available for display in the portfolio for cost metrics.
- Bad data can cause some of the steps in the Portfolio Calculation Engine job to fail; however, it may not be necessary to fail the entire job. Go through the job history and Windows EventLog for more details.


### Running the Update Time Rate job more frequently

To run the Update Time Rate job more frequently than once a day without initiating the chained scheduled jobs, create another scheduled job (for example, Update Time Rate Hourly) that does not launch the Resource Demand Calculation job. Schedule the new job to run at the chosen interval, but leave a gap when the chain of scheduled jobs is running.

For example, to run Update Time Rate Schedule every hour throughout the day, if:

- Update Time Rate is scheduled for 12:01AM, its default start time, and
- your job history tells you that the average time taken by the chained jobs is 4 hours, and that Update Time Rate takes, on average, 30 minutes

set the schedule for Update Time Rate Hourly to hourly, starting at 5:00 AM and ending at 11:00 PM.

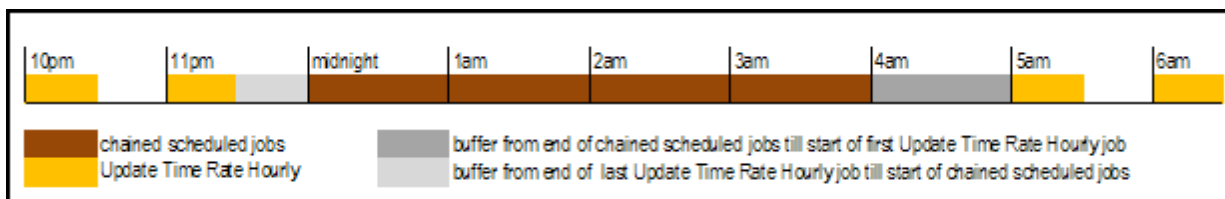

This leaves a gap of 5 hours (4 hours for the chained jobs, plus an hour of a buffer) from the time that the chained jobs start until the first run of Update Time Rate Hourly job.

It also allows a buffer of 30 minutes from the end of the last run of Update Time Rate Hourly until the chained jobs start.

## Scheduled Jobs reference list

The following table lists the scheduled jobs that are included with Changepoint. The times and frequencies listed are the default settings. The statuses (enabled or disabled) are the recommended settings. For a new installation, all scheduled jobs are disabled. For an upgrade, the existing status of each job is maintained.

Review and reschedule the jobs as required according to the needs of your organization.

The names of the scheduled jobs that appear in SQL Server Manager are prepended by the database name and an underscore, for example “Changepoint\_Adjust Daylight Savings”.

### Adjust Daylight Saving scheduled job

Sets a flag in the time zone table to indicate which time zones are currently observing daylight savings time.

<b>File or Stored Procedure</b>	AdjustDaylightSaving
<b>Schedule</b>	Daily at 3:01 AM
<b>Status</b>	Enabled

### Archive Aged Entities scheduled job

Validates all relevant entities (including those previously validated by the Archive Validation job), archives them into the archive database, then removes them from the Changepoint database.

Before running the job for the first time, create an empty archive database on the target server. The .dtsx file must exist on the source server; it is not required on the target archive server.

<b>File or Stored Procedure</b>	ARC_ValidateProjectRequests ARC_ValidateProjects ARC_ValidateEngagement ARC_ValidateFinalization C:\Program Files\Changepoint\Changepoint\Data Archiving\Data Archiving.dtsx
<b>Schedule</b>	Not scheduled
<b>Status</b>	Enabled

### Archive Validation scheduled job

Validates entities to be archived and generates archive validation logs.

<b>File or Stored Procedure</b>	ARC_ValidateProjectRequests ARC_ValidateProjects ARC_ValidateEngagement ARC_ValidateFinalization
<b>Schedule</b>	Not scheduled
<b>Status</b>	Enabled

### Auto Dispatch Request to Queues scheduled job

For request types for which queues have been configured, sends qualifying requests to queues.

<b>File or Stored Procedure</b>	AutoDispatch
<b>Schedule</b>	Every 5 minutes
<b>Status</b>	Enabled

### Auto Escalate Requests scheduled job

Escalates requests based on a Service Level Agreement.

---

<b>File or Stored Procedure</b>	AutoEscalate
<b>Schedule</b>	Every 30 minutes
<b>Status</b>	Enabled

### BatchCommitInvoices scheduled job

Commits batch invoices, which populates the necessary data for the Batch Invoice Process Report.

The batch invoice commit can also be done through the UI. Your organization's policies determine which method you use.

If you set up a schedule for this job, it is recommended that you set the job to run during off-peak hours and ensure that the job does not overlap other jobs.

<b>File or Stored Procedure</b>	BatchCommitInvoice
<b>Schedule</b>	Not scheduled
<b>Status</b>	Enabled

### BatchInvoicingGetInvoiceDefaultList scheduled job

Starts the batch invoice/cross charge generation process, using selections previously saved from the Batch Invoice/Cross Charge report.

<b>File or Stored Procedure</b>	BI_BatchGetInvoiceDefaultList
<b>Schedule</b>	Daily at 3:30 AM
<b>Status</b>	Enabled

### Calculate Project Costs scheduled job

Calculates budget, planned costs and actual costs at the project, task and task assignment levels. This job populates the ProjectCostInfo table that is used to generate the earned value data providers

**Note:** Do not set an independent schedule for this job. The Calculate Project Costs job is called by the Financial Analysis Summary job, and both are included in the chained scheduled jobs. For more information, see "Chained scheduled jobs" on page 83.

<b>File or Stored Procedure</b>	dbo.EVR_Calculate ProjectCosts
<b>Schedule</b>	Not scheduled
<b>Status</b>	Enabled

### CheckTimeToApprove scheduled job

Generates the **You have time to approve** email notification.

<b>File or Stored Procedure</b>	CheckTimeToApprove
<b>Schedule</b>	Daily at 5:00 AM
<b>Status</b>	Enabled

### CleanResourceAvailability scheduled job

Removes availability calendar entries that are more than (default) 30 days old. This job is optional, but recommended if your organization has a large number of availability entries. Removing the old entries helps to minimize table size.

To change the default number of days, edit the job step to pass the `@ndays` parameter to the stored procedure.

To change the value to *n* days, add the parameter as follows:

```
CleanResourceAvailability @ndays = n
```

The larger the number of days, the larger the database size.

For more information, see "Editing parameters for scheduled jobs " on page 102.

<b>File or Stored Procedure</b>	CleanResourceAvailability
<b>Schedule</b>	Daily at 12:00AM
<b>Status</b>	Disabled



## CPEffectivedates scheduled job

Activates effective dates for work history information about a resource.

You must encrypt the database connections settings for `CPEffectiveDates.exe`. For more information, see "About configuring database connection settings" on page 65.

`CPEffectiveDates.exe` uses both sets of server name and database name parameters (from the Login Settings utility and from the command line).

<b>File or Stored Procedure</b>	<code>&lt;cp_root&gt;\ScheduledJobs\ CPEffectiveDates.exe</code> <code>[DATABASETYPE], [DATABASESERVER], [DATABASE]</code> Where: <code>[DATABASETYPE]</code> – SQL <code>[DATABASESERVER]</code> – name of Changepoint database server <code>[DATABASE]</code> – name of Changepoint database
<b>Schedule</b>	Daily at 12:00:01 AM.
<b>Status</b>	Enabled

## CPExtended\_Compile stats and purge data scheduled job

Compiles statistics from Traces table in the CPExtended database, and purges old trace data. Default threshold is one month.

<b>File or Stored Procedure</b>	CompileStatsAndPurgeData
<b>Schedule</b>	Every Sunday at 2:00 AM
<b>Status</b>	Disabled

## CPFullText scheduled job

Populates the full text catalogs for both knowledge management and request items. Items that have been created since the previous job run cannot be located until after the subsequent job run.

**Note:** Enable either `CPFullText` or `CPFullText` using background updates, but not both.

<b>File or Stored Procedure</b>	sp_fulltext_catalog
<b>Schedule</b>	Daily at 12:15 AM.
<b>Status</b>	Enabled

### CPFullText using background updates scheduled job

Updates the catalog immediately using incremental updates. A full-text rebuild is performed weekly in case any of the incremental updates fails.

**Note:** Enable either CPFullText *or* CPFullText using background updates, but not both.

<b>File or Stored Procedure</b>	sp_fulltext_catalog
<b>Schedule</b>	Weekly on Sunday at 4:00 AM.
<b>Status</b>	Disabled

### CPTempDB\_Clean up idle-orphaned schemas scheduled job

Removes schema for low use schemas. By default, schemas that have not been accessed for 14 days will be removed. Schemas will not be removed when the schema owner is currently logged into Changepoint.

<b>File or Stored Procedure</b>	exec CPTempDBCleanupOrphanedSchemas 14
<b>Schedule</b>	Weekly on Sunday at 2:00 AM.
<b>Status</b>	Enabled

### Financial Analysis Summary scheduled job

Populates the tables used by the financial analysis data provider, for use in reporting and analysis.

Do not set a schedule for this job. The Financial Analysis Summary job is called by the Resource Demand Calculation job, and both are included in the chained scheduled jobs. For more information, see "Chained scheduled jobs" on page 83.

A step in the Financial Analysis Summary job detects if the Portfolio CalculationEngine job exists and is enabled. If not, it clears the portfolio recalculation table, which is normally processed and cleared by the portfolio job.

If you have re-named the portfolio calculation engine job, do one of the following:

- Re-enable it under the exact name "Portfolio Calculation Engine"
- Remove the step from the Financial Analysis Summary job to ensure the data is not truncated when portfolio information is being calculated.

**Note:** If you have multiple instances of the Financial Analysis Summary job and have renamed the jobs with unique names, remove the step.

<b>File or Stored Procedure</b>	FinAnnSummary_ToDate FinAnnSummary_ToDateTwo FinAnnSummary_Forecast FinAnnSummary_Unbillable RD_GetRDMonetaryData msdb..sp_start_job @job_name = 'Calculate Project Costs' msdb..sp_start_job @job_name = 'Portfolio Calculation Engine'
<b>Schedule</b>	Not scheduled
<b>Status</b>	Enabled

## IPM Calculation Engine scheduled job

The Copy Assignments step copies the metric assignments (if the carry forward option is selected) from the previous IPM period to the current period. This step runs only on the first day of the period.

The Calculate Raw Data step gathers data from the Changepoint database, generates raw data and inserts it into the MetricRawData table. This calculation gathers only data that is required since the last time the calculation ran. If the raw data is from a previous period (refdate), the system inserts a record into the IPIReCalcuLastPeriod table. From this table, the calculation engine can re-calculate the data from the end of the day for a previous period.

## 7. Configuring Changepoint Scheduled Jobs

---

In the Calculate Metric Data step, the IPM Calculation engine calculates raw data that is associated with a resource who is assigned to a metric. It inserts the results into the MetricData table. This calculation calculates only the raw data based on the current IPM period. The criteria are as follows:

- The resource is assigned to a metric and the assignment is not deleted
- The metric is not deleted
- The standard metric is not deleted
- The engine includes an IPM re-calculation step that re-calculates the last day of the previous period if metric data for the last period is detected.

The Clean up step clears the raw data tables of information that is no longer required.

<b>File or Stored Procedure</b>	IPI_periodcopy IPICalculationEngine IPI_ReCalcuLastPeriod IPI_deleteRawData
<b>Schedule</b>	Daily at 10:30 PM.
<b>Status</b>	Enabled

### Nonworking Days Task Assignments Email scheduled job

Generates and sends email notifications to the project manager and assigned resources when effort from task assignments is assigned to resources on nonworking days.

<b>File or Stored Procedure</b>	GenerateNonworkingDaysEmail.sql
<b>Schedule</b>	Every 15 minutes
<b>Status</b>	Enabled

### PercentOfContractIncurred scheduled job

Notifies the Engagement/Initiative Manager if:

- the invoiced/cross-charged amount is near the threshold (80% of the contract approved amount), or

- the contract approved amount has been exceeded.

Generates the email notifications for “ContractApproved amount near threshold” and “ContractApproved amount has been exceeded”.

<b>File or Stored Procedure</b>	PercentOfContractIncurred
<b>Schedule</b>	Weekly on Sunday at 7:00 PM
<b>Status</b>	Disabled

## PerformanceCPGrowth scheduled job

Monitors the growth of Changepoint database files and tables.

For more information, see "Monitoring database growth" on page 103.

<b>File or Stored Procedure</b>	PerformanceCollectAndCalculateDbGrowth
<b>Schedule</b>	Daily at 11:50 PM
<b>Status</b>	Enabled

## Populate Demand and Capacity scheduled job

Populates table tblDemandAndCapacity used by table Demand and Capacity data provider, for use in reporting and analysis.

<b>File or Stored Procedure</b>	PopulateDemandAndCapacity
<b>Schedule</b>	Daily at 2:00AM
<b>Status</b>	Enabled

## Portfolio Calculate Report Cards

Calculates customer/client report card information used by the customer/client report card and customer/client radar reports.

All data is stored in a table on the Changepoint database server, and is displayed when the report card is generated for a specific customer/client profile, or when the Customer/Client Radar report is run.

**Note:** Financial information is displayed in the user's home currency.

Because the job normalizes all of its financial calculations to the most common currency specified in the global workgroups, at least one global workgroup must have a currency selected.

If you use Survey Management, enable this job.

<b>File or Stored Procedure</b>	PF_CalculateReportCards
<b>Schedule</b>	Daily at 10:00 PM
<b>Status</b>	Disabled

### Portfolio Calculation Engine scheduled job

This job performs all the calculations required by portfolio management. The parameter in the second step determines whether the step runs: set to 0 or greater to run, less than 0 to skip.

Do not set a schedule for this job. The Portfolio Calculation Engine job is called by the Financial Analysis Summary job, and both are included in the chained scheduled jobs. For more information, see "Chained scheduled jobs" on page 83.

<b>File or Stored Procedure</b>	ProjectToSubProjects PF_AutomaticUpdate 1 PF_FiscalPeriodEndReCalc PF_ReCalcuLastPeriod PFRollupProjectNoBillingOffice PopulateProjectCost PF_BudgetvsActual PFRequestCost PFRequestEffort PFPlanningHoursEffort PFRemainingHoursCost PFPlanningHoursCost PFUninvoicedBillingAmount PFPlanningHoursBillingAmt PFRevRecAmount PFRequestBillingAmount PFRemaingBillingAmt PF_RecalcuLastPeriod_UsrEntr PF_CalculationEngine PFPortfolioSummary PF_Recalc_RollupPortfolios PFRollup_CalcEngine
<b>Schedule</b>	Not scheduled
<b>Status</b>	Enabled

## Process Expense Approval scheduled job

Processes expense approver records and updates the records with the approver and status in a table accessed by the standard Changepoint **You have expense reports to approve** notification.

If no engagement approver is defined, the expense record is updated with the line approver.

If no line approver is defined, this job automatically approves the record.

<b>File or Stored Procedure</b>	ProcessExpenseApproval
<b>Schedule</b>	Every 30 minutes
<b>Status</b>	Enabled

### Process Time Entries for Approval scheduled job

Processes time records pending approval, and stores the records in a table accessed by the standard Changepoint **You have time to approve** notification.

<b>File or Stored Procedure</b>	ProcessTimeApproverRecords
<b>Schedule</b>	Every 30 minutes
<b>Status</b>	Enabled

### Reindex and Update Statistics daily scheduled job

Calculate statistics for the indexes it updates in the Changepoint database for SQL Query Optimizer purposes.

<b>File or Stored Procedure</b>	(scripts) Daily Reindex Defrag Indexes Daily Update Statistics
<b>Schedule</b>	Daily at 6:00AM.
<b>Status</b>	Enabled

### Reindex and Update Statistics weekly scheduled job

Updates statistics for all rows in all tables in the Changepoint database for SQL Query Optimizer purposes.



<b>File or Stored Procedure</b>	(scripts) Weekly Reindex Weekly Update Statistics
<b>Schedule</b>	Weekly on Sunday at 3:00 AM
<b>Status</b>	Enabled

## Release Guest Licenses scheduled job

Releases licenses of Client Portal users whose access has expired.

You must encrypt the database connections settings for `CPGuestLicenses.exe`. For more information, see "About configuring database connection settings" on page 65.

`CPGuestLicenses.exe` uses both sets of server name and database name parameters (from the Login Settings utility and from the command line).

<b>File or Stored Procedure</b>	<cp_root>\ScheduledJobs\CPGuestLicenses.exe [DATABASETYPE], [DATABASESERVER], [DATABASE] Where: [DATABASETYPE] – SQL [DATABASESERVER] – name of the Changepoint database server [DATABASE] – name of the Changepoint database
<b>Schedule</b>	Daily at 12:00 AM
<b>Status</b>	Enabled

## Release Held Locks scheduled job

Releases system locks from the RecordLock table after there has been no activity for the designated time by deleting locks that belong to a Login session that has expired. Does not apply to PRJ or MSP. Default is 330 seconds.

The designated time can be set in the step.

For more information, see "Editing parameters for scheduled jobs " on page 102.

<b>File or Stored Procedure</b>	ReleaseLocks 330
<b>Schedule</b>	Every 6 minutes.
<b>Status</b>	Disabled

### Resource Demand Calculation scheduled job

Performs the updates to budgets for which the option to replace values in past periods with actual values has been enabled.

Updates the daily effort in the budgets based on changes made to fiscal period amounts.

Updates the working days table which is used by various parts of the application (such as resource demand analysis).

**Warning:** Do not set a schedule for this job. This Resource Demand Calculation job is called by the Update Time Rate job, and both are included in the chained scheduled jobs. For more information, see "Chained scheduled jobs" on page 83.

<b>File or Stored Procedure</b>	SetWorkingDays UpdateRD_NonWorkingDaysTable RollupProjectsByFiscalPeriods BU_ReplacePastWithActuals BU_SaveDailyEffort msdb..sp_start_job @job_name = 'Financial Analysis Summary'
<b>Schedule</b>	Not scheduled
<b>Status</b>	Enabled

### Resource Utilization scheduled job

Notifies the manager of a resource whose forecast hours related for the following week are less than 80% or more than 100% of a full week.

Generates the “Resource on Bench” and the “Resource Overloaded” email notifications.

<b>File or Stored Procedure</b>	ResourceLoad
<b>Schedule</b>	Once a week on Sunday at 7:20 PM.
<b>Status</b>	Disabled

## Revenue Recognition Tentative scheduled job

Runs the revenue recognition tentative process with saved values as of the last time “start on schedule” was chosen in the process.

<b>File or Stored Procedure</b>	RevRec_Tent_Schedule
<b>Schedule</b>	Once a day at 5:30 AM
<b>Status</b>	Disabled

## Session Clean Up scheduled job

Disconnects user sessions under the following circumstances:

- The user did not sign out of Changepoint properly and the session has been inactive for more than 5.5 minutes (330 seconds). This can occur when the user closes the browser without signing out, or when the user’s computer shuts down unexpectedly.
- The user has been logged on for more than 1 day.
- The user is accessing Changepoint using a mobile device and has not interacted with Changepoint for more than 5.5 minutes (330 seconds).

**Note:** When the user accesses Changepoint through a computer, as long as the main window is open, a keep-alive is triggered every 5 minutes to update the user’s Session record to prevent being logged off. With mobile access, the behavior is different.

Deletes inactive Resource Management Worksheet session IDs, and temporary session data for Resource Management Worksheet and Project Worksheet.

The default value for the allowed period of inactivity is 5.5 minutes (330 seconds). To modify this time, change the optional seconds parameter that is passed to the SessionCleanup stored procedure called by the Session Clean Up scheduled job.

For more information, see "Editing parameters for scheduled jobs " on page 102.

## 7. Configuring Changepoint Scheduled Jobs

---

To maintain performance for the Resource Management Worksheet, it is strongly recommended that you activate the Session Cleanup scheduled job.

<b>File or Stored Procedure</b>	SessionCleanup
<b>Schedule</b>	Every 5 minutes
<b>Status</b>	Enabled

### Survey Set Expired Survey scheduled job

Changes the status of expired “Automated” surveys to “Inactive”.

Deletes all pending approval survey records from the SurveySanTrigger table when the associated project or opportunity is deleted.

<b>File or Stored Procedure</b>	SV_SetExpiredSurveyInactive DeleteSurveySanTrigger
<b>Schedule</b>	Once a day at 1:00 AM
<b>Status</b>	Disabled

### Task Slippage scheduled job

Sends the notification to Project Manager and Engagement/Initiative Manager when either of the following occurs:

- the resource forecasts a later date than the original plan on the task
- the resource forecasts a larger number of hours than the original planned hours

Used by the “Task slippage” email notification.

<b>File or Stored Procedure</b>	TaskSlippage
<b>Schedule</b>	Once a week on Sunday at 8:00 AM.
<b>Status</b>	Disabled

## Time Conformance scheduled job

Sends email notices to resources whose total hours for the previous week were not in conformance with the required hours.

Generates the “Time sheet compliance report” email notification.

<b>File or Stored Procedure</b>	CheckTimeConformance
<b>Schedule</b>	Once a week on Sunday at 8:00 PM.
<b>Status</b>	Disabled

## Update Time Rate scheduled job

Updates the billing/cross charge rates, cost rates, fixed fee IDs and the billable/chargeable flag in the time tables based on resource/billing role/staffing level combinations and effective dates. Also updates the task actual cost into the task assignment table that is used by the Microsoft Project interface.

The Update Time Rate job is the first job in a chain of dependent scheduled jobs. For more information, see "Chained scheduled jobs" on page 83.

<b>File or Stored Procedure</b>	TI_UpdateTimeBillingRate UpdateAssignmentCost msdb..sp_start_job @job_name = 'Resource Demand Calculation'
<b>Schedule</b>	Once a day at 12:01 AM.
<b>Status</b>	Enabled

## Validate UDFs scheduled job scheduled job

Calculates and populates calculated field values for all entities for which a calculated configurable field has been configured. Before the calculation occurs, the job checks that the calculation formula is valid. If the formula is invalid, the job bypasses the field and writes a message to the Windows event log.

<b>File or Stored Procedure</b>	ValidateFormulas UpdateUDFCalculationField
<b>Schedule</b>	Once a day at 2:00 AM.
<b>Status</b>	Enabled

### Workflow Management scheduled job

Starts the workflow process, populates default configurable fields for system-generated resource requests, and processes workflow escalations for all records.

**Note:** WorkflowEscalation.exe requires a trusted connection.

<b>File or Stored Procedure</b>	<cp_root>\ScheduledJobs\ WorkflowEscalation.exe [DATABASESERVER], [DATABASE] Where: [DATABASESERVER] – name of Changepoint database server [DATABASE] – name of Changepoint database
<b>Schedule</b>	Every 30 minutes
<b>Status</b>	Enabled

### Editing parameters for scheduled jobs

Some of the scheduled jobs call stored procedures or run .exe files using parameters.

1. Access SQL Server Management Studio.
1. In the **Object Explorer** tree view, expand the following nodes:

*ServerName* > **SQL Server Agent** > **Jobs**

2. Right-click the job, and then select **Properties**.

The **Job Properties** dialog appears.

3. Select the **Steps** page, and then double-click the step that contains the parameter.

The **Job Step Properties** dialog appears.

4. In the **Command** field on the **General** page, edit the parameter value as required.

5. Click **OK**.
6. Click **OK** again.

## Monitoring database growth

The PerformanceCPGrowth scheduled job monitors the growth of database files and tables. The job gathers information on table growth, file growth, and I/O statistics. By default, the job collects counter data once a day. The data is stored in the following database tables:

- perfCPFileGrowth – Stores daily details about file growth. Data is saved for 70 days.
- perfCPFileGrowthSum – Stores monthly aggregate data on file growth. Data is saved for 10 years.
- perfTableGrowth – Stores daily details about table growth. Data is saved for 70 days.
- perfTableGrowthSum – Stores monthly aggregate data on table growth. Data is saved for 10 years.
- CPstartuptimes – Stores the startup times. Some counters are cumulative from the last SQL Server start. At startup they are reset.

You can use the data in these tables to monitor database growth over time. Under normal use, the database will grow. The database tables and files may shrink if auto-shrink is enabled or if you use the archiving functionality to move old data from the database to an archive database.

Abnormal database file shrinkage or growth could result in the following issues:

- server resources consumption
- performance problems
- physical file fragmentation
- a need for more maintenance

Therefore it is recommended that you monitor the database growth to diagnose potential issues.

You can use the following sample queries in SQL Server Management Studio to access the data gathered by the PerformanceCPGrowth scheduled job.

### File Growth Details Query

The following query retrieves file growth details over the past 50 days based on the current server date and time.

## 7. Configuring Changepoint Scheduled Jobs

---

```
declare @StartDate datetime, @EndDate datetime

set @StartDate = GetDate()-50
set @EndDate = GetDate()- 1

exec performanceCPfilesGrowthDetails @StartDate,@EndDate
GO
```

### File Growth Summary Query (for a range of months)

The following query retrieves file growth summary data for October 2012 – November 2012.

```
/*****
Parameters:
Start year
Start month
End year
End month
*****/

exec performanceCPfilesGrowthSum 2012,10,2012,11

GO
```

### File I/O Details Query

THE FOLLOWING QUERY RETRIEVES FILE I/O DETAILS (READS, WRITES, READS+WRITES) OVER THE PAST 50 DAYS BASED ON THE CURRENT SERVER DATE AND TIME.

```
declare @StartDate datetime, @EndDate datetime

set @StartDate = GetDate()-50
set @EndDate = GetDate()- 1

exec performanceCPFilesWritesDetail @StartDate,@EndDate
exec performanceCPFilesReadsDetail @StartDate,@EndDate
exec performanceCPFilesIODetail @StartDate,@EndDate

GO
```

### File I/O Summary Query

The following query retrieves file I/O summary data (reads, writes, reads+writes) for November 2012.

```
exec performanceCPfilesWriteSum 2012,11
exec performanceCPfilesReadSum 2012,11
exec performanceCPfilesIOSum 2012,11
```



GO

### Table Growth Details Query

The following query retrieves table growth details over the past 50 days based on the current server date and time.

This query contains two optional parameters for the column to order by (default: table name) and for the number of rows in the output list.

```
declare @StartDate datetime, @EndDate datetime

set @StartDate = GetDate()-50
set @EndDate = GetDate()- 1

/*****
parameters:
Start date
End date
Column to order by (optional)
Number of rows in the output list (optional)
*****/
exec performanceTableGrowthDetail @StartDate,@EndDate
exec performanceTableGrowthDetail @StartDate,@EndDate, 'RowsGrowth'
exec performanceTableGrowthDetail @StartDate,@EndDate, 'RowsGrowth', 30
exec performanceTableGrowthDetail @StartDate,@EndDate, NULL, 20

GO
```

### Table Growth Summary Query

The following query retrieves table growth summary data for the specified range of months. For a single month, set the start month and year parameters equal to the end month and year.

This query contains two optional parameters for the column to order by (default: table name) and for the number of rows in the output list.

```
/*****
parameters:
Start year
Start month
End year
End month
Column to order by (optional)
Number of rows in the output list (optional)
*****/
```

```
exec performanceTableGrowthSum 2011,10,2012,10
exec performanceTableGrowthSum 2011,10,2012,10,'InitialSize_kb'
exec performanceTableGrowthSum 2011,10,2012,10,'InitialSize_kb',10
exec performanceTableGrowthSum 2011,10,2012,10,NULL,10

GO
```

### Retaining daily demand distributions in past fiscal periods

By default, the daily distributions for demand are removed from past fiscal periods by the `Resource Demand Calculation` job. However, you can retain the daily distribution data by specifying a lag period in days after the fiscal period before the data is to be removed.

**Warning:** If you specify a lag period, then you must monitor the database to manage the database size and avoid performance degradation in certain areas.

The database administrator must run the following query to set the number of days for the lag period. The following query adds a 60 day lag after the end date of the fiscal period.

```
DECLARE @DailyAllocationCleanUpLag INT = 60--- Number of lag days
UPDATE ServerSettings SET DailyAllocationCleanUpLag = @DailyAllocationCleanUpLag
```

## 8. Installing and Configuring Cognos Analytics

---

### Overview of Cognos Analytics installation and configuration

Installation and configuration of Cognos Analytics takes place in several stages, which are described in the following sections:

- "Stage 1. Creating the Cognos Content Store database" on page 110
- "Stage 2. Installing the Cognos Application Tier" on page 110
- "Stage 3. Configuring the Cognos Application Tier" on page 111
- "Stage 4. Installing the Cognos web components" on page 114
- "Stage 5. Configuring Changepoint server integration for Cognos Analytics " on page 115
- "Stage 6. Assigning Changepoint security features for access to Cognos functionality" on page 116
- "Stage 7. Importing the Changepoint metadata package" on page 116
- "Stage 8. Setting up the data source for IBM Cognos Analytics" on page 117
- "Stage 9. Setting the security settings in Cognos" on page 119

For information about installing the Changepoint-Cognos Sync Utility, see "About the Changepoint-Cognos Sync Utility " on page 120.

#### About installing multiple instances of Cognos Analytics

For information about installing multiple Application Tier and web component instances, see "Installing additional instances of Cognos Application Tier and web components" on page 125.

You can configure Cognos Analytics to use multiple databases, for example to implement a Test and Training setup. For more information, see "Installing additional instances of Cognos Application Tier and web components" on page 125.

To configure Cognos for reports from more than one database, you must create and configure a separate connection to the data source for each database. For more information, see the IBM Cognos Analytics *Business Intelligence Administration and Security Guide*.

**Note:** For more information about the IBM Cognos Analytics software, see the IBM Cognos Analytics product documentation.

### Preparing to install Cognos Analytics

In addition to the standard Changepoint requirements, you require an overall understanding of the following:

- architecture of a Cognos Analytics solution
- TCP/IP port assignments within the deployment environment (for multiple Application Tier and web component instances)

### About roles and feature mapping between Cognos and Changepoint

Access to Cognos functionality is based on resource roles and features in Changepoint. During installation, Changepoint roles are mapped to Cognos groups, and Changepoint features are mapped to Cognos roles. The Cognos groups and roles control resources' access permissions to objects, such as directories, folders, and content in the Cognos software.

Each Cognos role has a specific set of access permissions. For a description of these roles, see the IBM Cognos Analytics *Business Intelligence Administration and Security Guide*.

The following table shows how the predefined Cognos roles are mapped to Changepoint features.

Cognos role	Changepoint feature
Authors	Cognos Professional Author
Consumers	Base User License
Directory Administrators	Cognos Administrator
Portal Administrators	Cognos Administrator
Query Users	Cognos Business Author
Report Administrators	Cognos Professional Author
Server Administrators	Cognos Administrator
Systems Administrator	Cognos Administrator

## Installation parameters for Cognos Analytics

Before you start the installation, use the following table to determine the parameter values for your installation. You are prompted for this information during installation and configuration.

**Note:** For server names, always use the *fully-qualified domain name*.

Field	Description
Destination for Cognos Analytics	The installation path for Cognos Analytics. Default is: C:\Program Files\ibm\cognos\analytics
Changepoint database server name, and port or instance name	
Changepoint database name	Default is Changepoint.
Changepoint database connections account ID and password	SQL account and password used to give the Changepoint applications access to the database.
Cognos content store database name	ContentStore
SQL server administrator ID and password	“sa” or equivalent account
Cognos dispatcher port (optional)	If required, port to use in place of “9300”.
SMTP mail server name and port	Used to send notifications from Cognos
Email account and password	Used to send notifications from Cognos
Email address of default sender	Used as the “From” address on notifications from Cognos
Changepoint website URL and port	
Changepoint website name	
Whether Changepoint website uses SSL	
Cognos Application Tier server name	

## Stage 1. Creating the Cognos Content Store database

**Note:** If you are upgrading Cognos Analytics, do not perform this stage.

1. On the Changepoint database server, log in as a system administrator.
2. From the root of the Cognos Analytics media, run `setup.exe` as an administrator.
3. Click **Step 1: Create Content Store Database**.

The **Select Database** appears.

4. In the **Select the SQL Server that Changepoint is installed on** field, enter the name of the Changepoint database server.
5. In the **Changepoint Database Name** field, enter the name of the Changepoint database. The default name is Changepoint.
6. In the **ContentStore Database Name** field, enter the name of the Cognos ContentStore database.
7. In the **Changepoint Id** field, enter the login ID of the SQL account used to give the Changepoint applications access to the database.
8. In the **Login ID** and **Password** fields, enter the SQL server administrator (sa) user ID and password.
9. Click **Start**.

## Stage 2. Installing the Cognos Application Tier

1. Log into the Cognos Application Tier server as system administrator.
2. Disable the server's antivirus software, or exclude `%ProgramFiles%\IBM`.

**Note:** If you choose to keep your antivirus software running, the installation will take much longer because the antivirus software scans each file that is installed.

3. From the root of the Cognos Analytics media, run `setup.exe` as an administrator.
4. Click **Step 2: Install and Configure Cognos Application Tier**, and then follow the prompts.
5. At each prompt, select or type the appropriate parameter from the table in "Installation parameters for Cognos Analytics" on page 109.
6. On the **Installation Completed** screen, click **Finish**.

7. Review the installation log (C:\Program Files (x86)\Changepoint\Changepoint\InstallLog) to ensure that no warnings were generated during the installation. Follow the instructions to manually resolve the issues, if any.
8. Right-click **Computer**, and select **Properties > Advanced system settings > Performance > Settings > Data execution prevention**.
9. In the **Data Execution Prevention** tab, do one of the following:
  - Select **Turn on DEP for essential Windows programs and services only**
  - Select **Turn on DEP for all programs and services except those I select**, then add as exceptions all Cognos executables in the Cognos directories, for example, java.exe, cogbootstrap.exe, etc.

The default Cognos root directory is: %programfiles%\ibm\cognos\analytics\
10. If you changed the selected option in step 9, restart the server.


## Stage 3. Configuring the Cognos Application Tier

The Cognos Application Tier components are configured using the IBM Cognos Analytics Configuration application.

1. On the Cognos Application Tier server, log in as administrator.
2. From the **Start** menu, launch **IBM Cognos Configuration**.
3. Click **OK** to acknowledge that the configuration files have been updated.

To configure environment properties

1. In the **Explorer** pane, select **Environment**.
2. In the **Environment - Group Properties** pane, for each URI field that includes localhost:9300 (for example, External dispatcher URI), change localhost to the name of the Cognos Application Tier server.

Some URI fields, for example, Content Manager URIs, have an **Edit**  button that opens a dialog box to edit multiple URIs

**Note:** By default, Cognos Analytics uses port 9300 for the dispatcher. To change the dispatcher port, replace 9300 with the new port number in all dispatcher and Content

Manager URIs. You must provide the URIs of the Internal and External dispatchers in Stages 4 and 5 respectively.

To configure authentication properties

1. In the **Explorer** pane, select **Security > Authentication**.
2. In the **Authentication - Component Properties** pane, **Inactivity timeout in seconds** field, enter 43200.
3. In the **Explorer** pane, select **Security > Authentication > Cognos**.
4. In the **Cognos - Namespace - Resource Properties** pane, **Allow anonymous access?** list, select **False**.

**Note:** Set this parameter to **False** regardless of whether you use Single Sign-on (SSO) for Changepoint.

5. In the **Explorer** pane, right click **Security > Authentication**, and select **New resource > Namespace**.

The **New Resource - Namespace** dialog box appears.

6. In the **Name** field, enter **Changepoint**.
7. In the **Type (Group)** list, select **Custom Java Provider**.
8. Click **OK**.
9. In the **Explorer** pane, select **Security > Authentication > Changepoint**.
10. Complete the following fields in the **Changepoint - Namespace - Resource Properties** pane:
  - a. In the **Namespace ID** field, enter **Changepoint**.
  - b. In the **Java class name** field, enter **com.changepoint.cap.CapControl**. The Java class name is case-sensitive.
  - c. In the **Selectable for authentication** list, select **True**.

To configure Content Manager properties

1. In the **Explorer** pane, right click **Data Access > Content Manager > Content Store**, and select **Delete**.



2. In the **Explorer** pane, right click **Data Access > Content Manager**, and select **New resource > Database**.

The **New resource - Database** dialog box appears.

3. In the **Name** field, enter **Content Store**.
4. In the **Type Group** list, select **Microsoft SQL Server database**.
5. Click **OK**.
6. In the **Explorer** pane, select **Data Access > Content Manager > Content Store**.
7. Complete the following fields in the **Content Store - Database - Resource Properties** pane:
  - a. In the **Database server with port number or instance name** field, enter the name and port or instance name of the Changepoint database server.
  - b. In the **Database name** field, enter **ContentStore**.


**Note:** This is the default name of the content store database that was created in "Creating the Cognos Content Store database" on page 110.

8. Click in the **User ID and password** field, then click the **Edit** button.
9. In the **User ID** field and **Password** and **Confirm Password** fields, enter the SQL account and password used to give the Changepoint applications access to the database.
10. To test the Content Manager database connection, right click **Data Access > Content Manager > Content Store**, and select **Test**.

To send Cognos workflow notifications by email

1. In the **Explorer** pane, select **Data Access > Notification**.
2. Complete the following fields in the **Notification - Component Properties** pane:
  - a. In the **SMTP mail server** field, enter the name and port of the mail server to use to send notifications.
  - b. In the **Default sender** field, enter the email address to use as the "From" address on email notifications.

**Note:** This does not have to be the same account that is in the **Account and password** field

3. Click in the **Account and password** field, then click the **Edit**  button, and complete the **Value - User ID and password** dialog box:
  - a. In the **User ID** field, enter the user ID for any valid account on the mail server. This is the account that notifications are sent from.
  - b. In the **Password** and **Confirm Password** fields, enter the password of the user ID account.

**Note:** If you do not configure a mail server, when you start the IBM Cognos Analytics service, a warning message appears when the mail server connection is tested. You can ignore the warning.

To increase the timeout value for the Cognos service to start up

You can add an entry to the `cogconfig.prefs` file to increase the timeout value if the Cognos service fails during start up.

1. Exit from the IBM Configuration panel.
2. Open the `cogconfig.prefs` file using Notepad++. The default location of the file is:

```
C:\Program Files\ibm\cognos\analytics\configuration\cogconfig.prefs
```

3. Add the following entry to the file:

```
ServiceMaxTries=1200
```

The `ServiceMaxTries` property represents the number of times that IBM Cognos Configuration checks the progress of the start request. The default is 360.

To save the Cognos Application Tier configuration

1. Click **Save**.
2. When the **Close** button is enabled, click it.
3. To start the IBM Cognos Analytics service, open the IBM Cognos Configuration panel, and then click the **Start** button.

## Stage 4. Installing the Cognos web components

1. On each Changepoint web server, sign in as administrator.
2. Disable the server's antivirus software, or exclude `%ProgramFiles%\IBM`.

**Note:** If you choose to keep your antivirus software running, the installation will take much longer because the antivirus software scans each file that is installed.

3. From the root of the Cognos Analytics media, run `setup.exe` as an administrator.
  4. Click **Step 3: Install the web components to enable Cognos Analytics on the Changepoint website** and then follow the prompts.
  5. Complete the **Changepoint Cognos Web Components** dialog box:
    - a. In the **Cognos Dispatcher server name** field, enter the server name from the Internal dispatcher URI of the Cognos Application Tier server. For example:  
  
`cognos.domain.com`
  - Note:** Do not include the port, or the path `/bi/v1/dispatch`, or the path `p2pd/servlet/dispatch`
  - b. In the **Dispatcher Port** field, enter the port assigned to the internal dispatcher: default 9300, or the value you set in Stage 3.
  - c. If the Cognos Application Tier uses SSL, select the **Use SSL for Dispatcher URI** check box.
6. Click **Next**.
  7. In the **Choose the Changepoint Enterprise website** list, select the name of the Changepoint website
  8. In the **Application Pool Name** field, enter the Application Pool name used by Cognos. Default name is **IBM Cognos 11**.
  9. Click **Next**, then click **Install**.

## Stage 5. Configuring Changepoint server integration for Cognos Analytics

1. Sign in to Changepoint Administration.
2. Select **General > Server Integration**.
3. Select the **Enable Cognos integration** check box.
4. In the **Cognos application tier URL** field, enter the external dispatcher URI of the Cognos Application Tier server. For example:

`http://cognos.domain.com:9300/p2pd/servlet/dispatch`

5. Click **Save**.

### Stage 6. Assigning Changepoint security features for access to Cognos functionality

By default, all Changepoint resources can access **Analytics Portal** and **Create Dashboard** and do the following:

- run reports
- set up report schedules

The **Base User** security feature controls the general access granted to all resources. To allow resources to access other Cognos reporting functionality, you must assign the following Cognos-related features to resources or roles:


- **View Reports** feature – View Cognos reports and other Cognos content in the **Reports** tree view in Changepoint.
- **Cognos Business Author** feature and **Cognos Professional Author** feature – Create or edit a report using the reporting interface, and manage report scheduling. These features provide the same access rights, but you can make them different by granting different access rights or restricting access for one of them in Cognos Analytics.
- **Cognos Administrator** feature – Administer IBM Cognos Analytics software configuration, server settings, and all security aspects; install and run the Changepoint-Cognos Sync Utility.


For more information about assigning the security features to resources and roles, see the *Changepoint Administration Guide*.

### Stage 7. Importing the Changepoint metadata package

If you have more than one Changepoint website, apply this procedure on only one.

1. Sign in to Changepoint as Changepoint administrator.
2. Click **Analytics > Analytics Portal**. The **IBM Cognos Analytics** portal appears.
3. Click **Manage**, then click **Administration console**. The **IBM Cognos Administration** console appears.
4. Click the **Configuration** tab.


5. In the left pane, click **Content Administration**. **Administration** details appear in the **Configuration** tab.
6. Click the new import icon .
7. In the **Deployment archive** section, select **ContentStore**, then click **Next**.
8. In the **Password** field, enter **Changepoint**, then click **OK**.
9. In the **Specify a name and description - New Import Wizard** pane, in the **Name** field, change the default from ContentStore to Import ContentStore.
10. Click **Next**, **Next**, then **Next** again.
11. In the **Select an action - New Import Wizard** pane, select the **Save and run once** option, and click **Finish**.
12. Complete the **Run with options - Import ContentStore** pane:
  - a. In the **Time** option section, select **Now**. All the **Content** check boxes are selected by default.
  - b. In the **Report specification upgrade** option section, select **Keep the existing report specification versions**.
  - c. In the **Store IDs** option section, select **Do not assign new IDs during import**. Ignore the warning message.
13. Click **Run**, then click **OK**.
14. To view run history and confirm that the package was imported successfully, click **More**, and then click **View run history**.
15. Click **Close**.

The **Administration** details includes two packages: Import ContentStore and ContentStore. These packages are not required.
16. Select the check boxes for both packages, and click the delete icon .
17. Click **Log off**.

## Stage 8. Setting up the data source for IBM Cognos Analytics

**Note:** If you have more than one Changepoint web site, apply this procedure on only one.

1. Sign in to Changepoint as Changepoint administrator.

2. Click **Analytics > Analytics Portal**. The **IBM Cognos Analytics** portal appears.
3. Click **Manage**, then click **Administration console**. The **IBM Cognos Administration** console appears.
4. Click the **Configuration** tab.
5. In the left pane, click **Data Source Connections. Directory > Cognos** details appear in the **Configuration** tab.
6. Click the new data source icon .
7. In the **Name field**, enter **Changepoint**, and then click **Next**.
8. Complete the **Specify the connection - New Data Source wizard**:
  - a. In the **Type** list, select **Microsoft SQL Server (Native Client)**.
  - b. In the **Isolation level** field, select **Specify a value** and then select **Read Uncommitted**.
  - c. Select the **Configure JDBC connection** check box.
  - d. Click **Next**.
9. Complete the **Specify the Microsoft SQL Server (Native Client) connection string - New Data Source wizard**:
  - a. In the **Server name** field, enter the name of the database server.
  - b. In the **Database name** field, enter the name of the Changepoint database.
  - c. Select the **Signons** option.
  - d. Select the **Password** check box.
  - e. Select the **Create signon that the Everyone group can use** check box.
  - f. In the **User ID** field, and **Password** and **Confirm Password** fields, enter the SQL account and password used to give the Changepoint applications access to the database.
10. Click the **Test the connection** link:
  - a. Click **Test**, then click **Close**.
  - b. Click **Close** again.

- c. Click **Next**.
11. Complete the following fields in the **Specify the Microsoft SQL Server (JDBC) connection string - New Data Source** wizard:
  - a. In the **Server name** field, enter the name of the Changepoint database server.
  - b. In the **Database name** field, enter the name of the Changepoint database.
12. Click the **Test the connection** link:
  - a. Click **Test**, then click **Close**.
  - b. Click **Close** again.
  - c. Click **Next**.
13. Click **Finish**.

The Changepoint data source now appears under **Directory > Cognos** in the **Configuration** tab.

14. Click the **Changepoint** data source link to display the data source connection, which is also named Changepoint.
15. Restart Cognos Services on the Cognos Application Tier.

## Stage 9. Setting the security settings in Cognos

When Cognos imports user information from Changepoint, every user is given the Cognos administrator role. This procedure removes that role from all users, except for those users that have specifically been assigned the Cognos Administrator feature.

Optionally, you can grant Changepoint users the access rights to create their own portals in Cognos Workspace.

To remove the administrator role from Changepoint users

1. Sign in to Changepoint as Changepoint administrator.
2. Click **Analytics > Analytics Portal**. The **IBM Cognos Analytics** portal appears.
3. Click **Manage**, then click **Administration console**. The **IBM Cognos Administration** console appears.
4. Click **Security**, then click **Cognos**.

5. Scroll to the System Administrator role, and then click **More**.
6. Click **Set Members**, and select **Everyone**.
7. Click the **Remove** link.
8. Click **OK**.

### About the Changepoint-Cognos Sync Utility

The Changepoint-Cognos Sync Utility synchronizes the Changepoint-Cognos data model of the database with Changepoint. You must synchronize the data model when:

- you import a base data model that you received from Changepoint Canada ULC. The base data model contains the default field labels for the standard fields in the supported languages.
- you make one or more of the following changes in Changepoint Administration:
  - create a configurable field
  - modify a configurable field label
  - modify the field label of a standard field that is included in the model

#### Hardware and software requirements

For details of the hardware and software requirements of the workstation that is used to run the Changepoint-Cognos Sync Utility, see the *Changepoint Product Architecture and Technology Matrix* and the *Changepoint Hardware Recommendations Guide*.

#### Synchronization process overview

After you upgrade Changepoint and install and configure Cognos Analytics, you must import the base data model from the new release, and then synchronize the model. This initial synchronization creates a new revision with your configurable fields, and labels that you modified before you upgraded.

New revisions are incremental, which means that only configurable fields that have been added and field label changes that have been made since the previous revision are synchronized.

The length of time for the synchronization depends on the number of configurable fields that you have, and the number of field labels that have been changed in Changepoint Administration since the last time that a revision was created. Only fields for which values



have been entered and saved in Changepoint are synchronized. That is, if you create a new configurable field for which there are no values, the field and the label for that configurable field are not synchronized.

**Tip:** Record the length of time that it takes to import the base data model and create the initial revision during testing. This information will help you to plan the production implementation.

**Note:** Use the fully-qualified domain name for server names.

### About the Changepoint-Cognos Sync Utility log file

The log file `CognosUILog.txt` is located in:

`C:\Program Files (x86)\Changepoint\Changepoint\InstallLog`

**Warning:** The Sync Utility does not monitor the size of the log file. You must manually delete or truncate the log file.

### Ad hoc changes to field labels in reports

To make a one-time field label change in a report without changing the Changepoint-Cognos data model, either set the Text Source **Source type** to text for the field label and manually override the value in a single language, or set a text source variable for the field label, then use the Cognos Condition Explorer to set the value. For more information, see the IBM Cognos Analytics online help.

## About using the Sync Utility with multiple Cognos Analytics instances

When you install the Changepoint-Cognos Sync Utility, it is configured for a specific database on a specific database server.

Therefore, if you have multiple databases (for example, separate databases for production, test, and training), then you require a separate administrator workstation with the Sync Utility installed on it for each database, even if all of the databases use the same SQL Server version.

## Upgrading the Sync Utility

You must always use the version of the Sync Utility that corresponds to the Changepoint version.

To upgrade the Sync Utility, you must uninstall the previous release sync prerequisite and Sync Utility from the Windows Control Panel, and then install the current release version.

### Installing the Sync Utility

By default, the Changepoint-Cognos Sync Utility is installed and configured for the PSA version of Changepoint. To configure the Sync Utility for Changepoint PPM, see step 11.

To install the prerequisites for the sync utility

1. Disable User Access Control.
2. From the root of the Cognos Analytics media, run `setup.exe`.
3. Click the **Cognos Sync Utility** Tab and select **Step 1: Install Changepoint Sync Tool Prerequisites**. The Sync Tool prerequisites must be reinstalled on each client.
4. Click **Next**, then click **Install**.

To install the sync utility

1. As administrator, from the root of the Cognos Analytics media, run `setup.exe` as an administrator.
2. Click on the Cognos Sync Utility Tab and select **Step 2: Install Changepoint Sync Utility**.
3. In the **Cognos Dispatcher Server Name** field, enter the name of the Cognos Application Tier server.
4. In the **Dispatcher Port** field, enter the port used for the Cognos dispatcher.
5. If the Cognos Application Tier uses SSL, select the **SSL Enabled** check box.
6. In the **Enterprise Website Server Name** field, enter the name of the Changepoint web server.
7. In the **Enterprise Port** field, enter the port used by the Changepoint website.
8. If the Changepoint website uses SSL, select the **SSL Enabled** check box.
9. Click **Next**, then click **Install**, then click **Finish**.
10. In the **Changepoint Connection Settings** dialog box:
  - a. In the **Connection Settings** list, select **Changepoint Window Service, Scheduled jobs and Utilities**.
  - b. In the **File location** field, browse to:

<cp\_common>\Cognos Client Tools\CognosClientTools.exe.config

For more information, see "Configuring database connection settings" on page 65

A shortcut named **Changepoint Cognos Sync Utility** is added to the **Start** menu.

11. To configure the Sync Utility for Changepoint PPM:

- a. Open the `CognosClientTools.exe.config` file in a text editor.
- b. Search for the `CompanyProfile` key, and change the value from `PSO` to `ITD`.
- c. Save and close the file.

12. Import the initial base data model from the Cognos Analytics media Setup/Model folder.

### Uninstalling the Sync Utility

You uninstall the Sync Utility from the **Windows Control Panel**.

## Importing the base data model

When you import a base data model, the previously imported base data model and later revisions are replaced by the newly imported base data model.

**Note:** To add configurable fields and field label changes to the model, you must create a new revision after importing a base data model.

1. Launch the Changepoint-Cognos Sync Utility, and sign in with your user ID and password.
2. In the **Changepoint-Cognos Sync Utility** dialog box, click **Import Revision**.
3. Select the zip file that corresponds to the Changepoint version:
  - `Model.zip` (Changepoint PSA)
  - `Model-ITD.zip` (Changepoint PPM)
4. Click **OK**.

## Adding customized field labels and configurable fields to the data model

To add configurable fields and field label changes to the data model, you must create a new revision after importing the base data model.

1. Launch the Changepoint-Cognos Sync Utility, and sign in with your user ID and password.
2. In the **Changepoint-Cognos Sync Utility** dialog box, click **New Revision**.

The **New Revision** dialog box appears.

3. In the **Comments** field, enter a comment.
4. Do the following:
  - To import configurable fields, select the **Include configurable field delta** check box.
  - To import new or changed field labels or page content strings, select the **Include language string delta** check box.
5. Click **Publish Model**.
6. Advise report creators to open each of their reports in the Analytics Portal and follow the prompts to accept the changed package.

### Reverting to a previous version of the base data model

You can revert to the imported base data model, or to a previous revision. All revisions that were published after the one you revert to are deleted.

1. Launch the Changepoint-Cognos Sync Utility, and sign in with your user ID and password.
2. In the **Changepoint-Cognos Sync Utility** dialog box, double-click the version you want to revert to.
3. In the **Model Detail** dialog box, click **Revert model**.
4. Advise report creators to open each of their reports in the Analytics Portal and follow the prompts to accept the changed package.

## 9. Installing additional instances of Cognos Application Tier and web components

---

### About installing additional instances of Cognos Application Tier and web components

You can install additional instances of the Cognos Application Tier on a server and the web components on a web server. For example, you could create a combined Test and Training environment using a single physical server for the Cognos Application Tier instances, and a single physical web server for the Changepoint websites.

**Note:** The initial instances of the Cognos Application Tier, content store database, and web components must be installed using the installer supplied by Changepoint Canada ULC.

All procedures must be executed as an administrator.

### Installation parameters for additional instances of Cognos Application Tier and web components

The following table lists the parameter values that you will require during installation and configuration.

**Note:** Use the fully-qualified domain name for server names.

Field	Description
Changepoint database server name, and port or instance name	
Changepoint database name	
Cognos ContentStore database name	
Changepoint database connections account ID and password	SQL account and password used to give the Changepoint applications access to the database.
Changepoint website URL and port	
Changepoint website name	

Field	Description
Cognos Application Tier server name	
Port to use for new Cognos instances	Default port for the initial instance is 9300
Local log server port	Default port for the initial instance is 9362
Local shutdown port	Default port for the initial instance is 9399
SMTP mail server name and port	Used to send notifications from Cognos
Email account and password	Used to send notifications from Cognos
Email address of default sender	Used as the "From" address on notifications from Cognos

### Installing an additional Cognos Application Tier instance

The content store database is installed on the Changepoint database server. Each Application Tier instance requires a separate content store database.

**Warning:** Be sure to specify a different ContentStore database name and Changepoint database than the names used on the existing installation. If you use the names from the existing installation, you will damage it.

#### Installing an additional content store database

You can use the installer from the Cognos Analytics media to install an additional Cognos ContentStore database.

1. On the Changepoint database server, log in as a system administrator.
2. From the root of the Cognos Analytics media, run `setup.exe` as an administrator.
3. Click **Step 1: Create Content Store Database**.

The **Select Database** appears.

4. In the **Select the SQL Server that Changepoint is installed on** field, enter the name of the Changepoint database server.

5. In the **Changepoint Database Name** field, enter the name of the additional Changepoint database.
6. In the **ContentStore Database Name** field, enter the name of the additional Cognos ContentStore database.
7. In the **Changepoint Id** field, enter the login ID of the SQL account used to give the Changepoint applications access to the database.
8. In the **Login ID** and **Password** fields, enter the SQL server administrator (sa) user ID and password.
9. Click **Start**.

### Installing an additional Cognos Application Tier component

1. Log into the Cognos Application Tier server as system administrator.
2. Close the IBM Cognos Configuration panel, if open.
3. From the root of the Cognos Analytics media, run `setup.exe` as an administrator.
4. Click **Step 2: Install and Configure Cognos Application Tier**, and then follow the prompts. Dispatcher port number 9400 is assigned to the second instance if 9300 was assigned to the first instance.
5. To avoid damaging the existing installation, you must ensure that the installation directory is unique (for example, `C:\Program Files\ibm\cognos\analytics_at2`).
6. On the **Installation Completed** screen, click **Finish**.
7. Review the installation log (`C:\Program Files (x86)\Changepoint\Changepoint\InstallLog`) to check for warnings. Follow the instructions to manually resolve any warnings.

### Configuring an additional Cognos Application Tier component

The Cognos Application Tier components are configured using the IBM Cognos Configuration application.

Launch the newly installed instance, for example:

All Programs > IBM Cognos - AppTier2 > IBM Cognos Configuration

where IBM Cognos - AppTier2 is the unique shortcut folder name you entered in "Installing an additional Cognos Application Tier component" on page 127.

**Note:** A shortcut is created for each instance. You can also launch the IBM Cognos Configuration from the following folder:

```
C:\Program Files\ibm\cognos\analytics\bin64\cogconfigw.exe
```

To configure environment properties

1. In the **Explorer** pane, select **Environment**.
2. Complete the following fields in the **Environment - Group Properties** pane:
3. For each URI field that includes `localhost:9300`, replace:
  - `localhost` with the name of the Cognos Application Tier server
  - `9300` with the port for the new application instance


To configure notification properties

1. In the **Explorer** pane, select **Notification**.
2. In the **Notification - Component Properties** pane, in the **SMTP mail server** field, enter the name and port of the mail server to use to send notifications.

To configure Content Manager properties

1. In the **Explorer** pane, right-click **Content Store** and select **Delete**.
2. In the **Explorer** pane, right click **Data Access > Content Manager**, and select **New resource > Database**.
3. Complete the **New resource - Database** dialog box:
  - a. In the **Name** field, enter the name of the content store database you created earlier, for example, `ContentStore_CS2`.
  - b. In the **Type** list, select **Microsoft SQL Server database**.
  - c. Click **OK**.
4. In the **Explorer** pane, select **Data Access > Content Manager > Content Store**.
5. Complete the following fields in the **Content Store - Database - Resource Properties** pane:



- a. In the **Database server with port number or instance name** field, enter the name and port or instance name of the Changepoint database server.
  - b. In the **Database name** field, enter the name of the content store database you created earlier, for example, ContentStore\_CS2.
6. Click in the **User ID and password** field, then click the **Edit**  button, and complete the **Value - User ID and password** dialog box:
  - a. In the **User ID** field, enter the SQL account used to give the Changepoint applications access to the database.
  - b. In the **Password** and **Confirm Password** fields, enter the password of the SQL account.
7. Click **OK**.

To configure authentication properties

1. In the **Explorer** pane, select **Security > Authentication**.
2. In the **Authentication - Component Properties** pane, in the **Inactivity timeout in seconds** field, enter 43200.
3. In the **Explorer** pane, select **Security > Authentication > Cognos**.
4. In the **Cognos - Namespace - Resource Properties** pane, in the **Allow anonymous access?** list, select **False**.

**Note:** Set this parameter to **False** regardless of whether you use Single Sign-on (SSO) for Changepoint.

5. In the **Explorer** pane, right click **Security > Authentication**, and select **New resource > Namespace**.
6. Complete the **New Resource - Namespace** dialog box:
  - a. In the **Name** field, enter Changepoint.
  - b. In the **Type** list, select Custom Java Provider.
  - c. Click **OK**.
7. In the **Explorer** pane, select **Security > Authentication > Changepoint**.

8. Complete the following fields in the **Changepoint - Namespace - Resource Properties** pane:
  - a. In the **Namespace ID** field, enter `Changepoint`.
  - b. In **Java class name** field, enter `com.changepoint.cap.CapControl`. The Java class name is case sensitive.
  - c. In the **Selectable for authentication** list, select **True**.
9. Click **Test**.
10. Save the configuration file.
11. Click **Start**.

### Installing additional Cognos web component instances on a single server

**Warning:** Be sure to specify different Application Pool name and Changepoint website names than the names used on the existing installation. If you use the names from the existing installation, you will damage it.

### Installing an additional Cognos web component

1. On the Changepoint web server, sign in as administrator.
2. From the root of the Cognos Analytics media, run `setup.exe` as an administrator.
3. Click **Step 3: Install the web components to enable Cognos Analytics on the Changepoint website**.
4. Follow the prompts.
5. In the **CP\_CognosWebComponents** dialog box:
  - a. In the **Cognos Dispatcher server name** field, enter the server name from the Internal dispatcher URI of the Cognos Application Tier server. For example:  
`cognos.domain.com`  
**Note:** Do not include the port, or the path `/bi/v1/dispatch`, or the path `p2pd/servlet/dispatch`.
  - b. In the **Dispatcher Port** field, enter the port assigned to the internal dispatcher that will be used for the additional installation.

- c. If the Cognos Application Tier uses SSL, select the **Use SSL for Dispatcher URI** check box.
6. Click **Next**.
7. In the **Choose the Changepoint Enterprise website** list, select the name of the additional Changepoint website that you will install the Cognos web components on.
8. In the **Application Pool Name** field, enter a unique Application Pool name (for example, IBM Cognos 11\_2) that will be used by Cognos.

**Warning:** Do not use an existing application pool name.

9. Click **Next**, then click **Install**.
10. Complete the configuration by doing the following:
  - "Stage 5. Configuring Changepoint server integration for Cognos Analytics " on page 115
  - "Stage 6. Assigning Changepoint security features for access to Cognos functionality" on page 116
  - "Stage 7. Importing the Changepoint metadata package" on page 116
  - "Stage 8. Setting up the data source for IBM Cognos Analytics" on page 117
  - "Stage 9. Setting the security settings in Cognos" on page 119.
11. Import the base data model.

## Pointing the Cognos web component to a different server

1. On the Changepoint web server, launch IIS Manager.
2. Under the Changepoint Enterprise website, locate the ibmcognos application.
3. On the /ibmcognos Home page in the IIS section, double-click **URL Rewrite**.
4. on URL rewrite page detail, double-click ARR All folder.
5. On the **Edit Inbound Rule** page, in the **Action** section, **Rewrite URL** field, change the Cognos instance name and port number. For example:

`http://cognosB.com:9500/{R:0}`

## Configuring the Custom Authentication Provider (CAP) manually

The following procedure configures the Changepoint database that is used by Cognos for login authentication.

1. You must use the instance of `java.exe` that is installed with Cognos to configure the CAP. It is strongly recommended that you include the path to the `java.exe` instance in the **path** system environment variable:

```
C:\Program Files\ibm\cognos\analytics\jre\bin
```

2. Run the following statements from a command line in the  
<new cognos instance>\webapps\p2pd\WEB-INF\lib directory. For example:

```
%programfiles%\ibm\cognos\analytics_at2\webapps\p2pd\WEB-INF\lib
```

where `analytics_at2` is the unique installation directory name that you entered in "Installing an additional Cognos Application Tier component" on page 127.

3. Encrypt the database connection parameters:

```
java -jar changepointCAP.jar ..\..\..\..\configuration\CAP.properties  
<sqlserver> <userid> <password> <ChangepointDB>
```

where:

- `sqlserver` – name of the Changepoint database server. If required, include the instance name.
- `userid` – SQL account used to give the Changepoint applications access to the database.
- `password` – password for the SQL account.
- `ChangepointDB` – name of the database.

4. Test the Encrypted Database Connection Parameters:

```
java -jar changepointCAP.jar ..\..\..\..\configuration\CAP.properties
```

## 10. Configuring Intelligent Forms

---

### About Intelligent Forms

Intelligent Forms is a wizard-driven solution for entering data and generating documents. You use Intelligent Forms to simplify work for resources by streamlining complex tasks and automating data entry processes.

The Changepoint Intelligent Forms connector integrates Intelledox Infiniti with Changepoint. After the connector is installed and the standard form templates are configured, resources can access the standard forms from the Changepoint interface. The forms guide resources through the process of creating or updating an entity record or creating a document. Resources with Infiniti administrator access can access Infiniti Manage from the **Intelligent Forms** menu in Changepoint Administration.

This document includes instructions that are specific to using Infiniti Manage with Changepoint. For general information about using Infiniti Manage, please refer to the Intelledox Knowledge Base, which is available at:

<http://ixsupport.intelledox.com/kb/root.aspx>.

### Standard form templates

Changepoint includes seven standard form templates, which can be used as-is, or which can be used as templates and enhanced to meet business requirements. The standard form templates that create entity records include all of the standard fields that are mandatory by default.

**Note:** The Create Project Request form is preconfigured to support three request types in Changepoint: Issue, Risk, and Change Request. If you use different request types then you must update the form with the appropriate request types. If you require any assistance in applying this change, please contact Changepoint services.

**Note:** Before you can use the standard form templates in your Changepoint installation, you must add all of the mandatory fields that are specific to your organization. This includes both standard Changepoint fields and configurable fields that have been set as mandatory in metadata.

<b>Form Purpose</b>	<b>How to access the form</b>
<b>Create Engagement</b> Create a company and contacts, engagement, project, tasks, and knowledge management items.	Services > Create Engagement
<b>Create Opportunity</b> Create an opportunity from a company profile.	Company profile > Actions menu > View > Intelligent Forms > Create Opportunity
<b>Create Project</b> Create a project from an engagement profile.	Engagement profile > Actions menu > View > Intelligent Forms > Create Project
<b>Create Project Request</b> Create a request from a project profile.	Project profile > Actions menu > View > Intelligent Forms > Create Project Request
<b>Project Status Report</b> Create a status report from a project profile.	Project profile > Actions menu > Project Status Report
<b>Statement of Work (SOW)</b> Create a statement of work from an engagement profile.	Engagement profile > Actions menu > View > Intelligent Forms > Statement of Work (SOW)
<b>Generate Invoice Document</b> Generate an invoice document in PDF format.	Invoice profile > Actions menu > View > Intelligent Forms > Invoice Document

## Configuring Intelligent Forms

After installing Intelligent Forms, you must do the following.

1. Sign into Changepoint Administration.
2. Import the Changepoint license file (.lic) for Intelligent Forms (**Tools > License Management**).
3. In user setup (**Resources > User Setup**), assign either the security feature **Access Forms Administration** or **Access Document Administration** to your user. These security features allow you to access Infiniti Manage from Changepoint Administration.
4. Sign out of Changepoint and then sign back in to trigger the security feature changes.
5. In Changepoint Administration, click **Intelligent Forms > Infiniti Manage**.

6. Sign in to Infiniti Manage using "admin" for both the user name and password.
7. Enter all of the license keys for the Intelledox Infiniti software
  - a. In the License Holder field, enter your company name as provided with your licenses.
  - b. In the Product License field, enter your product license.
  - c. Click **Save**.
  - d. Enter each additional license into the Key field and click **Add** after each one.
  - e. Click **Save**.
8. Click **Data Sources** and then update the connection strings for each of the data sources as follows:
  - a. In the **Connection String** field, replace {{ChangepointDB}} with the name of the Changepoint database and {{ChangepointDBServer}} with the database server.
  - b. In the **Connect with these credentials** field, enter the user ID and password to be the same as used in the Changepoint web.config connection string.
9. Republish the document form projects in PDF format:
  - a. Click **Folders**, then select the **Project** folder.
  - b. Click **Project Status Report**.
  - c. In the **Format** section, clear the “**Microsoft Word Document (docx, docm)**” check box.
  - d. Select the **Portable Document Format(pdf)** check box.,
  - e. Click **Save**.
  - f. Repeat this procedure for the following form projects:
    - Statement of Work (SOW) in the **Engagement** folder
    - Generate Invoice Document in the **Invoice** folder
10. Access each form project, click **Design App** and then add the user-defined mandatory fields for the entities:
  - Create Engagement (company, contact, engagement, project, task, task assignment)
  - Create Opportunity (company, opportunity)

- Create Project (project, task, task assignment)
- Create Project Request (request)

**Note:** For more information about using **Design**, see the Intelledox knowledge base or contact Changepoint support to engage professional services

11. In Changepoint Administration, assign the security features for Intelligent Forms to resources as required. For more information about the security features, see the *Security Access Reference Guide* or the online help.
12. Advise resources to add the **Intelligent Forms in Progress** portlet to their default portal on the home page (**Preferences > Portals**). Resources require the portlet to access the partially completed forms that they have saved to continue working on later.

**Tip:** If all resources have access to the forms, then you can make the portlet mandatory in personal portals (**User Interface > Portlet Management**).

### Configuring Intelligent Forms on an SSO environment

To enable Intelligent Forms to work on a Changepoint SSO environment, you must enter the email address (**Email**) and password (**Web password**) for each resource into their user account in Changepoint. The email and password is required by the API for forms authentication.

**Note:** The WebServicesAPI site under Enterprise must be set as Application Authentication.

### Configuring Intelligent Forms in a load-balanced environment

If you are installing Intelligent Forms in a load-balanced environment, you must ensure that all of the URLs are configured to point to the same instance of a website and not to the Load Balancer URL because the underlying security token must always be generated from the same website.

1. Sign in to Infiniti Manage.
2. Click **Settings > Connector Settings**.
3. Select **Changepoint**.
4. Ensure that all of the URLs are configured to point to the same instance of a website and not to the Load Balancer URL.



5. In each instance of the InfinitiLaunch `Web.config` file, configure the following platform keys to point to the same instance of a web server in the farm as chosen earlier and not to the Load Balancer:
  - `CP_VerifyService.VerifyUser`
  - `INFIN_PlatformService`



# 11. Installing and Configuring Single Sign-on (SSO)

---

## About Changepoint and SSO

You can implement Single Sign-On (SSO) capabilities for Changepoint users.

The following implementation options are available using Secure Token Service (STS):

- SSO using ISAPI
  - Installing SSO using ISAPI (HTTPS optional)
- SSO using WS-Federation
  - Installing SSO using WS-Federation for ADFS implementations (HTTPS required)
  - Installing SSO using WS-Federation for Azure Active Directory implementations (HTTPS required)
- SSO using SAML
  - Installing SSO using SAML for ADFS implementations (HTTPS required)
  - Installing SSO using SAML for PingFederate implementations (HTTP required)
  - Install SSO using SAML for Azure Active Directory implementations (HTTPS required)

The installation instructions for the implementations are available on the Changepoint Community (<https://support.changepoint.com>).

The configuration scripts for ISAPI and application authentication can optionally enable SSL.

**Note:** Information on additional unsupported SSO providers are available as tech notes from your customer support representative or client manager.

### SSL

If you are using SSL with SSO, the SSO scripts enable SSL in the configuration files.

If you are using SSL with application authentication, the application authentication script has an option to enable SSL.

### Configuration of scripts and certificates

In each of the procedures that follow, you run one or more PowerShell scripts. These scripts are used to install required certificates and to modify Changepoint configuration files.

Copy the contents of the `\Changepoint\Utilities\Configuration\` folder on the Changepoint product media to `\<cp_common>\Configuration\`.

### Changepoint add-ins and SSO

The type of authentication used on the Changepoint website determines whether end users are required to sign in when they use an add-in for the first time in a Changepoint session.

Changepoint authentication type	End-users required to sign in
Application authentication	No
ISAPI	No
ADFS 2.0	Yes
SAML 2.0 / ADFS 2.0	Yes

### About application authentication

By default, Changepoint websites are installed with application authentication for end-user sign in. Some websites and features require application authentication, and some require integrated Windows authentication. The following websites and features require application authentication:

- Client Portal website
- Survey Response website

For more information, see "Setting up a survey response website" on page 148.

- Changepoint website accessed by the Report Prerender Service

### Using both application authentication and SSO

You can configure a Changepoint website for either application authentication or SSO, but not both. However, to use both application authentication and SSO, you can do the following:

1. Create two website instances that point to the same Changepoint database.
2. Configure one website instance for SSO and the other for application authentication.

3. Distribute the URLs for the website instances to users according to the type of access you want to give them.

## Implementing application authentication

You can use these procedures to do either of the following:

- revert a website to application authentication after having implemented one of the SSO implementations
- configure Changepoint to use application authentication with SSL

### Configure PowerShell

1. Open a Windows PowerShell prompt.
2. Modify the execution policy:

```
Set-ExecutionPolicy Unrestricted
```

### Stage 1 – Collect configuration parameters

Determine the actual values for the following items. They are used as replacement parameters during configuration.

Parameter	Description
Enterprise_URI	The domain identifier that you use for Changepoint, for example: <code>https://changepoint.abc.corp</code>
Enterprise_Path	The location of the Changepoint web application files. Default: <code>&lt;cp_root&gt;\Enterprise\</code>
RequireHTTPS	Require HTTPS (True/False) Default: <code>False</code> .

### Stage 2 – Execute configuration scripts

Use the information collected in stage 1 to modify the configuration of the websites.

1. Open a PowerShell prompt.

**Note:** If the server has User Account Control enabled, you must open the PowerShell prompt using elevated administrator permissions.

2. Navigate to the Web Service configuration directory, default:

```
<cp_common>\Configuration\Enterprise
```

3. Execute:

```
./Configuration_AppAuth.ps1
```

4. Follow the prompts.

## Authentication configuration scenarios

### Scenario 1

IF a user is authenticated on the domain (for example, a user who is physically in the office and logged on to the domain/network with AD credentials)

AND the IdP site (somename.yourdomain.com) is part of the user's trusted sites in IE

AND the user's AD account is valid/active

AND SSO has been configured on both the Changepoint site and the IdP site

AND the user's UPN is specified in Changepoint

THEN the user will automatically be signed into Changepoint.

### Scenario 2

IF a user is authenticated on the domain (for example, a user who is physically in the office and logged on to the domain/network with AD credentials)

AND the IdP site (somename.yourdomain.com) is part of the user's trusted sites in IE

AND the user's AD account is valid/active

AND SSO has been configured on both the Changepoint site and the IdP site

AND the user's UPN is NOT specified in Changepoint

THEN the user will be presented with the native Changepoint sign-in AFTER they have been authenticated against the IdP.

### Scenario 3

IF a user is authenticated on the domain (for example, a user who is physically in the office and logged on to the domain/network with AD credentials)

AND the IdP site (somename.yourdomain.com) is NOT part of the user's trusted sites in IE

AND the user's AD account is valid/active

AND SSO has been configured on both the Changepoint site and the IdP site

AND the user's UPN is specified in Changepoint

THEN the user will be prompted with an AD login dialog box when accessing Changepoint

The user **MUST** authenticate via the IdP **BEFORE** they are signed into Changepoint.

#### **Scenario 4**

IF a user is authenticated on the domain (for example, a user who is physically in the office and logged on to the domain/network with AD credentials)

AND the IdP site (somename.yourdomain.com) is **NOT** part of the user's trusted sites in IE

AND the user's AD account is valid/active

AND SSO has been configured on both the Changepoint site and the IdP site

AND the user's UPN is **NOT** specified in Changepoint

THEN the user will be prompted with an AD login dialog box when accessing Changepoint

The user **MUST** authenticate via the IdP **BEFORE** they are presented with the native Changepoint sign-in dialog box.

#### **Scenario 5**

IF a user is **NOT** authenticated on the domain (for example, a user who is on the public internet, such as a subcontractor, an employee using a home computer, and so on)

AND SSO has been configured on both the Changepoint site and the IdP site

AND the user's UPN is specified in Changepoint

THEN the user will be prompted with an AD login dialog box when accessing Changepoint

The user **MUST** authenticate via the IdP **BEFORE** they are signed into Changepoint.

#### **Scenario 6**

IF a user is **NOT** authenticated on the domain (for example, a user who is on the public internet, such as a subcontractor, an employee using a home computer, and so on)

AND SSO has been configured on both the Changepoint site and the IdP site

AND the user's UPN is NOT specified in Changepoint

THEN the user will be prompted with an AD login dialog box when accessing Changepoint

The user MUST authenticate via the IdP BEFORE they are presented with the native Changepoint sign-in dialog box.



## 12. Installing and Configuring Other Optional Applications, Features, and Services

---

### Installing the Changepoint online help

You install the English online help from the Changepoint product media. The German and French versions of the online help are on separate media. For more information on installing the German and French online help, contact your client services representative or client manager.

The version of help (PSA or PPM) that appears when launched from the interface is determined by the mode that was selected when the websites were installed. You must install the online help on each Changepoint instance.

1. On the Changepoint product media, run:

```
\Changepoint\Help\Online Help\setup.exe
```

2. Click **Next**, accept the license terms, then click **Next** again.

The **Select Features** screen displays.

3. Select the check boxes for the type of online help to install.
4. Click **Next**.
5. Select the folders for the Changepoint applications (not the Help subfolder) that you are installing. Client Portal help is installed with the Changepoint help.
6. Click **Next**.

When the installation is complete, the **InstallShield Wizard Complete** screen displays.

7. Click **Finish**.
8. If you have multiple Changepoint websites, install the help on the remaining websites.
9. Confirm that the online help launches by signing in to each of the websites and selecting the **Help** menu option.

Once the online help is installed, it becomes part of the Changepoint website and is removed only if the website is uninstalled.

### Installing Changepoint eLearning

This section applies to Changepoint only. You must install the eLearning on each Changepoint website instance.

The eLearning is on its own media, and the installation instructions are in the eLearning release notes for the current release.

Once the eLearning is installed, it becomes part of the Changepoint website and is removed only if the website is uninstalled.

### Setting up the Changepoint Mobile app

The topic covers the setup required to enable users to use the Changepoint Mobile app.

1. Obtain the license for the Access Mobile Application (AMA) security feature, which includes the values for the keys:

- NotificationProvider.Key1
- NotificationProvider.Key2

2. Uncomment the keys and add the values for them into the following configuration files:

- Enterprise\WebApi\web.config
- Changepoint\Changepoint Mail Service\CPMail.exe.config

3. Set up Changepoint and the Changepoint Mail Service to communicate with Amazon Web Services over https (port 443). The SNS access point for Amazon is:

`https://sns.us-west-2.amazonaws.com`

4. Advise users of the following information:

- Changepoint Mobile app is available at the online app stores.
- Changepoint URL or domain, and the user ID and password that are required to sign in to the app.
- Changepoint functionality that is available in the app.

**Note:** The Changepoint Mobile app is designed to be intuitive and easy to use, and it supports a subset of the functionality of the desktop Changepoint application. Therefore there is no end user documentation for the app.

## Setting up mobile access to Changepoint

**Note:** This topic refers to setting up the use of mobile devices to access the Changepoint website. For information about setting up the Changepoint mobile app, see "Setting up the Changepoint Mobile app" on the previous page.

The Changepoint start page automatically detects mobile browsers and redirects them to the mobile login page.

For information on supported mobile devices, see the *Changepoint Product Architecture and Technology Matrix*.

Review the default period of inactivity for the Session Clean Up scheduled job, and change if necessary. For information on the Session Clean Up scheduled job, see "Session Clean Up scheduled job" on page 99.

For information on configuration settings for mobile access, see "Mobile access settings" on page 198.

## Setting up a Client Portal website

If enhanced session management has been enabled in Changepoint Administration, you must create a separate Client Portal website.

1. Use the InstallShield Wizard to create a new Changepoint website on the target server.
  - For information on using the wizard, see "Installing Changepoint using the installer" on page 23.
  - If you already have a Changepoint website on this server, see "Installing multiple Changepoint instances" on page 24.
2. Do not install SSO, but allow the website to default to application authentication.
3. Use the Login Settings utility to configure the database connection settings. For more information, see "About configuring database connection settings" on page 65.
4. Remove the following login file from the root level of the website:

`fclogin.aspx`

5. In IIS, change the default document to the following login file, which is located at the root level of the website:

`fclogin.asp`

6. In Changepoint Administration, do the following:
  - a. Define the Client Portal login URL that will be included in the email notifications (**General > Email Integration**).
  - b. Enable the standard Client Portal email templates (**General > Email Templates**.)
  - c. Set up Client Portal (**Client Portal Management**).
7. To set up the Client Portal website for SSL, see "About setting up Changepoint websites for SSL" on page 48.

### Setting up a survey response website

A survey response website is required to allow clients, customers and internal resources to access the Survey system and respond to surveys.

1. Use the InstallShield Wizard to create a new Changepoint website on the target server.
  - For information on using the wizard, see "Installing Changepoint using the installer" on page 23.
  - If you already have a Changepoint website on this server, see "Installing multiple Changepoint instances" on page 24.
2. Do not install SSO: allow the website to default to application authentication.
3. Use the Login Settings utility to configure the database connection settings. For more information, see "About configuring database connection settings" on page 65
4. Remove the following login files from the root level of the new Changepoint website:  
  
`fclogin.aspx`  
`fclogin.asp`
5. In IIS, change the default document for the new Changepoint website to the following file, which is located at the root level of the new Changepoint website:  
  
`sredir.asp`
6. In Changepoint Administration, define the URL that will be included in the Changepoint email notifications to survey recipients (**General > Email Integration**).
7. To set up the Survey Response website for SSL, see "About setting up Changepoint websites for SSL" on page 48.

## About Microsoft Exchange/Outlook synchronization

The following calendar synchronization options are available:

- Server-side (Exchange) – Server-side synchronization is handled through the Changepoint Exchange Synchronization Service, and supports the synchronization of calendar entries only. Each user must select one synchronization method in the **Preferences** view of Changepoint. No client-side installation is required.
- Client-side (Outlook) – The Changepoint Outlook Tools must be installed on the users' desktops. For more information, see the *User Basics User Guide* or the Changepoint online help. No server-side installation is required.

Changepoint supports running a server-side synchronization and client-side synchronization deployment in one environment. Each user must select one synchronization method in their Changepoint preferences.

Users are discouraged from switching back and forth between the synchronization methods, which can result in duplicate entries. During a switch, the ability to completely restore data is dependent on the synchronization direction selected in the Changepoint Exchange Synchronization service configuration file. The synchronization direction is controlled at the server level and cannot be directly controlled by the end user.

If a user changes from Outlook to Exchange synchronization, the resynchronization repopulates the cleared Changepoint calendar entries based on the Exchange data. If the user changes from Exchange to Outlook synchronization, the cleared Changepoint calendar entries are repopulated based on the Outlook data that is in the date range specified when the batch synchronization is run from Outlook.

### Synchronization direction

Calendar synchronization is either one-way or two-way depending on whether the process is real-time or batch. Calendar synchronization requires that the calendar items in Outlook match the General Calendar Synchronization Options settings (Daily Start Time, Daily End Time and Time Zone) in the **Preferences** view in Changepoint.

## About Microsoft Project Desktop integration

No server-side configuration is required. Users must install the Changepoint Microsoft Project (MSP) COM Add-in on their desktops in order to link a Changepoint project to MSP through the MSP interface. For more information, see the *Changepoint User Basics User Guide* or online help.

### Configuring batch printing

You can create different print directories and use different printers for different workgroups by using the `htmlprint` utility. All invoices, cross charges, and credit notes generated by the batch printing report will be saved to the appropriate directory according to the workgroup of the resource who runs the report.

**Note:** The BatchPrint directory is automatically installed if you selected the **Complete** option when installing Changepoint.

1. If you upgraded Changepoint, delete the BatchPrint directory.
2. Install the BatchPrint directory on the web server by doing one of the following:
  - Use the Changepoint installer to install BatchPrint (**Custom** > **Select Features** page > **Batch Print** check box).
  - Copy the BatchPrint directory and its contents from the Changepoint product media:

```
\Changepoint\Manual Install\Components\BatchPrint
```

3. On the web server, run:

```
<cp_root>\BatchPrint\htmlprint.exe
```

4. Review the license, and then close the Bersoft HTMLPrint window.

The `htmlprint.ini` file is added to the BatchPrint directory.

5. Open the `htmlprint.ini` file:

- a. Record the information in the [Printers] section, for example:

```
[Printers]
0=\\printserver\printerA
1=\\printserver\printerB
2=local printer
```

- b. Close the file.

6. Configure the database connection settings for the Batch Print configuration file (`PrintInvoices.exe.config`) using the Login Settings utility (`Login Settings.exe`).

For more information, see "Configuring database connection settings" on page 65.

7. Open the `PrintInvoices.exe.config` file in the BatchPrint directory, and locate the following entry.

```
<add key="PrintServername" value=""/>
```

In the `value` attribute, insert the printer name (from the `[Printers]` section) for the printer that you want to use as the default printer for batch printing. For example:

```
<add key="PrintServername" value="\\printerserver\printerA"/>
```

8. To set up different print directories and use different printers for different workgroups:

- a. Under the `BatchPrint` directory, create subdirectories for the workgroups. Do not use spaces in the subdirectory names. For example:

```
<cp_root>\BatchPrint\Finance  
<cp_root>\BatchPrint\Sales  
<cp_root>\BatchPrint\Marketing
```

- b. For each workgroup subdirectory, create a `utility` subdirectory for the batch print files for the workgroup. For example:

```
<cp_root>\BatchPrint\Finance\utility  
<cp_root>\BatchPrint\Sales\utility  
<cp_root>\BatchPrint\Marketing\utility
```

- c. Set the permissions on the workgroup subdirectories to allow new files to be added and existing files to be deleted.
- d. Copy the files from the `BatchPrint` directory into each of the `utility` subdirectories.
- e. Open the `PrintInvoices.exe.config` file in each `utility` subdirectory. Set the `PrintServername` key to the name of the printer (from the `htmlprint.ini` file) for the workgroup. For example:

```
<add key="PrintServername" value="\\printerserver\printerB"/>
```

- f. Save the file.

9. In Changepoint Administration, set up batch printing:

- a. Assign the `BatchPrint` directory to workgroups.
- b. Set up access to the Batch Printing Report.

## About installing Changepoint APIs

For information about installing the COM API and Web Services API, see the *Changepoint API Installation Guide*.

### Installing the connection string decryption utility

1. Uninstall any previous versions of the utility using Windows Control Panel.
2. Run the following file from the 2017 SP2 product media:

```
\Changepoint\Utilities\Connection String Decryption\setup.exe
```

3. Follow the prompts.
4. In the **Setup Status** screen, click **Finish**.

The installation location now contains:

```
Changepoint.CommonServices.Crypto.dll  
CPPubUtility.dll
```

### Uninstalling the Connection String Decryption Utility

To uninstall the connection string decryption utility, use Windows Control Panel.

### Browser settings for end users

Ensure that users configure their web browsers as follows:

- Browser popup settings – Browsers must be set to allow pop-ups from the Changepoint website URLs.
- Internet Explorer Compatibility mode – compatability mode in Internet Explorer must be disabled by clearing the **Display intranet sites in Compatibility View** check box.
- Browser cache – users must clear their browser cache before logging into an upgraded version of Changepoint. If the browser has the option to preserve data from websites that have been added to favorites, ensure that the **Favorites website data** is cleared.



## 13. Upgrading to Changepoint 2017 SP2

---

### About the upgrade

#### Supported upgrade paths

You can upgrade to Changepoint 2017 SP2 from the following versions:

- Changepoint 2017
- Changepoint 2017 SP1

The upgrade to Changepoint 2017 SP2 replaces *all website files*, but the Changepoint websites and configuration files (Web.config and Global.asa) are retained as-is.

#### Upgrade overview

The upgrade process includes:

1. Ensuring that you meet all of the requirements as detailed in "Installation Requirements and Preparation" on page 13.
2. Preparing for the upgrade.
3. Upgrading the Changepoint web and database servers.
4. Upgrading the optional Changepoint components.

#### Preparing for the upgrade

Unless otherwise stated, information in this chapter concerning Changepoint websites applies to websites that were set up for Changepoint, Client Portal, and Survey Response.

#### Assess the impact on customizations and product extensions

Review your customizations prior to upgrading, and save and/or modify them as necessary.

Upgrading to Changepoint 2017 SP2 replaces all website files. Therefore it is strongly recommended that you review the list of files in the applicable *Differences* documents to assess whether your customizations and product extensions are affected by the upgrade. All customizations to existing website pages must be reapplied after the upgrade.

All customizations made to SQL objects (tables, stored procedures) will be affected.

**Warning:** If it appears that any of the code associated with a product extension is at risk, contact your Changepoint customer representative before upgrading. Failure to do

so may result in the files being overwritten or deleted, and the extended functionality failing.

### Perform backups

Back up the database and web servers before proceeding with the upgrade.

### Upgrade in a test environment first

It is strongly recommended that you upgrade your production Changepoint database and websites in a test environment before upgrading the production environment. If any errors occur, report them to Changepoint immediately. Do not create test environments on your production servers.

If the test environment and production environment use the same version and the same edition of SQL Server, back up your database and full text catalogs on the production environment and restore them on the test environment. You can then run the upgrade in the test environment.

If the testing environment and production environment use different versions or different editions of SQL Server, then follow the database porting instructions in the "Porting the Changepoint database" on page 179. After porting the database to the test environment, run the upgrade in the test environment.

### Upgrading multiple Changepoint instances on the same server

If you have more than one Changepoint instance on a server, you must upgrade all instances.

**Warning:** Changepoint will not function correctly if different versions are installed on the same server.

### Reinstalling Changepoint components

If you use the following components, you must reinstall them from the Changepoint 2017 SP2 media:

- Windows services, including the Integration Framework services
- Changepoint online help
- Changepoint COM and Web Service API (API media)
- Changepoint Transport Tool (Transport Tool media)

## Intelligent Forms installation parameters

Before you start installation, determine the values in the following table. You are prompted for this information during installation.

Information needed	Notes	Your installation value
<b>Destination folders for application files</b>		
Destination Location (Intelligent Forms web files)	Default: <cp_root>\Intelligent Forms\Websites\	
Destination Location (Web Services API files)	Default: <cp_root>\API\CP Web Services\	
Destination Location (Redis cache service)	<cp_root>\Redis\	
<b>Website names and ports</b>		
Name of the Intelligent Forms application pool	Default: CPInfiniti	
Changepoint URL	URL, including the protocol (http or https) for end users to access Changepoint.	
<b>Destination locations for database files</b>		
Destination Location (Intelligent Forms database file - InfinitiDB.mdf)	Default: The same location as the Changepoint.mdf database file.	
Destination Location (Intelligent Forms database log file - InfinitiDB.ldf)	Default: The same location as the Changepoint database log file.	
<b>Database login information</b>		

Information needed	Notes	Your installation value
Login ID (SQL Server)	sa	
Password (SQL Server)	password for the sa account	
Database Name	Recommended default: Changepoint	
User ID and password for the SQL account that will be used for the database connection	Used in the Login Settings (Connection settings) setup.	
Intelligent Forms database name	Recommended default: InfinitiDB	

## Identifying nonstandard database objects

You can create a database inventory report that identifies all nonstandard database objects that exist in your current Changepoint database. Nonstandard database objects include all database objects (table, view, stored procedure, functions, trigger, index, primary and foreign key constraints) that were created by customizations, accelerators, and third-party integrations.

The database inventory report allows you to catalog existing customizations in the current database, identify the affected customizations, and plan the migration work for the upgrade.

**Note:** The database inventory report does not replace any change tracking procedures or processes that you may already have in place to track customizations, accelerators, or third-party integrations.

### Creating the database inventory report

To create the database inventory report, execute the following query against the Changepoint database:

```
SELECT * FROM CPObjectsModified
```

The result of the query includes the following:

- custom database objects show as **Added**.
- standard objects that no longer exist show as **Deleted**.

- if a customization has been made directly to a standard database object, the object is not identified as a customized object in the report.
- the report does not report on all CHECK\_CONSTRAINTS.

## Pre-upgrade steps

### 30 to 35 days before upgrading

(Web server) Change the content expiry of the Enterprise folders to expire in 1 day:

```
\images  
\css  
\Help  
\External\Help  
\External\images  
\Js
```

### Changing content expiry settings and enabling caching of static files

You set content expiry in IIS Manager by changing the expiry options of the HTTP Response Headers for the Enterprise websites.

1. In IIS Manager, expand **servername** > **Sites** > **Enterprise**.
2. Select the folder.
3. In the **Home** screen, double-click the **HTTP Response Headers** icon.
4. Select **Actions** > **Set Common Headers**.
5. Change the settings as required.
6. Click **OK**.

### One to two weeks before upgrading

1. Send an email message to users notifying them about the upgrade.
2. If you plan to install Intelligent Forms for the first time, determine the values for the installation parameters. For more information, see "Intelligent Forms installation parameters" on page 155.

### One day before upgrading

(Web server) The day before the upgrade, change the content expiry setting to **Expire Immediately** for the Enterprise folders. For more information, see the "Changing content

expiry settings and enabling caching of static files" section on page 157.

**Note:** Changing this setting removes the need for users to clear their browser cache before signing into Changepoint after the upgrade.

### Immediately before upgrading

3. Apply the applicable pre-upgrade patches according to the instructions in the patch release notes.
4. In Changepoint Administration, lock Changepoint.
5. (Web server) Do the following:
  - a. Back up the Changepoint files.
  - b. If you have implemented single sign-on for Changepoint, and you have also implemented Intelligent Forms or the Changepoint Integration Framework (Salesforce.com), back up the `<cp_root>\API\CP Web Services\Web.config` file so that you have a copy for reference purposes after upgrading.
  - c. Disable IIS caching of static files. For more information, see "Changing content expiry settings and enabling caching of static files" on page 157.
  - d. In IIS Manager, stop the Changepoint websites (Changepoint and Report Designer) that you are upgrading.
6. (Database server) Do the following:
  - a. Stop all scheduled jobs from running while you are performing the upgrade.
  - b. Back up the Changepoint database.
  - c. If required, port the Changepoint database.
  - d. Back up the Cognos content store database.
  - e. Back up the Infiniti database.
7. If you use the Integration Framework, create backup copies of the following files:
  - `adapter.xml` file in the Changepoint Communication Dispatcher Service\configuration folder

- `Changepoint.IntegrationServices.WindowsServices.CommunicationDispatcher.exe.config` file from the Changepoint Communication Dispatcher Service folder
- transformation files in the Changepoint Data Mapper Service\Configuration folder
- `CPEExportPublishingService.exe.config` file from the Changepoint Export Publishing Service folder.

## Upgrading the Changepoint servers using the installer

**Note:** If you are upgrading the web server and database server separately, it is best to upgrade the database server first because it is easier to restore the database than it is to roll back the website files.

1. Follow the instructions in the "Pre-upgrade steps" section on page 157.
2. Copy the contents of the Changepoint product media to the server.
3. From the `\Changepoint\Setup\` directory on the server, run:  
`setup.exe`
4. Follow the prompts. A confirmation message appears after a successful upgrade.
  - If you are installing Intelligent Forms for the first time, refer to the installation parameters in "Intelligent Forms installation parameters" on page 155.
  - If you are upgrading Intelligent Forms:
    - only the website is updated (there is no change to the Infiniti database)
    - do not change the Changepoint URL or Web.config user
  - Run the `LoginSettings.exe` only if you need to configure database connections

5. Check the log file in the following folder for errors and warnings:

`C:\Program Files (x86)\Changepoint\Changepoint\InstallLog`

**Note:** The log file is always placed in the above location regardless of the root path of the Changepoint installation.

6. If you have multiple web server or database server installations, repeat the upgrade procedure on each server.
7. Complete the post-upgrade instructions. For more information, see the "Completing the upgrade" section on page 160.

## Upgrading the Changepoint database server manually

1. Copy the contents of the following folder on the Changepoint product media to a location on the SQL server that contains the database:

```
\Changepoint\Manual Install\Upgrade\
```

2. Remove the read-only attribute on the copied files, if set.
3. Run the SQL import utility from the server location:

```
SQLImport.exe
```

The **Changepoint SQL Update Utility** dialog box appears.

4. Complete the following fields:
  - a. In the **MigrationDll** folder, select **Changepoint.DatabaseServices.DBMigrations.dll**, and then click **Open**.
  - b. In the **SQL Server** field, enter the name of the SQL server.
  - c. In the **Database** field, enter the name of the Changepoint database.
  - d. In the **Login ID** field, enter the SQL server account for the Changepoint database.
  - e. In the **Password** field, enter the password.
5. Confirm that the upgrade was successful by checking that the `VersionHistory` table on the database server contains the following entry:

```
Upgrading Changepoint database with migration package 18.02.083.000 completed  
Configuration of CPTempDB database (Changepoint_CPTempDB) completed successfully
```

## Upgrading the Infiniti database manually

1. From the `\Enterprise\Changepoint\Intelligent Forms\Upgrade` folder on the product media, copy the `InsertResourceActionIntoInfinitiDB.sql` file to a local folder on the database server.
2. Execute `InsertResourceActionIntoInfinitiDB.sql` against the Infiniti database.

## Completing the upgrade

After you have upgraded the database and web servers, you must complete the upgrade by applying patches, restoring customizations, running scheduled jobs, and so on. For more information see:



1. "Completing the upgrade on the database server" on page 161.
2. "Completing the upgrade on the web servers" on page 164.
3. "Completing the installation of Intelligent Forms" on page 162.
4. "Upgrading Changepoint Windows services" on page 166.
5. Upgrade the following optional components as required:
  - "Upgrading the online help" on page 167
  - "Setting up the Changepoint Mobile app" on page 167
  - "Upgrading the Changepoint API" on page 168
  - "Upgrading the Integration Framework" on page 170
  - "Upgrading to Cognos Analytics" on page 171
  - "Upgrading the toolkits" on page 170
  - "Upgrading the archive database and websites" on page 170
6. Advise users that they must delete their browser history before signing into Changepoint for the first time after the upgrade.

## **Completing the upgrade on the database server**

1. Apply the applicable patches for the service pack, according to the instructions in the patch release notes.
2. Restore and test customizations (custom SQL code, accelerators, and extensions).
3. Configure the CPEffectiveDates scheduled job for access to the Redis cache. For more information see "Configuring the CPEffectiveDates scheduled job for access to the Redis cache" on page 162.
4. To prevent time entry on summary tasks, see "Running the script to prevent time entry on summary tasks" on page 163.
5. To optimize performance, follow the performance optimization recommendations in "Optimizing Performance" on page 183.

6. Adjust the Changepoint and tempdb databases to the limits and settings according to your internal administration policies. The size of the databases may have increased due to the processing done during the upgrade.

7. Run the following scheduled jobs:

- a. Reindex and Update Statistics daily
- b. Chained scheduled jobs by starting the Update Time Rate job.

**Note:** It is recommended that you run the scheduled jobs immediately after upgrading, and before end users sign in.

**Tip:** The chained scheduled jobs may take a long time to run. Record the duration of the job in the test environment so that you can plan for the initial scheduled job run on the production database.

8. If you dropped custom full-text catalogs before the upgrade, recreate the catalogs.
9. Restart the database server.

### Configuring the CPEffectiveDates scheduled job for access to the Redis cache

The CPEffectiveDates scheduled job requires access to the Redis cache that is used by Changepoint because the scheduled job performs work that triggers certain cache region data evictions. Because the CPEffectiveDates scheduled job can be installed independently from Changepoint (possibly on a different location than the web server), you must configure the Redis cache manually.

In the `CPEffectiveDates.exe.config` file, edit the following entries in the `<configuration>` `<appSettings>` section to match the values that are in the `Enterprise\Web.config` file:

```
<add key="cache.Enabled" value="true" />
<add key="cache.Password"
value="6ed18d5c7df4439409d65eba624de2aeb7aea1e3b745987b9cd81d6e052a01f8" />
<add key="cache.Servers" value="cacheServer:Redis Cache port number" />
```

**Note:** The server that hosts the CPEffectiveDates scheduled job must allow outbound firewall access to the Redis cache port number.

### Completing the installation of Intelligent Forms

1. Configure the database connection settings for Intelligent Forms. For more information, see:

- "Database connection settings for Intelligent Forms" on page 76
  - "Database connection settings for Intelligent Forms (Changepoint Data Services, Manage, and Produce" on page 77
2. Configure Intelligent Forms according to the instructions in "Configuring Intelligent Forms" on page 133.

**Note:** It is not necessary to apply the patch.

## Running the script to prevent time entry on summary tasks

The default behavior for Changepoint 2017 SP2 is to allow time entry for summary tasks and their subtasks.

If you want to prevent time entry for summary tasks, you can run a script to lock task assignments for all summary tasks or for specific entities.

To lock all task assignments for all summary tasks

```
EXEC LockAssignmentFromSummaryTask @Lock=0x1
```

To lock all task assignments for a specific entity

You can lock the task assignments for one or more summary tasks in a project, engagement/initiative or company) by specifying only the parameter for the entity. If more than one parameter is specified, the parameter for the lowest level entity is used, and the others are ignored.

```
@Lock BIT = 0x1,  
@SummaryTaskId UNIQUEIDENTIFIER = NULL,  
@ProjectId UNIQUEIDENTIFIER = NULL,  
@EngagementId UNIQUEIDENTIFIER = NULL,  
@CustomerId UNIQUEIDENTIFIER = NULL
```

For example, if you run the script as follows, only the task assignments under the specified summary task will be locked.:

```
EXEC LockAssignmentFromSummaryTask @Lock=0x1  
, @SummaryTaskID = 'EE8CFFBA-05DA-4C8A-9BA5-8DB5F929A361'  
, @ProjectID = 'C8999EF9-06FB-4279-A7C9-25CF7C46B84A'
```

If you want to lock all assignments for all summary tasks on that project, specify only the project ID as follows:

```
EXEC LockAssignmentFromSummaryTask @Lock=0x1
```

```
, @ProjectID = 'C8999EF9-06FB-4279-A7C9-25CF7C46B84A'
```

### Completing the upgrade on the web servers

1. Apply the applicable patches according to the instructions in the patch release notes.
2. Restore and test customizations (asp pages and extensions).
3. For optimum performance, the resource scheduling worksheet (RSW) has default values set for the following keys. To increase the limit, change the value in the

Enterprise\WebAPI\Web.config file for the following setting:

```
<add key="ResourceSchedulingWorksheet.DemandItemLimit" value="300" />
<add key="ResourceSchedulingWorksheet.ViewColumnsLimit" value="50" />
<add key="ResourceSchedulingWorksheet.PastWorkingDaysLimit" value="90" />
```

**Note:** For the DemandItemLimit, the maximum value is 1000. Keep in mind that it is best to use as low a value as possible that provides good performance in RSW.

4. To hide the resource management worksheet (RMW) or project worksheet so they are not available from the Changepoint user interface, change the settings in the

Enterprise\Web.config file.

- To hide the resource management worksheet (RMW), set the value for the following setting to "false":

```
<add key="ResourceManagementWorksheet.EnableManagementWorksheet" value="false" />
```

- To hide the resource scheduling worksheet RSW or project worksheet, set the value for the corresponding setting below to "false":

```
<add key="ResourceSchedulingWorksheet.EnableSchedulingWorksheet" value="false" />
<add key="ProjectWorksheet.EnableProjectWorksheet" value="false" />
```

- To show the resource scheduling worksheet (RSW) or project planning worksheet (PPW), if hidden in a previous release, set the value for the corresponding setting to "true."

```
<add key="ResourceSchedulingWorksheet.EnableSchedulingWorksheet" value="true" />
<add key="ProjectPlanningWorksheet.EnableProjectPlan" value="true" />
```

5. The upgrade creates a new <cp\_root>\API\CP Web Services\Web.config file and copies the SQL setting string for the API from the original file.

You must reconfigure the settings in the new file if you had previously implemented single sign-on for Changepoint, Intelligent Forms or the Changepoint Integration Framework

(Salesforce.com), or have enabled WSE, and so on. For the previous settings, refer to the copy of the file that you backed up before upgrading.

6. To optimize performance, follow the performance optimization recommendations in "Optimizing Performance" on page 183.
7. If you have enabled Request Filtering on the Changeport website or use tools to restrict HTTP verbs in HTTP traffic, you must ensure that the following HTTP verbs *are not set* to "Block" or "Deny":
  - PUT
  - PATCH
  - DELETE

For more information, see "Troubleshooting the upgrade" on page 175.

8. Restart the Changeport website.
9. Sign into Changeport Administration, and do the following:
  - a. If you purchased additional licenses, import the licenses (**Tools > License Management**).
  - b. Check the server integration settings (**General > Server Integration**).
10. Restart all websites and check that you can sign in to each website.
11. Restore the content expiry settings of the Changeport folders to the values before the upgrade:

```
\images
\css
\Help
\External\Help
\External\images
\Js
```

For more information, see the "Changing content expiry settings and enabling caching of static files" section on page 157.

12. Enable IIS caching of static files.
13. Restart IIS.
14. Restart the Redis cache service.

## Upgrading Changepoint Windows services

The following standard Changepoint Windows services have been updated:

- Changepoint Email Notification Service
- Changepoint Exchange Synchronization Service
- Changepoint Mail Service
- Changepoint Report Prerender Service
- Changepoint Report Scheduler Service

The following Windows services for Integration Framework have been updated:

- Changepoint Data Mapper Service
- Changepoint Communication Dispatcher Service
- Changepoint Export Publishing Service

For more information about installing and configuring the Changepoint Windows services, see "Installing Changepoint Windows Services" on page 51.

1. For each of the Windows services that you use, you must do the following:
  - a. Create a backup copy of the configuration file for the service.
  - b. Uninstall the service using Windows Control Panel.
  - c. Reinstall the service from the Changepoint 2017 SP2 media.
2. For each of the standard Changepoint Windows services:
  - a. Configure the database connection settings.
  - b. For the Changepoint Mail Service only: If you are not planning to enable the Changepoint Mobile app, then you must comment out the following keys in the configuration file for the service(CPMail.exe.config):

```
< add key="NotificationProvider.Key1" value="" />  
< add key="NotificationProvider.Key2" value="" />
```

3. For the Changepoint Communication Dispatcher service:
  - a. Copy the following key from the <appSettings> section of the backup configuration file, and replace the key in the <appSettings> section of the new configuration file:

```
< add key="Microsoft.ServiceBus.ConnectionString" ... />
```

- b. Copy the Adapter.xml file back to the Changepoint Communication Dispatcher Service\Configuration\ folder.

4. For the Changepoint Data Mapper Service:

- a. Copy the following key from < appSettings > section of the backup configuration file, and then replace the key in the < appSettings > section of the new configuration file:

```
< add key="Microsoft.ServiceBus.ConnectionString" ... />
```

- b. Copy the back up copy of the configuration files to the ChangepointDatamapperService\Configuration folder.

5. For the Changepoint Export Publishing Service:

- a. In the < appSettings > section of the backup copy of the configuration file, copy the following key and replace the same key in the new configuration file.:

```
< add key="Microsoft.ServiceBus.ConnectionString" ... />
```

- b. In the < appSettings > section of the backup configuration file, copy the following key and then replace the same key in the new configuration file:

```
< add key="SQLSettings" ... />
```

## Upgrading the online help

Install the online help files from the Changepoint 2017 SP2 media. For more information, see "Installing the Changepoint online help" on page 145.. It is not necessary to uninstall the previous help files.

There are no eLearning lessons available.

## Setting up the Changepoint Mobile app

The topic covers the setup required to enable users to use the Changepoint Mobile app.

**Note:** The Mobile app requires that Changepoint be configured with SSL using one of the following authentication modes:

- SSO using ADFS
- SSO using SAML

- Changepoint Application Authentication

For information about the supported platforms, see the *Changepoint Product Architecture and Technology Matrix*.

1. Obtain the license from Changepoint Canada ULC for the Access Mobile Application (AMA) security feature, which includes the values for the keys NotificationProvider.Key1 and NotificationProvider.Key2.
2. Add both keys to the following configuration files according to the instructions provided with the keys:

- Enterprise\WebApi\web.config
- Changepoint\Changepoint Mail Service\CPMail.exe.config

3. Set up Changepoint and the Changepoint Mail Service to communicate with Amazon Web Services over https (port 443). The SNS access point for Amazon is: `https://sns.us-west-2.amazonaws.com`.

**Note:** This might require changes to firewall settings.

4. Advise users of the following:
  - Changepoint Mobile app is available at the online app stores.
  - Changepoint URL or domain, and the user ID and password that are required to sign in to the app.
  - Changepoint functionality that is available in the app.

**Note:** The Changepoint Mobile app is designed to be intuitive and easy to use, and it supports a subset of the functionality of the desktop Changepoint application. Therefore there is no end user documentation for the app.

### Upgrading the Changepoint API

1. Uninstall the previous version of the Changepoint API.
2. Create an application pool as follows:



<b>Name</b>	<API application pool name>
<b>.NET Framework version</b>	v4.0.30319
<b>Managed pipeline mode</b>	Integrated
<b>Enable 32-Bit Applications</b>	True
<b>Identity</b>	ApplicationPoolIdentity

3. Create an empty website as follows:

<b>Site Name</b>	<API website name>
<b>Application Pool</b>	<API application pool name>
<b>Physical Path</b>	C:\Program Files\Changepoint\<API website name>
<b>Authentication</b>	Only Anonymous Authentication

4. If you are installing the WCF API, configure the website to *not* use SSL.
5. Install the Changepoint 2017 SP2 version of the API using the website that you created.

**Note:** The virtual directory name is hard coded as CPWebService.

For more information, see the *Changepoint 2017 SP2 API Installation Guide*.

6. If you installed the WCF API on a server that does not have WSE installed, you must do the following:

- a. Open web.config.
- b. Find the three instances of the following comment line:

```
<!-- Remove the following element if you are using WCF services and are not installing Web
Service Enhancements (WSE) -->
```

- c. Remove or comment out the element that follows each instance of the comment line:

```
<section name="microsoft.web.services2" ... >
<webServices>
<microsoft.web.services2>
```

**Note:** The <webServices> element is a child of <system.web>.

### Upgrading the Integration Framework

To upgrade the Integration Framework, you must upgrade the Windows services that were updated in this release. For more information, see "Upgrading Changepoint Windows services" on page 166

#### Upgrading a Salesforce.com integration

To upgrade a Salesforce.com integration, do the following:

1. Create a backup copy of the configuration files:

```
ExternalEndPoint\Web.config  
ExternalEndPoint\Configuration\Adapter.xml
```

2. On the SFDC Integration Toolkit media, copy the contents of the `Salesforce\ExternalEndPoint` folder, and then paste the contents under the `ExternalEndPoint` folder.
3. Move the backup copy of the `ExternalEndPoint\Configuration\Adapter.xml` file back to the `ExternalEndPoint` folder.
4. Copy the following key from the back up copy of the `ExternalEndPoint\Web.config` file, and then paste it to the same location in the new `ExternalEndPoint\Web.config` file.

```
<add key="Microsoft.ServiceBus.ConnectionString" value="Endpoint=sb://[your  
namespace].servicebus.windows.net;SharedSecretIssuer=owner;SharedSecretValue=[your  
secret]" /></appSettings>
```

### Upgrading the toolkits

#### Upgrading the Transport Tool

To upgrade the Transport Tool, you must uninstall the previous version and then reinstall from the 2017 SP2 product media.

For more information, see the *Changepoint 2017 Transport Tool User Guide*.

### Upgrading the archive database and websites

If you have an archive database and websites, follow the same procedure as for upgrading the Changepoint database and websites. When prompted, substitute the details for the archive database and websites in place of the Changepoint database and websites.

**Note:** The archive environment must always be at the same patch level as the production environment, otherwise the Archive scheduled jobs might fail.

1. Upgrade the archive database and websites.
2. If the archiving solution is on a SQL Server 2016 environment:
  - a. Copy all files except the `Data Archiving.ini` file from the following folder on the Changepoint media:

```
\Changepoint\Manual Install\Data Archiving
```

**Note:** The `Data Archiving.ini` file contains the current configuration settings.

Paste the files into the `Data Archiving` folder on the archive environment.

3. If the archiving solution is on a SQL Server 2017 environment:
  - a. Obtain the 18.02.089.000 general patch.
  - b. Copy the `Data Archiving 2017.dtsx` and `GenerateEmptyArcDestDB 2017.dtsx` packages from the 18.02.089.000 general patch package.
  - c. Paste the files into the `Data Archiving` folder on the archive environment.

### Configuring the archive database

If you have a website set up to access the archive database, execute the following commands against the archiving database:

```
exec DBM_SetupCPTempDB
exec DBM_SetupCPExtended
exec DBM_EnableSqlDependency (with the user used in the Web.config files)
```

## Verifying component versions

After you upgrade to Changepoint 2017 SP2, the version for all components is: 18.02.083.000.

## Upgrading Cognos

### Upgrading to Cognos Analytics

You can upgrade to Cognos Analytics 11.1 on the following Changepoint versions:

- Changepoint 2017 (Cognos 10)
- Changepoint 2017 SP1 (Cognos Analytics 11)

Upgrade notes for installing Cognos Analytics:

- The Cognos gateway is no longer required. Only the Cognos application tier is required. The Changepoint installer removes the Cognos gateway during the upgrade.

- For the upgrade from Cognos 10, the old Cognos c10 folder might not be removed by the installer completely. It is recommended that you delete the old Cognos folder after the upgrade, or uninstall Cognos before the upgrade and then manually delete the remaining folders and files.

Upgrade notes for using Cognos Analytics:

- The Cognos Analytics 11.x user interface is very different from the Cognos 10.x user interface. Users will need to familiarize themselves with the new interface. The same functionality and options are available, but many of them are in a different location in the new interface.
- Adding links from reports to Changepoint profile pages uses a different methodology for interactive reports, which are new in Cognos Analytics 11. Refer to the *Changepoint-Cognos Reference Guide* for more details.

Upgrading Cognos includes the following steps:

1. Upgrading Changepoint.
2. Backing up the content store database.

**Note:** The recommended method for backing up a content store database is to create a deployment archive by using IBM Cognos Administration. For more information, see [Creating a deployment archive](#) on the IBM Knowledge Center website

3. Backing up the Cognos startup configuration file:

- Cognos 10: C:\Program Files\ibm\c10\configuration\cogstartup.xml
- Cognos 11:

C:\Program Files\ibm\cognos\analytics\configuration\cogstartup.xml

**Note:** You might want to back up this file and other configuration files and use the configuration data with the new version.

4. Backing up the Cognos images folder. If the existing reports have images, back up the images folder:

- Cognos 10: C:\Program Files\ibm\cognos\c10\webcontent\samples\images.
- Cognos 11:

C:\Program Files\ibm\cognos\analytics\webcontent\samples\images

5. Installing Cognos Analytics (be sure to use the same installation folder as the previous installation):
  - a. Close the IBM Cognos Configuration panel.
  - b. Stop the Cognos service.
  - c. For Cognos 10, do the following:
    - "Stage 2. Installing the Cognos Application Tier" on page 110
    - "Stage 3. Configuring the Cognos Application Tier" on page 111
    - "Stage 4. Installing the Cognos web components" on page 114
    - "Stage 6. Assigning Changepoint security features for access to Cognos functionality" on page 116(where applicable)
  - d. For Cognos 11, do the following:
    - "Stage 2. Installing the Cognos Application Tier" on page 110
    - "Stage 4. Installing the Cognos web components" on page 114
    - "Stage 6. Assigning Changepoint security features for access to Cognos functionality" on page 116(where applicable)
  - e. Open the IBM Cognos Configuration panel. The message "Older versions of configuration files were found. The configuration files have been upgraded to the latest version" appears.
  - f. Click **OK**, and wait for configuration data to be loaded.
  - g. Click the **Start** button to start the Cognos Service.
  - h. Confirm that you want to save the changes by clicking **Yes** in the confirmation message that appears.
6. Copy the images from existing reports (that you backed up) to the images folder on the Cognos Application Tier server:  
  
`c:\Program Files\ibm\cognos\analytics\webcontent\bi\samples\images`
7. Remove the **Everyone** role from the following capabilities:
  - Data sets
  - Upload files
  - Web based modeling

8. Ensure that the **Everyone** role has been removed from the Cognos System Administrators role.
9. If Business Author licenses are to be granted full reporting capabilities, add the **Changepoint Query Users** role to the Cognos **Authors** role.
10. By default, Cognos portlets and portals open in a new browser window. However, you can configure Cognos portlets and portals to open inline. In the `Enterprise\Web.config` file, set `Cognos.IE.LaunchPortletsInNewWindow` to “false.”
11. After you have verified that you do not require any files from the previous version, delete the Cognos IBM directory:  
  
`C:\Program Files\IBM\cognos\c10`
12. Upgrade the Changepoint-Cognos Sync Utility and import the new base data model. For more information, see "About the Changepoint-Cognos Sync Utility " on page 120.
13. Restart Cognos service on the Cognos Application Tier server.
14. Upgrade the report specifications in bulk according to the instructions in the following article:

[https://www.ibm.com/support/knowledgecenter/en/SSEP7J\\_11.1.0/com.ibm.swg.ba.cognos.inst\\_cr\\_winux.doc/t\\_inst\\_upgradingrepspecs.html](https://www.ibm.com/support/knowledgecenter/en/SSEP7J_11.1.0/com.ibm.swg.ba.cognos.inst_cr_winux.doc/t_inst_upgradingrepspecs.html)

### Manually uninstalling Cognos

The installer will uninstall the previous Cognos instance, but you can uninstall Cognos Analytics manually from each of the locations where it has been installed:

- Application Tier server
  - Cognos Gateway on each Changepoint web server
  - Sync Utility client workstation
1. On each of the servers, go to the following folder:
    - Cognos 10: `C:\Program Files\ibm\cognos\c10\uninstall`
    - Cognos 11: `C:\Program Files\ibm\cognos\analytics\uninstall`
  2. Uninstall Cognos Analytics by double-clicking:  
  
`Uninstall IBM Cognos.exe`
  3. After you have verified that you do not require any files, delete the Cognos IBM directory:

- Cognos 10: C:\Program Files\ibm\cognos\c10
- Cognos 11: C:\Program Files\ibm\cognos\analytics

## Troubleshooting the upgrade

### Execution timeout error in RSW.

If you are getting timeout errors in RSW, add and configure the `CommandTimeOut` setting in the `Enterprise\WebApi\Web.config` file.

Add the following key to the `appSettings` section of the `Enterprise\WebApi\Web.config` file. Ensure that the value is greater than 30 (seconds).

```
< add key="CommandTimeOut" value="300" />
```

### Changepoint Mail Service error in event log

If you enabled the Changepoint Mail Service but did not enable the Changepoint Mobile app, then you must comment out the following keys in the service configuration file (`CPMail.exe.config`):

```
< add key="NotificationProvider.Key1" value="" />
< add key="NotificationProvider.Key2" value="" />
```

### Access to the path '...\RP-STG\_ADFS\Web.config' is denied" error when signing into Changepoint

If your environment is configured for single sign-on (SSO) using WS-Federation (ADFS), you must grant the `IIS_IUSRS` group **Modify** access to the `Enterprise\RP-STG_ADFS\Web.config` file. For more information, see [Configuring Single-Sign On \(SSO\) using WS-Federation after upgrading](#).

### Cognos report in a portal will not load

The report version may be out of date. Regenerating the report in Cognos Analytics will update the report version.

### HTTP 403 error

#### Project Planning Worksheet fails to save Preferred resources cannot be edited

If you have enabled Request Filtering on the Changepoint website or use tools to restrict HTTP verbs in HTTP traffic, you must do the following:

1. Add the following verbs to the `[AllowVerbs]` section:
  - PUT

- PATCH
  - DELETE
2. Remove the same verbs from the [DenyVerbs] section.

Blocking these verbs can result in unexpected HTTP errors and functional issues in Changepoint. Changepoint deploys the Changepoint REST API internally (and externally as an option) to enable mobile app support and some internal product functionality. The REST API uses the HTTP verbs in its transactions.

### Errors in the Changepoint Installer.log

**\* WARNING: add app pool (IIS APPPool\<website>\_AppPool) in [Performance Monitor Users] group failed. Please add the user manually.**

**\* WARNING: add app pool (IIS APPPool\<website>\_AppPool) in [Performance Log Users] group failed. Please add the user manually.**

or

### Server error in browser

**Server Error in '/' Application.  
Access to the registry key 'Global' is denied.**

The application pools of the Enterprise and Report Designer websites and the Enterprise REST web application must be included as members of both the **Performance Monitor Users** and the **Performance Log Users** groups.

You can manually add the <website>\_AppPool to the Performance Monitor Users group and Performance Log Users group using the Computer Management console on the corresponding web server.

1. On the web server or web application, open **Computer Management** console as **Administrator**.
2. In the console tree, select **Computer Management > System Tools > Local Users and Groups > Groups**.
3. Double-click the Performance users group listed in the warning.
4. In the Properties dialog for the Performance users group, click **Add**.
5. In the **Select Users** dialog box, type the name of the application pool from the warning, and then click **OK**.



The application pool appears in the **Members** section of the Properties dialog box.

6. Restart the web server or web application.

**Project planning worksheet does not load**

**Error when accessing Manage Preferred Resources**

**"Access to registry key 'Global' is denied" in Changepoint event log**

Restart the web server. These errors can occur when registry permissions have been changed.



## 14. Porting the Changepoint database

---

### Overview

This section describes how to port the Changepoint database between different versions or editions of SQL Server.

**Note:** If the version of SQL server you are currently using is not supported in the new version of Changepoint, then you must port the database first before upgrading it. Otherwise, the order is not important.

### Porting the Changepoint database

**Note:** Changepoint does not support SQL Server partitions.

#### On the source database server

1. Log in as `sa` to SQL Server Management Studio.
2. Disconnect all users from the database and set it to “Restricted Access to `db_owner`, `dbcreator` or `sysadmins`” only.
3. Issue a `CHECKPOINT`.
4. Detach the database.
5. Copy only the `.mdf` and `.ndf` database files to the target SQL server.
6. Repeat this procedure for the `CPEExtended` database.

#### On the target database server

1. Copy the following folder from the Changepoint product media to any location on the target SQL server:

```
\Changepoint\Utilities\Porting SQL Databases\
```

2. Remove the read-only attributes from the copied files.
3. Log in as `sa` to SQL Server Management Studio.
4. Open the following script in an editor:

```
<TargetServerPath>\Porting Changepoint.sql
```

5. If you did not use the default database name, replace “Changepoint” with the database name.

6. Update the full path and file names of all the .mdf and .ndf files in the script.
7. Scroll to the bottom of the script, and then edit the input value for the stored procedure `DBM_EnableSqlDependency`. For more information, see the comments in the script for details.
8. Replace the `CPSQLUser` string in the script with the SQL account on the target server that will be used for the Changepoint database connection.
9. (Optional) Edit the value of the input parameter for the stored procedure `DBM_SetupCPTempDB`. For details, see the comments in the script.
10. Edit the value of the input parameter for the stored procedure `DBM_SetupFullText`. Do one of the following:
  - To populate the full text indexes immediately: set `@Populate = 0x1`
  - For a large sized database, it is recommended to set `@Populate = 0x0`, and run the `CPFullText` scheduled job later.
11. Edit the value of the input parameter for the stored procedure `DBM_SetupScheduledJob`. For details, see the comments in the script.
  - a. If you are not using the default `ScheduledJobs` path, replace the value of the following variable with the path used:

```
@SCHEDULE_JOB_PATH = '<cp_root>\ScheduledJobs\'
```
  - b. If you are not using the default `Data Archiving` path, replace the value of the following variable with the path used:

```
@DATAARCHIVING_JOB_PATH = ' C:\Program Files\Changepoint\Changepoint\Data Archiving\'
```
12. Update the full path and file names of all the .mdf and .ndf files in the script for the `CPExtended` database.
13. Run the script against the Changepoint database.

### After porting the Changepoint database

After you port the Changepoint database to the target SQL server, perform the following steps.

1. Copy the contents of the `Scheduled Jobs` directory from the source SQL server, for example:

```
<SourceServerPath>:\<cp_root>\ScheduledJobs\*.*
```

to the Scheduled Jobs location on the target SQL server:

```
<TargetServerPath>:\<cp_root>\ScheduledJobs\
```

2. After porting the database, the size of the Changepoint and tempdb databases may have increased due to the processing done during the porting. Adjust them back to the limits and settings as per your internal policies.
3. Run the Login Settings utility on all the applicable applications and services to change the **Server** field to the correct value for the target SQL server.

For more information about using the Login Settings utility, see the *Changepoint Installation Guide*.

4. If you have an archive database and you are porting the source database, do the following:
  - a. Copy the contents of the Data Archiving directory from the source SQL server:

```
<SourceServerPath> C:\Program Files\Changepoint\Changepoint\Data Archiving\*.*
```

to the Data Archiving location on the target SQL server:

```
<TargetServerPath> C:\Program Files\Changepoint\Changepoint\Data Archiving
```

- b. Edit the following file:

```
<TargetServerPath> C:\Program Files\Changepoint\Changepoint\Data  
Archiving\Data Archiving.ini
```

- c. Change the server name in the following section and save the file:

```
[CPSQLServer]  
Name=TargetServerName
```

## Porting an archive database

The procedure for porting an archive database is similar to the procedure for porting a Changepoint database, except for the following:

- Do not set up scheduled jobs on the archive database
- If the source database remains on the same server, and only the archive database is ported to a new server, change the [ARCSQLServer] section instead of the [CPSQLServer] section of the <TargetServerPath> C:\Program Files\Changepoint\Changepoint\Data Archiving\Data Archiving.ini file.

Change the server name in the following section and save the file:

```
[ARCSQLServer]  
Name=ArcSQLName
```

## 15. Optimizing Performance

---

### Changepoint performance guidelines

You can improve the overall performance of the Changepoint application by making the following adjustments to the default configuration of the Changepoint website.

#### **Enable Session Cleanup scheduled job for RMW performance**

If you are using Resource Management Worksheet (RMW), it is strongly recommended that you activate the Session Cleanup scheduled job to maintain performance.

### Configuring the antivirus exclusion list

To prevent performance issues caused by virus scans, you must configure the exclusion list in the antivirus software.

#### **Exclusion list for the database server**

To determine the exclusion list for the SQL server, refer to the following information on the Microsoft website:

<https://support.microsoft.com/en-ca/help/309422/how-to-choose-antivirus-software-to-run-on-computers-that-are-running-sql-server>

#### **Exclusion list for the web server**

Include the subdirectories as well for all the excluded directories.

1. Changepoint installation directory: <cp\_root>

2. .NET Framework files:

- C:\Windows\Microsoft.NET\assembly
- C:\Windows\Microsoft.NET\Framework\v4.0.30319
- C:\Windows\Microsoft.NET\Framework64\v4.0.30319

3. IIS config folder:

%SystemDrive%\Windows\System32\inetsrv\config\

4. IIS Temporary Compressed Files

%SystemDrive%\inetpub\temp\IIS Temporary Compressed Files

5. Pagefile.sys

6. IIS Logs files, if IIS logging is enabled. The default is:

`C:\inetpub\logs\LogFiles`

### Performance guidelines for the Changepoint database server

The performance of the database server is particularly important when you are preparing an environment for high user loads. High performance is achieved by splitting as many I/O calls as possible across multiple I/O channels, disks, and spindles in order to keep I/O queuing to a minimum while using the entire available memory in the most efficient way.

#### Adjust maximum SQL server memory

By default, SQL Server configured with maximum server memory set to 2147483647 MB, which in effect is all of the server memory that is available. The default setting can result in insufficient memory for the operating system and other applications, which can cause instability and performance issues.

Therefore, you must adjust the value for the default setting to allow some of the server memory for the operating system and other applications. Use the following formula:

Maximum SQL Server Memory = Maximum Physical Memory – Memory for OS

Memory for the OS is between 1 GB and 4 GB, depending on the total physical memory of the server.

#### Virtualized SQL server using VMware

If you have virtualized the SQL server using VMware, review the guidelines in the *Architecting Microsoft SQL Server on VMware vSphere*, best practices guide, which is available on the VMware website:

<http://www.vmware.com/content/dam/digitalmarketing/vmware/en/pdf/solutions/sql-server-on-vmware-best-practices-guide.pdf>

#### Dedicated I/O channels for database file types

Each database file type should have its own dedicated I/O channel (LUN, RAID set or physical disk):

- Database log file on a RAID 10 array
- Database ndf files on a RAID 10 array
- Database mdf file on a RAID 10 array



- tempdb database on RAID 0

If only three channels are available, the log file and tempdb can be on one channel. Use multiple data files for tempdb (one per CPU-Core), set the initial size to 1 GB, and set the auto-grow to 1 GB.



## 16. Changepoint Connection String Decryption Utility

---

### About decrypting connection strings

This document provides code samples for using the Changepoint Public Utility (CPPubUtility) to decrypt the reportsdsn connection string in the Global.asa for use in customizations. For additional information, contact your client services representative or client manager.

CPPubUtility runs under the .NET Framework. This utility provides a single method interface, which can be used to decrypt the connection string information that is stored in an encrypted format in the Global.asa and Web.config files.

Typically, the CPPubUtility is installed on the web server, but it can also be installed on the database server if needed.

#### Changepoint Public Utility object interfaces

Object: CPPubUtility.Decrypt

Method: DecryptString

```
Public Function DecryptString(ByVal sConnectionString As String) As String
```

#### Time-out limits for decrypted connection strings

Time-out periods are enforced for the decrypted connection strings. If a time-out is set, the decrypted connection string includes the time-out value in seconds. For example:

```
provider=SQLOLEDB; Server=SERVER; database=Changepoint; uid=xxj; password=xxj;  
Trusted_Connection=No; Timeout=900
```

If there is no time-out limit, the decrypted connection string does not include a time-out value. For example:

```
provider=SQLOLEDB; Server=SERVER; database=Changepoint; uid=xxj; password=xxj;  
Trusted_Connection=No
```

### Code examples for decrypting connection strings

#### VB

```
Dim cmdSQL As ADODB.Command  
Dim oCPDecrypt as CPPubUtility.Decrypt  
Dim sConnectionString as String  
Set cmdSQL = New ADODB.Command  
Set oCPDecrypt = New CPPubUtility.Decrypt
```

```
sConnectionString = GetObjectContext("Session").Contents("DSN")
With cmdSQL
.ActiveConnection = oCPDecrypt.DecryptString(sConnectionString)

...
```

### VBScript

```
Dim cmdSQL
Dim oCPDecrypt
Dim sConnectionString
set cmdSQL = server.CreateObject("Adodb.Command")
set oCPDecrypt = server.CreateObject("CPPubUtility.Decrypt")
sConnectionString = Session("dsn")
With cmdSQL
.ActiveConnection = oCPDecrypt.DecryptString(sConnectionString)
```

### .NET

```
Dim cmdSQL As SqlCommand
Dim oCPDecrypt As New CPPubUtility.Decrypt()
Dim sConnectionString As String
' Get connection string from configure file
sConnectionString = ConfigurationSettings.AppSettings("SQLSettings")
' Decrypt the connection string
sConnectionString = oCPDecrypt.DecryptString(sConnectionString)
If sConnectionString <> "" Then
cmdSQL = New SqlCommand()
cmdSQL.Connection = New SqlConnection(sConnectionString)
....
```

## Report example for using CP Decrypt Interface

This report uses the CPDecrypt Interface to display a list of resource names and email addresses on any Changepoint customer database.

```
<!--#include virtual="/IncludeFiles/inSession.asp"-->

<html>
<head>
<meta HTTP-EQUIV="PRAGMA" CONTENT="NO-CACHE"
<link rel="stylesheet" type="text/css" href="/css/<%=strLCID%>_documents.css
media="screen">
<link rel="stylesheet" type="text/css" href="/css/<%=strLCID%>_docPRINT.css
media="print">
</head>
<body>
<table cellpadding=0 cellspacing=2 width='98%' border=0>
<tr>
```

```
<td class=head style="width:80%;" valign=top>Sample Report</td>
</tr>
<tr>
<td colspan=2 class=fadeline>&nbsp;</td>
</tr>
<td>v0.1<td>
</tr>
</table>
<p><span class="SummaryHead">Date & Time run:</span>&nbsp;&nbsp;&nbsp;</p>
<%=FormatDateTime(date(),1)%></p>
<%
dim sSQL, rst
Dim cmdSQL
Dim oCPDecrypt
Dim sConnectionString
set cmdSQL = server.CreateObject("Adodb.Command")
set oCPDecrypt = server.CreateObject("CPPubUtility.Decrypt")
sConnectionString = Session("reportsdsn")
With cmdSQL
.ActiveConnection = oCPDecrypt.DecryptString(sConnectionString)
.CommandType = AdCmdText
End With

sSQL="SELECT Resources.Name AS ResourceName,
ResourceAddress.EmailAddress AS ResourceEmailAddress" &_
"FROM Resources, ResourceAddress" &_
"WHERE Resources.ResourceID = ResourceAddress.Resourceid"
cmdSQL.CommandText = sSQL
set rst = cmdSQL.Execute
if not rst.EOF then
Response.Write("<table cellpadding='0' cellspacing='0' border='0'
width='100%'>")
Response.Write("<tr><td class='TableHead'>Resource Name</td>")
Response.Write("<td class='TableHead'>Resource Email Address</td>")
while not rst.EOF
Response.Write("<tr><td class='rowUnderline'>" &
rst("ResourceName").Value & "</td>")
Response.Write("<tr><td class='rowUnderline'>" &
rst("ResourceEmailAddress").Value & "</td>")
rst.MoveNext
wend
rst.Close
Response.Write("</table>")
else
Response.Write("<p><span class='SummaryHead'>No data to display</p>")
end if
set rst = nothing
%>
```

---

```
</body>  
</html>
```

## 17. Creating a Test and Training Environment

---

You can install both a test and training environment on the same server. For illustration purposes, the test and training environments in these topics are called TEST and TRAIN.

For each environment, the database and full text catalogs are backed up on the production environment and restored on the test/train server.

**Warning:** Do not install the TEST and TRAIN instances on the Changepoint production server. It is recommended that the production server have only one instance of the Changepoint database.

Backing up and restoring your production database to a different server still requires backing up the full text catalogs and running the SQL Dependencies script for each server, as outlined in step 3 to step 4 below.

### Creating a test and training environment on the same server

1. For the first database instance, run the installer on the test/train database server. When prompted, do the following:
  - Select the **Database only** setup type.
  - For the database name, enter a name for the test database, for example, TEST.
2. For the second database instance, run the installer again on the test/train database server. When prompted, do the following:
  - Select the **Database only** setup type.
  - Select a different <cp\_root> location than the first instance.
  - For the database name, enter a name for the training database, for example, TRAIN.
3. Back up the database and full text catalogs on the production environment and restore them on the TEST and TRAIN database instances.
4. In the EnableSQLDependency.sql script (located on the Changepoint product media in the \Changepoint\Manual Install\Upgrade folder), replace all occurrences of the CPSQLUser string with the SQL user ID you used when running the installer to create the test and train database instances for each database that you restored.
5. Run EnableSQLDependency.sql.
6. Run the following scripts:

- a. Setup\_Full\_Text.sql
  - b. Setup\_Scheduled\_jobs.sql
  - c. Setup-CPEExtended.sql
  - d. Setup-CPTempDB.sql (Ensure that the value for @CPTemp\_DB is different from the name of the original CPTempDB.)
7. Run the installer on the web server for each instance you want to create (TEST and TRAIN, for example). Each website must have a unique name and port number. Configure the Global.asa and Web.config files using the SQL accounts you created for each database.
  8. As required, run the installer on the same server or another server to install the required Changepoint Windows services. For more information on installing and configuring the services, see "Installing a Changepoint Windows service" on page 51.
  9. In order for users to readily distinguish between the TEST Changepoint Administration and the TRAIN Changepoint Administration versions, do one of the following:
    - Create a Corporate News Knowledge Item with an expiry several years from now indicating that this is a test/training environment.
    - Update the Registration table and add "\*\*\*TRAIN\*\*\*" OR "\*\*\*TEST\*\*\*" to the company name, which appears at the top of the Changepoint interface when users sign in to Changepoint.
  10. Install and configure Redis.
  11. Sign in to Changepoint Administration and update the server integration and email integration settings with the appropriate URLs for each instance.
  12. If you use IBM Cognos Analytics, you must port the Cognos content store database. For more information, see "Porting the Cognos content store database" on page 192.

### Porting the Cognos content store database

Porting the Cognos content store database includes the following steps:

1. Export the Cognos content store database.
2. Import the Cognos metadata package.
3. Set up the Cognos data source for the testing site.



## Export the Cognos content store database

1. Sign in to Changepoint as Changepoint administrator.
2. Click **Analytics > Analytics Portal**. The **IBM Cognos Analytics** portal appears.
3. Click **Manage**, then click **Administration console**. The **IBM Cognos Administration** console appears.
4. Click **Content Administration**, and then select the export icon.
5. Enter a name for the deployment specification (for example Changepoint, and then click **Next**.
6. In the **Deployment method** section, click **Select the entire Content Store** and then click **Next**.
7. In the **New archive** option, enter a name for the deployment archive (for example, Changepoint\_Export) and then click **Next**.
8. Enter an encryption password for the archive and then click **OK**.
9. Review the summary and then click **Next**.
10. Click **Save and run once**, and then click **Finish**.
11. Select **Now**, and then click **Run**.
12. Click **OK**.

## Import the Cognos metadata package

Import the Cognos metadata package for the testing site by following the instructions in "Importing the Changepoint metadata package" on page 116.

## Set up the Cognos data source for the testing site

1. Delete the production Changepoint data source.
2. Recreate the data source following the instructions in "Setting up the data source for IBM Cognos Analytics" on page 117.

## Setting up Client Portal in a training environment

For users to access Client Portal in a training environment, you can either set up a separate Client Portal website, or users can specify a different login page in the URL of an existing

Changepoint website, for example:

`http://servername:port/fcelogin.asp`

**Note:** If enhanced session management is enabled in Changepoint Administration, you must create a separate Client Portal website. For more information, see "Setting up a Client Portal website" on page 147.

## A. Configuration file settings

---

### About Changepoint configuration files

There are two types of files that contain configuration settings for Changepoint.

#### Web.config files

Web.config files are application configuration files that contain settings that apply to the areas of Changepoint that were developed using ASP .NET web application technology (.aspx).

There is a configuration file for each application (Changepoint, Report Designer, and Web Services). The default locations are:

```
<cp_root>\Enterprise\Web.config  
<cp_root>\ReportDesigner\Web.config  
<cp_root>\CP Web Services\Web.config  
<cp_root>\API\CP Web Services\Web.config  
<cp_root>\Enterprise\WebAPI\Web.config  
<cp_root>\Enterprise\WebSockets\Web.config
```

#### Global.asa file

The Global.asa file is a centralized file that contains settings that apply to areas of Changepoint that were developed using the ASP web application technology.

The default location is:

```
<cp_root>\Enterprise\Global.asa
```

### Web.config configuration file settings

#### Authentication settings

By default, all Changepoint website folders and files are set to application authentication. If you set up your websites for SSL, you must change settings in the corresponding Web.config files. To use SSL with application authentication, see "About application authentication" on page 140.

#### Caching settings

- EnableSQLDependency

If set to 1, the Changepoint SQL dependency cache is enabled. Resource feature information will be cached as resources sign into the application. The default value is 1.

- `SQLDependencyCacheDuration`

The elapsed time required in minutes before the Changepoint SQL dependency cache is cleared. The default is 240.

### Cognos Analytics settings

#### Launch Cognos portlets and portals in new browser window

By default, Cognos portlets and portals are launched within the Changepoint container. However, you can configure Cognos portlets and portals to open in a new browser window.

- `Cognos.IE.LaunchPortletsInNewWindow`

When set to “true”, Cognos portlets and portals are launched in a new browser window.

### Cookie settings

By default, cookies are enabled. To disable cookies, edit the `sessionState` element and set `cookieless="true"`.

### Export Publishing settings

These settings in the Changepoint Web.config file apply only to the export publishing resend option in Changepoint Administration.

- `Microsoft.ServiceBus.ConnectionString`

The connection string that is used to access Microsoft Service Bus.

- `EnableEmail`

If set to 1, email notifications are enabled for export publishing errors. The Changepoint Mail Service must be installed in order to send notifications. The default is 0.

- `EmailAddress`

A semicolon-separated list of email addresses to which notifications of export publishing errors are sent. The `EnableEmail` setting must be enabled and the Changepoint Mail Service must be installed in order to send notifications to the specified addresses.

### Field settings

The `Fields.MaxSearchResult` setting defines the maximum number of records that can be returned for certain type-ahead fields. When the maximum is exceeded, the user is prompted

to narrow the search criteria. The default is 500.

The `Fields.MaxSearchResult` setting applies to the following type-ahead fields:

- new type-ahead fields (excluding the tree view type-ahead fields), which are identified by the yellow background when the user starts entering data in the field
- new type-ahead fields for configurable fields
- scenarios comparisons
- project worksheet

There are no configuration settings for the old type-ahead fields with the clear fields icons. The maximum search results for these fields are hard coded and vary depending on the field.

Type-ahead configurable fields on projects and requests have an internal limit of 1000 for the maximum number of records that can be returned. The imposed limit is the lesser of 1000 or the value of the `Fields.MaxSearchResult` setting.

There is a separate setting for mobile access. For more information, see "Mobile access settings" on page 198.

## File type filter settings

The `upload.FileExtensionNameExcludeFilter` setting defines the file types that are blocked from being uploaded through File Upload dialogs. The default list is "exe,bat,com."

## HTTP runtime settings

If required, you can modify the values of these attributes of the `httpRuntime` setting:

```
<httpRuntime executionTimeout="900" maxRequestLength="40960" ... />
```

The descriptions of the attributes are as follows:

- `executionTimeout`

The maximum number of seconds that a request is allowed to execute before being timed out. The default is 900.

- `maxRequestLength`

The input buffering threshold in KB when uploading files. The default is 40960.

### Logging settings

- `Logging.UseInProcessLogging`

Enables/disables in-process logging. If set to false, then nothing is logged unless the out-of-process logging process is running.

- `Logging.LogToDB`

Enables/disables database logging. When database logging is enabled, the data is stored in the Trace table in the `Changepoint_Extended` database, which is located on the same server as the Changepoint database.

- `Logging.LoggingFilePath`

Creates a new logging file under the specified path every day, unless the path is empty, in which case nothing is logged to the file.

- `Logging.RollingFileSize`

Threshold size of the file in KB after which a new file is created. Default size is 10000 KB.

- `Logging.LoggingLevel`

Default logging level is set to `Informational`, which logs minimal information that is required to diagnose issues. `Verbose` level logs more incoming WebAPI request payload information for in-depth diagnostics.

- `Logging.LoggingKeywords`

- `WebAPI` keyword logs all WebAPI Errors/Critical Errors
- `Performance` keyword logs response time information for WebAPI requests.

### Mobile access settings

The following settings are related to mobile access:

- `MobileFields.MaxSearchResult`

The maximum number of records that can be returned for type-ahead fields when Changepoint is accessed using a mobile device. The default value is 25.

- `SupportedMobileDevice`

A semicolon-separated list of supported mobile devices as referenced in the browser's user-agent string. You can add unsupported mobile devices to allow them access, if required.

## Page Content IDs (PCIDs)

Each string on the user interface is associated with a page content ID (PCID). There is a setting that you can use to display the PCIDs instead of the strings, which can be helpful if you want to identify certain strings.

**Warning:** It is strongly recommended that you enable this setting only in a test environment.

- GlobalDebug

When set to 1, the PCIDs are displayed on the user interface instead of the strings.

## Page Size

The default page size used in some areas of Changepoint (for example, project portfolio and advanced search) is controlled by the following setting:

- PageSize

The number of records to display before paging. The default is 100.

## Projects tree view settings – Web.config

The **Projects** tree view display is controlled by several parameters, some of which are set in Web.config. Other parameters are set in Global.asa.

### Number of projects in the Projects tree view

- tvProject.Project.RecordAmount

Determines the number of projects (default 500) that are displayed initially in the **Projects** tree view.

- tvProject.Project.PackAmount

Determines the number of projects (default 50) by which the **Projects** tree view is incremented on demand.

### Refresh of the Projects tree view

- tvProject.Project.AutoRefresh

When enabled (tvProject.Project.AutoRefresh=1, default), the **Projects** tree view is refreshed automatically when a project is created or deleted, or when the project name is modified.

When disabled (tvProject.Project.AutoRefresh=0), the **Projects** tree view is not refreshed when a project is created or deleted, or when the project name is modified, until the **Filter** button is clicked.

- tvProject.Task.AutoRefresh

When enabled (tvProject.Task.AutoRefresh=1, default), the **Projects** tree view is refreshed automatically when a task is created or deleted, or when the task name is modified using the **Edit Task** dialog.

When disabled (tvProject.Task.AutoRefresh=0), the **Projects** tree view is not refreshed when a task is created or deleted, or when the task name is modified using the **Edit Task** dialog, until the **Filter** button is clicked.

**Note:** When you create or delete a task in the project worksheet, the **Projects** tree view is not refreshed, regardless of the value of tvProject.Task.AutoRefresh.

### Initial loading when a project is selected in the tree

See "Projects tree view settings – Global.asa" on page 203.

### Copy project

See "Projects tree view settings – Global.asa" on page 203.

## Scenario comparisons worksheet (SCW) settings

The following settings apply to scenario comparisons:

- ScenarioComparison.MaxViewColumnCount

The maximum number of columns that can be selected in a view. The default is 100.

- ScenarioComparison.MaxFilterColumnCount

The maximum number of columns that can be displayed in the filter column of the **Manage Filter** dialog. The default is 5000.

- ScenarioComparison.MaxFilterScenarioCount

The maximum number of items that can be selected in the **Selected items** list on the **Other Criteria** tab of the **Manage Filter** dialog. The default is 50.



## Resource management worksheet (RMW) settings

The following setting applies to the Resource Management Worksheet:

- ResourceManagementView.MaxRecord

The maximum number of records that can be returned for any given type-ahead field in the Resource Management Worksheet. When the maximum is exceeded, the user is prompted to narrow the criteria in the type-ahead field.

Some of the Resource Management Worksheet filter pages have an Engagement/Initiative list that is populated based on selections in other fields. The maximum record setting also applies to these Engagement/Initiative lists. The default is 200.

## Time-out settings

The ASP .NET implementations (.aspx) in Changepoint use the following setting:

- CommandTimeout

The default value is 600 seconds for Changepoint, and 30 seconds for Report Designer.

## Terminology mode settings

The mode is selected when Changepoint is installed or upgraded. The only reason for changing this setting after installation is to switch terminology.

For Changepoint PPM (Project Portfolio Management):

```
Application("CompanyProfile") = "ITD"
```

For Changepoint PSA (Professional Services Automation):

```
Application("CompanyProfile") = "PSO"
```

**Note:** Other changes are required to switch terminology. For more information, see "Switching between PSA mode and PPM mode" on page 233.

## Tree view settings

The naming pattern for the tree view settings in the Web.config file is:

```
<add key="treeview.node.property" value="n"/>
```

For example, the following is a typical pair of tree view settings:

```
<add key="tvMyContact.Contact.RecordAmount" value="500"/>
<add key="tvMyContact.Contact.PackAmount" value="50"/>
```

This example sets the `RecordAmount` and `PackAmount` properties for the `Contact` node of the `MyContact` tree view. The `RecordAmount` property defines the maximum the number of records to load when the node is first expanded. The `PackAmount` property defines the size of the next lot of records to load for this node. Using the above example, if there are more than 500 contacts in the database, the first expansion shows the first 500 contacts, with a “next” link at the bottom of the list. Clicking the “next” link retrieves the next 50.

**Note:** You cannot use `tvOpportunity.Engagement` as a `treeview.node` pair for this purpose.

## Workflow settings

The following settings control when a filter appears in the workflow view:

- `Workflow.Layout.StateShapeThreshold`

The maximum number of states that can be displayed in the workflow view before a filter appears.

- `Workflow.Layout.StateTransitionThreshold`

The maximum number of transitions that can be displayed in the workflow view before a filter appears.

The filter will also appear if the total number of states and transitions in the workflow is greater than the sum of these two settings.

## Global.asa configuration file settings

### Caching settings

- `Application("EnableSQLDependency") = 1`

If set to 1, the Changeport SQL dependency cache is enabled. Resource feature information will be cached as users log onto the application.

- `Application("SQLDependencyCacheDuration") = 240`

The Changeport SQL dependency cache is cleared after 240 minutes.

### Cookie settings

By default, the `AgentlessCookie` setting is enabled:

```
Application("AgentlessCookie") = 1
```

When enabled (set to 1), a cookie will be returned to the client machine with the user's login ID. The cookie can be used by monitoring software to identify a user for reporting purposes. You can disable the setting by changing the value to 0.

## Page Content ID (PCID) settings

```
Application("GlobalDebug")=0
```

When enabled, the page content IDs (PCIDs) are displayed in the user interface instead of the PCID strings (field labels). This can be helpful to debug changes to the labels, but should only be done in a test environment. The setting is disabled by default.

## Page size

The default page size used in some areas of Changepoint (for example, project portfolio and advanced search) is controlled by the following setting:

```
Application("PageSize") = 100
```

The value is the number of records to be displayed before paging.

## Projects tree view settings – Global.asa

The **Projects** tree view display is controlled by several parameters, some of which are set in Global.asa. Other parameters are set in Web.config.

### Initial loading when a project is selected in the tree view

- tvProject.SkipAutoLoad

When enabled (tvProject.SkipAutoLoad=1), the **Projects** tree view is displayed only after a resource clicks the **Filter** button.

When disabled (tvProject.SkipAutoLoad=0, default), the **Projects** tree view is displayed when the resource selects the project in the tree.

### Refresh project tree after copying a project

- tvProject.CopyProject.AutoRefresh

When enabled (tvProject.CopyProject.AutoRefresh=1, default), the project tree view is refreshed automatically when copy project is used to create a new project.

When disabled (tvProject.CopyProject.AutoRefresh=0), the project tree view is not refreshed after a project is copied, until the **Filter** button is clicked.

### Number of projects in the project tree view

See "Web.config configuration file settings " on page 195.

### Refresh of the project tree view

See "Web.config configuration file settings " on page 195.

## Reporting

The following configuration settings relate to reporting:

- `Application("VacationTrackStartDate") = "YYYY-MM-DD"`

The start date for reports that track vacation.

- `Application("rsNotificationInterval") = 5`

The interval, in minutes, that the Changepoint UI checks to see if the user has any report schedules that have completed. If reports have completed, then a small, informational window is displayed in the Changepoint interface.

- `Application("OpenRequestsByCustomerRecordAmount") = 500`

The maximum number of customer records that are returned in the customer drop-down list on the filter page for the Open Requests by Company report.

## Terminology mode

The mode is selected when Changepoint is installed or upgraded. The only reason for changing this setting after installation is to switch terminology.

For Changepoint PPM (Project Portfolio Management):

```
Application("CompanyProfile") = "ITD"
```

For Changepoint PSA (Professional Services Automation):

```
Application("CompanyProfile") = "PSO"
```

**Note:** Other changes are required to switch terminology. For more information, see "Running both PSA mode and PPM mode on the same database" on page 234.

## Time-out (ADO Commands)

To enable a global time-out value that will be used for all ADO commands, change "0" in the following setting to the number of seconds that you want to assign to the global time-out value:

```
Application("GlobalCommandTimeout") = 0
```

When set to zero, which is the default, the global time-out setting is disabled. In this case, the time-out utilized is either the ADO command value or the value that is supplied in connection string.



## B. Troubleshooting

---

### Changepoint installer issues

**\* WARNING: Redis cache service could not be installed. Ensure that service (RedisService) and port (6379) is not in use. Please review the RedisCacheService.log file under the InstallLog folder and install and start the service manually.**

During the Changepoint 2017 installation, Redis cache service could not be installed and started. This would typically occur if there is already a Windows service, including an existing instance of Redis, that is using the Redis service name (RedisService), or the Redis port (6379) is currently assigned to another process.

To properly install the Redis service, you must assign a unique service and a port that is not currently assigned. Please refer to the "Installing and Configuring Redis" on page 31 for the manual Redis service installation and start up commands.

#### Database upgrade error

If the database upgrade fails, an error message appears. Do the following:

1. Check the log file for details. The log file path is specified in the error message.
2. Restore the database from the backup you made before upgrading.
3. Resolve the issues detailed in the log file.
4. Perform a manual database upgrade.

#### IIS error when installing Changepoint websites

If you attempt to install the Changepoint websites on a web server, but Internet Information Services (IIS) is missing, or the wrong version of IIS is installed, an error message appears.

Make sure that a supported version of IIS is installed on the web server and then try again.

#### **Error: Operation failed with #X#####X An attempt was made to load a program with an incorrect format**

If this error occurs during the installation of the Changepoint websites, ensure that the required components and roles have been installed on the web server. For more information, see the *Changepoint Product Architecture and Technology Matrix*.

**Error Number: 0x80004005 Description: Unspecified error Setup will now terminate**

This error might occur if you use Remote Desktop Protocol (RDP) to install Changepoint.

Increase the colors setting to more than 256 colors (**Remote Desktop Connection > Display > Colors.**)

## Changepoint troubleshooting issues

### Empty keys error in Event log

The NotificationProvider.Key1 and NotificationProvider.Key2 keys must be configured with valid license values to enable use of the Changepoint Mobile app.

If you have not set up Changepoint to use the Mobile app, then you must comment out the NotificationProvider.Key1 and NotificationProvider.Key2 keys in the `CPMail.exe.config` file.

### HTTP 403 error Project Planning Worksheet fails to save Preferred resources cannot be edited

If you have enabled Request Filtering on the Changepoint website or use tools such as URLScan to restrict HTTP verbs in HTTP traffic, you must do the following:

1. Add the following verbs to the [AllowVerbs] section:

- PUT
- PATCH
- DELETE

2. Remove the same verbs from the [DenyVerbs] section.

Blocking these verbs can result in unexpected HTTP errors and functional issues in Changepoint. As of this service pack, Changepoint deploys the new Changepoint REST API internally (and externally as an option) to enable mobile app support and some internal product functionality. The REST API uses the HTTP verbs in its transactions.

3. Restart the web server or web application.

### Project planning worksheet does not load Error when accessing Manage Preferred Resources "Access to registry key 'Global' is denied" in Changepoint event log

Restart the web server. These errors can occur when registry permissions have been changed.



**Users cannot upload large attachments**

In order to upload attachments up to 40 MB in size to team folders, requests, and knowledge items, you might have to set the following in IIS Request Filtering and/or in URLScan.ini, depending on the versions of Windows Server and IIS that you are using:

```
maxAllowedContentLength=40000000
```

**Changepoint web pages do not render**

Ensure that the required Windows components have been installed.

**Browser not supported message in Internet Explorer (IE)**

If users try to access Changepoint using Internet Explorer and receive a message that the browser is not supported, they must do the following:

1. Disable the compatibility view setting.
2. Ensure that the Changepoint website is not in the “Websites you’ve added to Compatibility View” list.

For more information about disabling the compatibility view setting, see the Internet Explorer online help.

**Changepoint web pages take a long time to render**

The first time you access a page in Changepoint, the page is compiled and takes longer than usual to render. If your antivirus software interferes with the compilation, a page error might occur. If a page error occurs, navigate to the page again. Some larger pages require re-navigating more than once. After the compilation is complete, the pages render more quickly.

**Error message appears instead of the Changepoint sign-in dialog box**

Ensure that the Login Settings utility has been run to configure the Changepoint configuration files and that the database server, database name and SQL account information entered is correct. For more information using the Login Settings utility, see "About configuring database connection settings" on page 65.

**Error message: Please contact your system admin for this error!**

Refer to the Changepoint Section in the Event Viewer for the actual error message.

### **Error message: Changepoint is not correctly registered**

Ensure that the license file has been imported using Changepoint Administration.

### **Application is restarting error in the web browser**

Ensure that the Changepoint application folder (<cp\_root>) is excluded from antivirus scans.

For more information, see:

### **JavaScript errors in Internet Explorer**

After an upgrade, users must delete all browsing history in Internet Explorer. If users still encounter JavaScript errors after they have deleted the browsing history, they must delete the temporary Internet files manually. For more information about deleting browsing history and temporary Internet files, see the Internet Explorer online help.

### **Ajax errors**

Ajax errors are typically a result of a configuration mismatch between the authentication configured for the website in IIS and the authentication settings configured in the Web.config file.

To resolve the errors, correct the mismatch. For more information, see the authentication sections in "Overview of configuration" on page 47 and "Web.config configuration file settings" on page 195.

### **Changepoint Windows Services errors in the Event Viewer**

Ensure that the database connection settings have been configured properly for the Changepoint Windows Services. For more information, see "About configuring database connection settings" on page 65.

### **Repeated logon failures with “Your session is no longer active” message**

This error can occur if the Changepoint websites are sharing the same application pool, or if you attempted to install multiple website instances without specifying a unique name and port number for each website. To resolve the issue, ensure that the application pool, website name, and port number are unique for each website instance.

### **Knowledge search returns “No matches found” message**

Do the following:

1. Verify that the user has the required permissions to view the records.

2. Verify that the “CPFullText” or “CPFullText using background updates” scheduled jobs are enabled and ran successfully.

If the user has the required permissions and the scheduled jobs ran successfully, then there might be a full text issue. Refer to the Microsoft website for information on troubleshooting full text issues.

### **Child workgroups not sorted correctly in standard reports that contain a Resource Workgroup selection field**

#### **Cannot expand workgroups in the User Setup tree view**

If one or both of the above issues occur, you must regenerate the object breakdown structure (OBS) for workgroups:

1. From the **2014 Release Notes and Patches** team folder, download the **Workgroup OBS Utility.zip** file from the **Utility** subfolder
2. From the **Workgroup OBS Utility.zip** file, extract the CPRegenerateWGOBS.exe to any client machine that has a connection to the Changepoint database server.
3. Execute CPRegenerateWGOBS.exe.
4. Enter the SQL server name, database name, SQL login, and password.
5. Click **Connect**.
6. From the **Global Workgroup** list, select the global workgroup.
7. Click **Generate OBS**.

## **SSO ADFS issues**

### **Server Error in '/RP-STS\_ADFS' Application**

If users encounter an error similar to the following:

Server Error in '/RP-STS\_ADFS' Application.

The data protection operation was unsuccessful. This may have been caused by not having the user profile loaded for the current thread's user context, which may be the case when the thread is impersonating.

Do the following on the Changepoint web server:

1. In Internet Information Services (IIS) Manager, click **Application Pools**

2. Select the Application Pool used by the Changepoint web site.
3. Click **Advanced Settings**
4. Set **Load User Profile** to True, then click **OK** to save and close **Advanced Settings**
5. Re-open **Advanced Settings**, set **Load User Profile** back to False, then click **OK**

## Changepoint Web Services API Issues

### Errors related to .Net version when accessing Web Services API

If users encounter .Net version-related errors when accessing the Web Services API, and the API is installed on a web server other than the Changepoint web server, ensure that the application pool for the hosting website is using the required version of the .NET framework.

## Changepoint Windows Services Issues

### Changepoint Windows Service does not appear in Add/Remove program in Windows Control Panel

If the Windows service you want to remove does not appear in the **Add/Remove Programs** in the Windows Control Panel, then you must do the following:

1. Run the installation program for the service from the Changepoint media for *the previous release*, and select **Repair**.
2. After the installation is repaired, you can remove the service using **Add/Remove Programs**.

### Changepoint Windows Service does not start

All Changepoint Windows Services validate their version numbers against the version table in Changepoint. The version numbers must match, otherwise the service will not start, and a message is recorded in the event log.

### Emails remain queued

Due to startup timing issues, it is possible that services have been started but are not functioning properly, which may cause emails to remain queued instead of being sent.

You can fix this problem by creating a dependency for the Changepoint Windows Services on the MSSQLServer service. For more information, see the Microsoft knowledge base article 193888 at: <https://support.microsoft.com/en-us/help/193888/how-to-delay-loading-of-specific-services>.

---

## Exchange Server troubleshooting

### Calendar items do not synchronize from Changepoint to Outlook

- Ensure that the user has the Enable Calendar Synchronization feature.
- Ensure that the user has selected the correct calendar synchronization option in the **Preferences** view in Changepoint.

### Calendar items do not synchronize from Outlook to Changepoint

- Ensure the Changepoint Exchange Synchronization Service is running.
- Ensure that calendar items match the General Calendar Synchronization Options settings (Daily Start Time, Daily End Time and Time Zone) in the **Preferences** view in Changepoint.

### Event log

Check the event log for messages and errors. The following table lists the common events (EWS refers to the Exchange Web Service).

Event	Comments
<i>Description:</i> The primary SMTP address must be specified when referencing a mailbox.	<i>Error.</i> The message is returned via EWS. Users must have an Exchange primary email address in Changepoint.
<i>Description:</i> Unable to create calendar item in Exchange for user: user@domain.com	<i>Error.</i> The message is returned via EWS. Calendar item add failed. This can happen for a number of reasons, for example, a user is synchronizing with an alternate email address.
<i>Description:</i> Unable to update calendar item in Exchange for user: user@domain.com	<i>Error.</i> The message is returned via EWS. Update to calendar item failed. This can happen for a number of reasons, for example, a user is synchronizing with an alternate email address.
<i>Description:</i> Unable to update calendar item in Changepoint for user: user@domain.com	<i>Error.</i> The message is returned via Changepoint. Update to calendar item failed.

Event	Comments
<i>Description:</i> Unable to add calendar item in Changepoint for user: user@domain.com	<i>Error.</i> The message is returned via Changepoint. Calendar item add failed.
<i>Description:</i> Autodiscover exception occurred in DiscoverTryUrls. <i>Email Address:</i> user@domain.com <i>Exception:</i> The email address cannot be found.	<i>Warning.</i> The email address cannot be found.
<i>Description:</i> Autodiscover exception occurred in DiscoveryTryUrl. <i>Target url:</i> https://servername.domainname /autodiscover/autodiscover.xml	<i>Warning.</i> Autodiscovery failed when targeting the indicated URL.
<i>Description:</i> Autodiscover exception occurred in GetRedirectUrl. <i>Target url:</i> https://servername.domainname /autodiscover/autodiscover.xml	<i>Warning.</i> Autodiscovery failed when targeting the indicated URL.
<i>Description:</i> Autodiscovery failed for user: user@domain.com	<i>Warning.</i> Autodiscovery failed for the indicated user.
<i>Description:</i> Calendar Synchronization Started - Version: XX.XX.XXX.XXX	<i>Information.</i> Documents the start of a synchronization cycle.
<i>Description:</i> Calendar Synchronization Finished	<i>Information.</i> Documents the completion of a synchronization cycle.
<i>Function:</i> Changepoint.Synchronization.Exchange .CreateCalendarItem <i>Response:</i> ErrorCalendarDurationIsTooLong <i>Extended Information:</i> Email address: user@domain.com	<i>Error.</i> EWS prevents calendar items from being created when duration is greater than five years. This is a limitation in Exchange .

Event	Comments
<p><i>Function:</i>  Changepoint.Synchronization.Exchange  .UpdateCalendarItem  <i>Response:</i> ErrorCalendarDurationIsTooLong  <i>Extended Information:</i> Email address:  user@domain.com</p>	<p><i>Error.</i> EWS prevents calendar items from being updated when duration is greater than five years. This is a limitation in Exchange .</p>
<p><i>Function:</i>  Changepoint.Synchronization.Exchange  .GetItem  <i>Response:</i> ErrorItemNotFound  <i>Extended Information:</i> Id:  AAMkADUxOWVINTdjLWE2OW  QtNDQwMC1hMTZmLTUyMWFK  N2RmNDk4OQBGAIAAAAIhrFE  5hKpSK2C4OPkOtc/BwAAOrm5Pd  RuTI2+olSwbXC4AAAAATSrAAD  Bake3jpVuTLttXQS5sS3xAAzFdNI5AAA=</p>	<p><i>Error.</i> An attempt was made to retrieve a deleted item from Exchange. This message can be ignored as the code responds by recreating the deleted item.</p>
<p><i>Function:</i>  Changepoint.Synchronization.Exchange  .UpdateCalendarItem  <i>Response:</i>  ErrorOccurrenceTimeSpanTooBig  <i>Extended Information:</i> Email address:  user@domain.com</p>	<p><i>Error.</i> The message is returned via EWS. Indicates that the time allotment for a given occurrence overlaps with another occurrence of the same recurring item.</p>

## SQL Server troubleshooting

### SQL Server setup issues

The System Information script (SQLEnvironmentReport.sql) provides information that you can use to troubleshoot system setup issues.

1. Log on to the SQL server machine with the local administrator account.
2. Run the following script from the Changepoint product media:

```
\Changepoint\Utilities\Changepoint System Information Script
\SQLEnvironmentReport.sql
```

The following information is reported:

- General system information:

Host Name  
OS Name  
OS Version  
OS Configuration  
System Up Time  
System Manufacturer  
System Model  
System Type  
Processor(s)  
BIOS Version  
Windows Directory  
Boot Device  
System Locale  
Input Locale  
Time Zone  
Total Physical Memory  
Available Physical Memory  
Page File  
Page File Location(s)  
Hotfix(s)  
Network Card(s)  
All Services Status  
SQL Service Status

- Current SQL Instance information

Current SQL Instance  
SQL Server Version  
SQL Server Property  
SQL Server Configure

- Database information (will list information for each database)

Database Name  
Database Property  
Database Files

## Changepoint database troubleshooting

### Error “!!! MSDTC on server ‘server\_name’ is unavailable” during manual database upgrade

Start the “Distributed Transaction Coordinator” service on the server where the database upgrade is being performed. Then repeat the manual database upgrade steps to complete the



installation process.

### **Password validation error when running Porting Changepoint.sql**

If you receive a password validation error when running the `Porting Changepoint.sql` script, reset the password to a password that conforms to your Windows security policy. If the database has already been attached successfully, run the script again starting from:

```
USE Changepoint
GO
```

Similarly, if you receive any other errors with this script and the database is already attached, fix the problem and be sure to choose an appropriate starting point beyond the attachment section when rerunning the script.

### **Restoring the database from a backup**

When you restore the Changepoint database on a server, the service broker is disabled. Run the following on the restored database to enable the service broker:

```
ALTER DATABASE <DatabaseName> SET SINGLE_USER WITH ROLLBACK IMMEDIATE
ALTER DATABASE <DatabaseName> SET ENABLE_BROKER
ALTER DATABASE <DatabaseName> SET MULTI_USER
```

### **Excessive table growth issues**

If email notifications have been enabled in Changepoint Administration, verify that both the Changepoint Email Notification Service and the Changepoint Mail service have been installed and configured to run at regular intervals. Otherwise, the `EmailAuditStaging`, `EmailAuditNotification`, and `EmailQueue` tables in the database can potentially grow to a very large size.

## **Archive database troubleshooting**

### **Archive Aged Entities Job or Data archiving[200x].dtsx fails**

If the Archive Aged Entities job or `Data Archiving.dtsx` fails for any reason, and you do not want to proceed with the archiving, you must run the following script to re-enable triggers and foreign keys on the Changepoint source database:

```
C:\Program Files\Changepoint\Changepoint\Data Archiving\EnableAllTRsNFKs.sql
```

If required, restore the archive database from backup.

### **Error running Archive Aged Entities Job on Windows 2008/.NET 3.5 SP1/SQL2008**

To be able to run the Archive Aged Entities job on a Windows 2008/.NET 3.5 SP1/SQL2008 environment, you must log in using a user account with local admin privileges instead of a system account. In other words, you cannot use an account such as LocalService/NetworkService/LocalSystem.

### **Temporary Database available for troubleshooting**

The Archive Aged Entities job automatically creates a temporary database named <database name>\_ArcDistribution on the source database server. The temporary database is available for troubleshooting purposes until the next time that the job is run, when it is dropped and recreated.

### **Archive database performance issues**

The following performance issues have opposing solutions:

- To improve performance of the archive database for end users, you can add indexes to the Archiving database.
- To improve the speed of the Archiving Aged Entities scheduled job, you can remove indexes from the Archiving database.

You can add indexes by applying the `Adding archiving indexes.sql` script, or remove indexes by applying the `Removing archiving indexes.sql` script from the following location on the Changepoint media:

`\Changepoint\Manual Install\Data Archiving\`

## **Cognos Analytics installation troubleshooting**

### **"Invalid login response" message when signing into Analytics Portal from Changepoint**

This message appears when the security configuration has not been set up for Cognos. For more information, see "Setting the security settings in Cognos" on page 119.

### **Error: RQP-DEF-0177 appears in report or workspace area**

Error: "RQP-DEF-0177 An error occurred while performing operation 'sqlPrepareWithOptions' status='-201'" in the report or workspace area, likely means that the database name in the SQL connection string for Cognos was not specified during installation.

**Error: Invalid Web Content URI when configuring the Application Tier**

If you get this error when trying to save the configuration of the Environment node in the **Explorer** pane during the configuration of the Application Tier, then you must reset the Web Content URI to the default as follows:

1. In the **Explorer** pane, select the Portal Services node.
2. Click in the Web Content URI field.
3. From the Cognos menu, select **Edit > Reset to Default**.

**Connection test fails when testing the data source configuration**

If the connection test fails for either SQL or the JDBC, it likely means that no SQL Server Native Client was installed on Application Tier server, or the wrong native client was installed.

On the Application Tier server, install the version of SQL Server Native Client that matches the SQL version on the server that hosts the Cognos content store. For more information, see the "Setting up the data source for IBM Cognos Analytics" on page 117.

**Error: AAA-CFG-0008 in AppTier configuration**

If the following message appears during the start of the Cognos service on Application Tier:

```
Error: "AAA-CFG-0008 The handler class 'com.changeoint.cap.CapControl ' cannot  
be loaded".  
Error: "java.lang.ClassNotFoundException: com.changeoint.cap.CapControl".
```

Retest the Changepoint namespace connection.

If the test passes, restart the service.

If the test fails, delete and recreate the Changepoint namespace, then test again.

**Web server error when embedding graphics that are hosted on a web server in reports**

To embed graphics that are hosted on a web server in your reports, refer to the IBM Cognos Analytics product documentation.

If you are using URLScan, WebRequest Filtering or Application Filtering at your firewall to block WebDAV traffic, you must make the necessary security configuration changes.

## Changepoint-Cognos Sync utility troubleshooting

### Timeout error when updating the model with a new revision

If there are a large number of configurable fields in the database, one or both of the following might occur when you update the Cognos model with a new revision:

- **New Revision** dialog box takes a long time to appear
- “Message: Timeout expired” error in the Cognos UI log file

You can increase the timeout setting in the CognosClientTools.exe.config file:

1. As administrator, open the CognosClientTools.exe.config file:

```
%programfiles%\Changepoint\Cognos Client Tools\CognosClientTools.exe.config
```

2. Edit the following key, then save the file. The default value is 300.

```
<add key="CommandTimeOut" value="1800" />
```

### Error: BME-SP-0007 An unknown error occurred during execution

This error appears on the **Details** dialog box of the Sync Utility during the updating of the delta page content and configurable fields to create a new revision of the Cognos model.

Ensure that the same version of the SQL Server Native Client is installed on the Changepoint Cognos administrator workstation, and the server that hosts the Cognos content store.

### Error: BME-SP-0032 Your user id or password is incorrect. Re-enter your logon credentials

If you see this message when running the Sync Utility, ensure that the Changepoint database is online by restarting the Cognos service on the Application Tier.

### Error: QE-DEF-0368 Unable to decrypt user name and password credentials from the content store ...

Complete message: QE-DEF-0368 Unable to decrypt user name and password credentials from the content store. Review and save the Cognos Configuration settings to configure your reporting environment.

This error appears on the **Details** dialog box of the Sync Utility during the updating of the delta page content and configurable fields to create a new revision of the Cognos model.

1. Exit the Sync Utility.

2. In the <install location>\ibm\cognos\configuration directory, delete the following folders:
  - csk
  - encryptkeypair
  - signkeypair
3. Launch **IBM Cognos Analytics 10 > IBM Cognos Configuration**, then click **Save**.
4. Launch the Sync Utility.

## Troubleshooting scheduled jobs

### Resource Demand Calculation scheduled job – performance issues or failure

By default, the Resource Demand Calculation scheduled job rolls up projects in batch processing mode.

However, if the job was not scheduled to be run daily, batch mode may not handle the load from accumulated changes. Or if there is an issue with one or more projects, the job might fail. In both cases you can switch the job to single mode processing as a workaround to roll up projects manually until the issues have been addressed.

To switch the Resource Demand Calculation job to single mode processing

1. In SQL Server Management Studio, append “0” to the step that calls the stored procedure RollupProjectsByFiscalPeriods as follows:
 

```
exec RollupProjectsByFiscalPeriods 0
```
2. You can then start and stop the job manually multiple times until all projects have been rolled up.

To revert to batch processing mode, either remove the “0”, or change the “0” to “1”.

## Troubleshooting Intelligent Forms

### How do I troubleshoot issues that I encounter while using forms?

The errors that are generated while using forms are listed in the **Management** tab of Infiniti Manage. If you do not have access to Infiniti Manage, contact your Infiniti administrator to do this for you.

**When I access a submenu item in the Actions menu, a sign-in for Infiniti appears**

To enable single-sign on for Intelligent Forms, the resource's email and password must be entered into their Changepoint user account.

**When I click Intelligent Forms > Infiniti Manage, an "Access denied" error appears**

To access Infiniti Manage from Changepoint Administration, a resource must be assigned the Global administrator role in Infiniti Manage. For more information, see "About security features for Intelligent Forms" on page 1.

## C. Financial Analysis Information

---

### Adding fiscal periods to group financial analysis data

Data in the Financial Analysis Data Providers is grouped by the default set of fiscal periods selected in the Funding and Scenario Comparison Setup in Changepoint Administration.

To add other fiscal periods, insert a row into the database table `FinAnnFiscalPeriod` that contains the `billingofficeid` of the fiscal periods.

**Note:** These changes must be done directly in the database table: there is no UI.

**Note:** It is not necessary to add every billing office or every set of fiscal periods. It is only necessary to add one for each frequency (for example, weekly, monthly or quarterly) that is to be reported on.

### Enabling financial analysis record types

The underlying financial analysis views rely on data that is calculated by the Financial Analysis Summary scheduled job and Calculate Project Costs scheduled jobs for specific record types. `FinAnnRecType` contains all the record types. The "enabled" field indicates which record types are enabled for calculation.

By default, only part of the record types are enabled.

Additional record types can be enabled. Existing record types can be disabled if they are not being used (for example, the types for forecast may be disabled if status updates are not being done and the information is not needed for reporting).

**Note:** These changes must be made directly in the database table: there is no UI.

To enable a record type, mark the row as "enabled" in the `FinAnnRecType` table in the database.

**Warning:** The more record types that are enabled, the longer the processing of the two jobs will take. This applies particularly to record types that group data at the task assignment level. For large databases, reporting at the task assignment level may result in performance issues. Ensure the grouped data providers are used (by month or fiscal period) and that the report is filtered sufficiently.

### **Dependencies among record types**

- Types 0-26, which are enabled by default, should be left as enabled if the scenario comparisons functionality is being used.
- If you use funding sources, leave existing record types enabled. To start using funding sources after the upgrade, enable the appropriate record types:
  - If Projects are associated with funding sources, enable record types 28, 29, 42, 43.
  - If Requests are associated with funding sources, enable types 1, 3, 7, 9, 21, 22, 23.
  - If Opportunities (Candidates) are associated with funding sources, enable types 11, 12, 13, 14.
  - If any type that is related to invoiced items (type 1, 2, 20, 32, 37, 38, 39, 40, 41, 46) is enabled, enable type 0.
  - If type 12 is used, enable type 11.
  - If type 14 is used, enable type 13.



## D. Administrator Information

---

### About creating and configuring an archive database

For more information on archive management and archive jobs, see the *Changepoint Administration Guide*.

Before entities can be archived in Changepoint, you must configure an archive database. The archive database does not have to be on the same server as the source database; however, you must configure the archive database by running the `GenerateEmptyArcDestDB.dtsx` on the server where the source database is located. This `.dtsx` package only needs to be run once.

**Warning:** The `GenerateEmptyArcDestDB.dtsx` file drops the existing archive database (if any) and recreates it. You are responsible for backing up existing databases on the archive server before running the `.dtsx` file.

The minimum recommended size for the archiving processing on the source database is the *greater* of the following amounts:

- 10 GB, with an auto-growth rate of 10%
- three times the amount of data to be archived, with an auto-growth rate of 10%

This space is required for the transaction log of the Archive Aged Entities job.

### Creating a new archive database

1. On the source database server, install or upgrade to the current Changepoint version.
2. Copy the Data Archiving folder and its contents from the Changepoint product media:

```
\Changepoint\Manual Install\Data Archiving
```

to the following location on the source database server:

```
C:\Program Files\Changepoint\Changepoint\Data Archiving
```

**Note:** Because this path is hard-coded in some of the required setup files, it is strongly recommended that use this path. However, if you must use a different path, see "Changing the default location of the data archiving folder" on page 227.

3. Update the following file with the database information for the source production server and the destination archive server:

```
C:\Program Files\Changepoint\Changepoint\Data Archiving\Data Archiving.ini
```

For example:

```
[CPSQLServer]
ConnectionString=server=ServerName;database=Changepoint;uid=USERID;pwd=PASSWORD;
```

```
[ARCSQLServer]
ConnectionString=server=ServerName;database=Changepoint;uid=USERID;pwd=PASSWORD;
```

**Note:** The connection settings for generating a new archive database are not encrypted.

4. Double-click the following file:

```
C:\Program Files\Changepoint\Changepoint\Data
Archiving\GenerateEmptyArcDestDB.dtsx
```

The **Execute Package Utility** dialog opens.

5. Do the following:
  - a. Click the **Connection Managers** page.
  - b. Select the check boxes for the Data Archiving.ini file and the GenerateEmptyArcDestDB.dtsx.log file.
  - c. Change the **Connection String** values for the selected files to the required path.
6. Click **Execute**.

On successful completion, an empty archive database is created.

7. On completion, examine the following log file for any errors:

```
C:\Program
Files\Changepoint\Changepoint\Data Archiving\GenerateEmptyArcDestDB.dtsx.log
```

Common errors are incorrect settings in the Data Archiving.ini file, and insufficient space.

8. From the Changepoint 2017 SP2 media, copy the files from the \Manual Upgrade\Database\ folder to a temp folder.
9. Open the SQLImport.exe.Config file:
  - a. Set the value of the "VersionFrom" key to the same value that is set for the "VersionTo" key.
  - b. Search for and replace the following key:

```
< add key="FMExecOrder" value="--tag=PreMigration,--tag=CPScript,--tag=CPCode,
--tag=PostMigration"/>
```

with

```
< add key="FMExecOrder" value="--tag=CPArchiving,--tag=PostMigration"/>
```

10. Remove the read-only attribute on the copied files, if set.
11. Run the SQL import utility: `SQLImport.exe`. The **Changepoint SQL Update Utility** dialog box appears.
12. Complete the fields as follows:
  - a. **Migration File** field – browse for and select **Changepoint.DatabaseServices.DBMigrations.dll**.
  - b. **SQL Server** field– name of the Changepoint database server.
  - c. **Database** field – name of the Changepoint database.
  - d. **Login ID** field – SQL account used to give the Changepoint applications access to the database.
  - e. **Password** field – password for the SQL account

## Configuring the archive database

If you have a website set up to access the archive database, execute the following commands against the archiving database:

```
exec DBM_SetupCPTempDB
exec DBM_SetupCPExtended
exec DBM_EnableSqlDependency (with the user used in the Web.config files)
```

## Changing the default location of the data archiving folder

It is recommended that you use the default path ( `C:\Program Files\Changepoint\Changepoint\Data Archiving`) as the path for the Data Archiving folder on the source database server. However, if you must use a different path, the following are the changes that need to be made on the source database server to configure the path.

1. In SQL Server Management Studio, connect to the source database server.
2. In the **Object Explorer** tree view, expand:  
**ServerName > SQL Server Agent > Jobs**
3. Right-click the **Archive Aged Entities** job and select **Properties**.

The **Job Properties - Archive Aged Entities** dialog displays.

4. Select the **Steps** page and double-click the **Delete DTSX Log** step.

The **Job Step Properties - Delete DTSX Log** dialog displays.

5. In the **Command** field on the **General** page, replace the argument of the DEL command with the required path and click **OK**.
6. Double-click the **Run Archive DTSX** step.

The **Job Step Properties - Run Archive DTSX** dialog displays.

7. On the **General** page, do the following:
  - a. Click the **General** tab.
  - b. In the **Package** field, select Data Archiving.dtsx.
8. Do the following:
  - a. Click the **Data sources** tab.
  - b. Select the check boxes for the Data Archive.dtsx.log and Data Archive.ini files.
  - c. Change the Connection String values for the selected files to the required path.
  - d. Click **OK**.
9. Click **OK**.

## Setting up websites on the archive database

You can set up new archive websites or upgrade existing archive websites to point to the archive database and run reports from there. Use the InstallShield Wizard and when prompted for details, enter the details for the archive websites instead of the standard Changeoint websites.

After running the InstallShield Wizard, use the Login Settings utility to configure the connection settings to the archive database, using the following configuration files:

- Global.asa for the archive Changeoint website.
- Global.asa for the archive Changeoint Administration website.
- Web.config file for the archive Report Designer website
- WebAPI\web.config file

- WebSocket\web.config file

## Creating a custom form

You can create a custom form by doing the following.

1. In Infiniti Manage:
  - a. Create the form project.
  - b. Configure the form project to use Changepoint data.
  - c. To create a form that creates or updates entities, configure the form project to push and pull Changepoint data.
2. Make the form available to resources in Changepoint. In Changepoint Administration, create the **Actions** menu subheader and submenu item to make the form available to users in Changepoint.

## Configuring a form project to push and pull Changepoint data

To enable a form project to push data to and pull data from Changepoint, you must add three label questions to the form project in Infiniti Manage. The answer to the questions are parameters that are populated at run time and provide the information that is required for authentication and handshaking between Infiniti Launch and Changepoint.

Question	Answer	Save by unique label
Session ID	Session ID	sno
Resource ID	Resource ID	rid
Entity ID	Entity ID	cpguid

1. In Changepoint, click **Intelligent Forms > Manage**.
2. Click the **Projects** tab, and then select the project.
3. Add a question for each of the following IDs. Enter the same ID text for both the question and the answer:
  - Session ID
  - Resource ID

- Entity ID
4. For each of the questions, do the following:
    - a. Expand the question and then select the answer.
    - b. In the **Properties** tab, expand the **Answer File Properties** section.
    - c. Select the **Save to answer file** check box.
    - d. Click the **Save by unique label** option.
    - e. In the text field, enter the text as follows:
      - For Session ID, enter `sno`
      - For Resource ID, enter `rid`
      - For Entity ID, enter `cpguid`

### About creating form projects that create or update entities

You can create an intelligent form that creates an entity record or updates an existing entity record. For example, you can create a form that guides resources through the process of creating or updating a request record.

You create a form project in Infiniti Manage (**Infiniti Manage > Design App**), where there is a default set of Changepoint actions for creating and updating each of the main entities. The actions include the standard fields and configurable fields for the entity. For each field you can specify a fixed value or a reference to an answer value.

You add the actions to the final page in a forms project, and the actions are triggered when the form is submitted. When the forms project is complete, you can configure it to be used in Changepoint.

### Adding an Intelligent Forms form to the Actions menu

To make a forms project available to resources in Changepoint, you must create a submenu header and submenu item for it to appear in the **Actions** menu.

**Note:** The following instructions are specific to creating a submenu header and submenu item for an Intelligent Forms form.

1. In Changepoint Administration, create the submenu header (**User Interface > Actions Menu Integration**).

2. From the submenu header, create the submenu item. In the **Parameter** field, you must enter the ID of the form project, which you obtain from the initial view of the form project in Infiniti Manage.
3. In the **Access control** section, you must restrict access to the form by security feature as follows:
  - If the form creates or updates an entity record, restrict access to the **Access Forms Generation** security feature that is in the **Intelligent Forms** category.
  - If the form creates a document, restrict access to the **Access Document Generation** security feature
4. In **User setup**, assign the security feature to each of the resources who require access to the form.

## Adding logos for invoices/cross charges

Before a logo can be added to invoices for a billing office or cross charges for a cost structure, the image file for the logo must be placed in the `C:\Changepoint\Images\` folder on the Changepoint web server.

Advise users that when they enter the path to the logo in Changepoint Administration, they must exclude the default folder. For example, if the image file is located at:

`C:\Changepoint\Images\invoicelogo.jpg`

Users would enter:

`/Images/invoicelogo.jpg`

## Adding a custom invoice/cross charge format

Before a custom invoice/cross charge format can be set up in Changepoint Administration, the format must be created and then placed under `<cp_root>`.

1. Create the custom invoice/cross charge format in an ASP file.
2. Place the ASP file in the `<cp_root>\core\report` folder or another location under `<cp_root>`.
3. Advise users that when they enter the path to the logo in Changepoint Administration, they must exclude `<cp_root>`.

## Adding a custom ASP report

Before a custom ASP report can be set up in Changepoint Administration, you must add the report file to the Changepoint web server.

As a best practice, add a `Custom` folder to the `Changepoint/Core/Report/` path for storing custom reports.

Advise users that when they specify the report URL in Changepoint Administration, they must leave out the Changepoint domain, but include the file name, for example:

`Core\Report\Custom\MyReport.asp.`

## Changing printers for batch printing

If you add or remove printers on the web server, you will likely need to reconfigure batch printing.

1. Run the `htmlprint.exe` file in the `BatchPrint` directory on the web server.
2. Make the necessary changes to the values of the `PrintServername` keys in the `PrintInvoices.exe.config` files.
3. In Changepoint Administration, make the necessary changes to the following workgroup fields:
  - **Print Server Name** field
  - **Default Printer** field

For more information, see "Configuring batch printing" on page 150.

## About switching between PSA and PPM modes

Changepoint runs in one of two modes: Changepoint PPM (Project Portfolio Management) and Changepoint PSA (Professional Services Automation). The mode is selected during installation, but you can switch modes after installation.

### Database tables modified by the `UpdateSystemDefaults` stored procedure

For reference, the is a list of the database tables that are modified when you run the `UpdateSystemDefaults` stored procedure.

`AccountType`  
`AutoNumberingSetup`  
`CategoryDescription`  
`Chart`



ContactType  
ContractType  
CriteriaType  
Dashboard  
DialogDefault  
Email  
EmailParameters  
ExchangeApplied  
ExpenseCategory  
ExpenseGLACenter  
ExpPubTopic  
FeatureDescription  
GlobalWorkgroup  
HelpDesk  
InvoiceFormats  
IPICategoryType  
IPIMetricCalc  
IPIMetricType  
KMCategory  
LineOfBusiness  
LockType  
OpportunityType  
Report  
ReportCategoryDescription  
ReportDefinitionDescription  
RequestBillingType  
RequestStatus  
RequestType  
ResourceRequestType  
ResourcesRequestInitiateLevel  
RevenueTypeGLA  
Role  
SalesStatus  
Section  
SectionItem  
SurveyTemplateS  
SurveyTriggerType  
TitleDefinitionDescription  
Version  
WorkflowEntity  
WorkflowParticipants  
WriteOffReasons

## Switching between PSA mode and PPM mode

If you installed one mode but later decide to switch to the other mode, you can do this by running a stored procedure and changing the appropriate configuration settings.

1. Open Microsoft SQL Server Management Studio and connect to the Changepoint database using the sa account.
2. Run the UpdateSystemDefaults stored procedure using the ITDFlag value to set the mode:
  - To switch to PSA mode:

```
exec UpdateSystemDefaults @ITDFlag = 0
```
  - To switch to PPM mode:

```
exec UpdateSystemDefaults @ITDFlag = 1
```
3. In the Global.asa file, do the following:
  - For PSA mode, set CompanyProfile to "PSO"
  - For PPM mode, set CompanyProfile to "ITD"
4. In the Web.config files for each application (Changepoint, WebAPI, and Report Designer) do the following:
  - For PSA mode, set CompanyProfile to "PSO"
  - For PPM mode, set CompanyProfile to "ITD"

## Running both PSA mode and PPM mode on the same database

You can run both PSA and PPM websites using the same Changepoint database.

1. Start with a **PSA** mode installation.
2. Run the InstallShield Wizard to create another set of Changepoint websites. When prompted, select the **Websites only** setup type, and select the **ITD** mode.

For more information, see "Installing multiple Changepoint instances" on page 24.

3. Distribute the URLs for the PSA and PPM websites to your users according to the version that they require.

**Note:** Most terms such as field and dialog box names in the Changepoint websites display the correct values according to the specified mode. However, some terms (for example, report names, feature names, and drop-down values in some lists) may not match the ITDFlag setting.

## ASP-based reports that support DSN

The ASP reports that can use a separate report server are:

- All Companies/Clients
- Campaign Profitability
- Competition by Frequency
- Customer Radar
- Employee Vacation Tracking
- Engagement/Initiative Grid By Owner
- Engagement/Initiative Profitability by Month
- Engagement/Initiative Workload
- Expense Reports Approved By Me
- Expense Reports by Resource
- Expense Reports by Status
- Features Assigned to a User
- Invoice/Cross Charge Details with Net Write-offs
- Invoiced/Cross Charged Hours by Resource
- List of All Engagements/Initiatives by Company
- Losses by Competitor
- Management Responsibility By Resource
- My Contacts
- My Expense Reports
- My Knowledge Items
- My Task List
- Non-Invoiced/Non-Cross Charged Time & Expenses
- Opportunities Won/Candidates Approved
- Personal Vacation Time
- Planned Revenue Booked By Company

- Project Completion
- Project Progress
- Project Progress All
- Project Slippage
- Project Summary by Resource
- Projects by Status by Customer
- Projects by Status by Project Manager
- Reference Customers
- Resource by Task
- Resource History
- Resource Workload
- Resources By Approver
- Resources by Function
- Task Status Compliance
- Tasks in Progress or Scheduled to Start
- Tasks Scheduled to Finish in Two Weeks
- Time & Expense by Billing Office/Cost Center
- Time & Expense by Invoice/Cross Charge Number
- Time & Expenses by Employee
- Time Submission Conformance
- Time Summary Report by Resource
- Weekly Time Sheet
- Work Performed for
- Workgroup Record History

## Setting up access to Changepoint portlets and reports in third-party portals

Changepoint portlets and other specifically-enabled pages can be rendered directly in a browser or in third-party portal solutions such as IBM WebSphere, CA CleverPath, and Microsoft SharePoint, using a portlet-specific URL that is based on a common entry point.

To access portlets and reports from outside Changepoint, use the common entry point, and pass additional parameters as required in the querystring:

The URL format is:

```
http://<entrypoint>&portletid=<PortletId>&params=<Params> ...&url=<URL>
```

where:

- entrypoint – <ChangepointURL:port>/core/portlet.aspx?ui=p
  - ChangepointURL:port – the URL and port number of your Changepoint website
- PortletId (required) – Id of the portlet to display (see list below)
- Params (optional) – Additional querystring parameters separated by ";"
- URL (optional) – Custom portlet URL

### Notes

- If the website uses SSL, use the https protocol in place of http.
- If the website uses application authentication, portlet users are prompted for a user name and password for access to the portlet.
- If the website uses integrated Windows authentication, or one of the other Single Sign On (SSO) methods supported by Changepoint, portlets are displayed to authenticated users without requiring further sign on.
- Links from a portlet to other areas of Changepoint are not supported. For example, if you display the **My Reminders** portlet, then click on one of the links within the portlet (for example, "You have time to approve"), the link target might not render or function correctly.
- You are responsible for ensuring that the custom page renders correctly using UI=P.

## Changepoint portlet names and IDs

Portlet name	PortletId
Custom portlet url	*Custom See notes below.
<b>Campaign/ Source</b>	
Source/ Campaign Results	dshCampaign
Upcoming Sources / Campaigns	dshUpcomingCampaign
<b>Client/ Customer &amp; Contact</b>	
Find Person	dshFindPerson
<b>Engagement/ Initiative</b>	
Initiative / Engagement Warnings	dshEngagement
<b>Expense</b>	
Expense	Expense
ExpenseReport	ExpenseReport
<b>Financial Management</b>	
Financial Reminders	dshFinancialReminder
<b>Intelligent Forms</b>	
Intelligent form	iFORM See notes and examples, below.
<b>Invoice/ Cross Charge</b>	
Approved Cross Charges / Invoices	dshApprovedInvoice
Cross Charges / Invoices Pending Approval	dshPendingInvoice
Draft Cross Charges / Invoices	dshDraftInvoice

Portlet name	PortletId
Rejected Cross Charges / Invoices	dshRejectedInvoice
<b>Knowledge Management</b>	
Create Knowledge item	dcSubmitKM
Knowledge Management	dshKM
<b>Opportunity/ Candidate</b>	
Active Candidates / Opportunities	dshActiveOpportunity
Approved Candidates / Opportunities	dshOpportunityWin
Candidate / Opportunity Decision Summary	dshOpportunityOutcome
Candidate / Opportunity Decisions	dshCompetitiveOutcome
Candidate / Opportunity Rollups	dshOpportunityRollup
Initiate Candidate / Opportunity screening	rpOppScreening
<b>Personal portlets</b>	
My Activities	dshActivity
Activity List	uiActFrames
My Favorite Reports	dshFavoriteReport
My Links	dshMyLink
My Performance	dshMyPerformanceChart
My Reminders	dshReminder
My Utilization	dshMyUtilization
Requests Assigned To Me	dshRequestToMe

Portlet name	PortletId
Requests Initiated By Me	dshRequestByMe
<b>Performance Management</b>	
Performance Management	dshPerformanceChart
<b>Project Management</b>	
Project Status by Project Manager Report	rpProjectByStatus_PM
Project planning worksheet (PPW)	PPW See notes and examples, below.
<b>Reporting</b>	
Cognos reports	Cognos See notes and examples, below.
Report Detail	ReportDetail See notes and examples, below.
Report with filter page	ReportDetailContainer See notes and examples, below.
<b>Requests</b>	
Create request	dcrequest See notes below.
Edit Request	dcrequest See notes below.
Requests Summary	dshRequestSummary
Initiate Planning Request screening	rpReqScreening
<b>Resource Management</b>	
Find Person	dshFindPerson



Portlet name	PortletId
Resource scheduling worksheet (RSW)	RSW See notes and examples, below.
Underutilized Resources	dshUnderutilizedResource
Workgroup Utilization	dshWkgpUtilization
<b>Surveys</b>	
Survey Management	dshSurveyManagement
<b>Timesheet</b>	
Timesheet	Timesheet

## Examples

My reminders:

```
http://<ChangeportURL:port>/core/portlet.aspx?ui=p&portletid=dshReminder
```

Create Request:

```
http://<ChangeportURL:port>/core/portlet.aspx?ui=p&portletid=dcrequest
```

## Notes

Custom

To use a custom url:

- PortletId = "\*Custom"
- Url = ~/Custom/Reports/{your custom report here}.asp

Example:

```
http://<ChangeportURL:port>/core/portlet.aspx?ui=p&portletid=*custom&url=~/Custom/Reports/rpCustomRequestReport.asp
```

## Cognos reports

ReportID is required.

- PortletID=Cognos

- Params = reportid=<ReportID>

You can find the *ReportId* using Changepoint Administration (see "Using Changepoint Administration to get Report IDs" on page 244). For reports that are not in portlet format, you can use an SQL query or IE properties.

Example:

```
http://<ChangepointUrl:port>/core/portlet.aspx?ui=p&portletid=Cognos&Params=reportid=<ReportId>
```

### Intelligent Forms

- Portlet ID = iFORM
- Params = id=<Intelligent form ID>

Example:

```
http://mylocalweb/core/portlet.aspx?ui=p&portletid=iFORM&Params=id=<Intelligent Form Id>
```

Or if you need to pass in a Changepoint Entity ID then:

```
http://mylocalweb/core/portlet.aspx?ui=p&portletid=iFORM&Params=id=<Intelligent Form Id>;CPGUID=< EntityId>
```

### Project planning worksheet (PPW)

Project ID is required.

- Portlet ID = PPW
- Params = ProjectId=<Project ID>

Example:

```
http://mylocalweb/core/portlet.aspx?ui=p&portletid=PPW&Params=ProjectId=<Project Id>
```

### Reports (ReportDetail and ReportDetailContainer)

ReportId is required.

- PortletId=ReportDetail

or

- PortletId=ReportDetailContainer

- Params = reportid=<ReportId>

You can find the *ReportId* using Changeport Administration (see "Using Changeport Administration to get Report IDs" on page 244). For reports that are not in portlet format, you can use an SQL query or IE properties.

Example:

```
http://<ChangeportURL:port>/core/portlet.aspx?ui=p&portletid=ReportDetail&Params=reportid=D2AD8CC6-FFE9-4E2A-8980-8AFE8C766059
```

## Resource scheduling worksheet (RSW)

- Portletid=RSW

Example:

```
http://mylocalweb/core/portlet.aspx?ui=p&portletid=RSW
```

## Requests (dcrequest)

Create Request with a tabbed layout (default is inline):

If no template is specified, the default template is used. See "Create a request using a template" on page 243.

- PortletId = dcrequest
- Params = layout=tabbed

Example:

```
http://<ChangeportURL:port>/core/portlet.aspx?ui=p&portletid=dcrequest&Params=layout=tabbed
```

## Create a request using a template

- PortletId = dcrequest
- Params = templateid=<TemplateId>

You can find the TemplateId using a SQL query or IE properties.

Example:

```
http://<ChangeportURL:port>/core/portlet.aspx?ui=p&portletid=dcrequest&Params=templateid=ff7e7079-9e0b-4856-9d7c-f9721437f737
```

## Edit a request

RequestId is required

- PortletId = dcrequest
- Params = action=edit; reqnum=<request number>

Example:

```
http://<ChangepointURL:port>/core/portlet.aspx?ui=p&portletid=dcrequest&Params=action=edit;reqnum=SR-2012-00157
```

## Edit a request using a template

RequestId is required.

- PortletId = dcrequest
- Params = action=edit; reqnum=<request number>;selectedtemplateid=<EditTemplateId>

You can find the EditTemplateId using a SQL query or IE properties.

Example:

```
http://<ChangepointURL:port>/core/portlet.aspx?ui=p&portletid=dcrequest&Params=action=edit;reqnum=SR-2012-00157;selectedtemplateid= ff7e7079-9e0b-4856-9d7c-f9721437f773
```

## Using Changepoint Administration to get Report IDs

To get a report ID:

1. In Changepoint Administration, go to **User Interface > Portlet Management**.
2. In the **Category** list, select **All portlets**.
3. From the list of portlets, select the report.
4. In the **URL** field, copy the reportid=<ReportId> from the end of the URL.

# Index

## A

- Adjust Daylight Savings scheduled job 85
- Ajax errors 210
- APIs, installing 151
- application authentication
  - about 140
  - implementing 141
- Archive Aged Entities scheduled job 85
- archive database
  - configuring 225
  - troubleshooting 217
  - website, setting up 228
- Archive Validation scheduled job 86
- archiving
  - data archiving folder, changing location 227
- Auto Dispatch Request to Queues scheduled job 86
- Auto Escalate Requests scheduled job 86

## B

- batch printing
  - printers, changing 232
- BatchCommit Invoices scheduled job 87
- BatchInvoicingGet InvoiceDefaultList scheduled job 87
- browsers
  - required settings 152

## C

- caching settings, Web.config file 195
- Calculate Project Costs scheduled job 87
- Changepoint-Cognos Sync Utility. See Sync Utility 120
- Changepoint database
  - installing manually 27
- Changepoint Email Notification Service
  - connection settings, configuring 68
  - installing and configuring 51
- Changepoint Exchange Synchronization Service
  - connection settings, configuring 69
  - installing and configuring 52
- Changepoint Export Publishing Service
  - connection settings, configuring 69
- Changepoint Mail Service
  - error messages 57
  - installing and configuring 57
- Changepoint Mail Windows Service
  - connection settings, configuring 70
- Changepoint Public Utility
  - object interfaces 187
- Changepoint Report Prerender Service
  - connection settings, configuring 70
  - installing and configuring 59
- Changepoint Report Scheduler Service
  - connection settings, configuring 71
  - installing and configuring 61
  - starting and stopping 62
- Changepoint website
  - multiple instances, installing 24

Changepoint Windows Services

- installing 51
- troubleshooting 212
- uninstalling 51

CheckTimeTo Approve scheduled job 88

CleanResource Availability scheduled job 88

Client Portal

- setting up 147
- using in training 193

Cognos

- install multiple instances 125

Cognos BI

- data model version, reverting 124
- data model, adding custom fields 123
- installing 107
- roles and features mapping with Change-  
point 108
- uninstalling 174
- upgrading 171

Cognos BI installation

- parameters 109

COM API 151

configuration files

- default user ID and password 65
- Global.asa file settings 202
- Web.config file 195

connection settings, configuring 66

connection string decryption utility

- code examples 187
- installing 152
- report example 188
- uninstalling 152

CPEffectivedates scheduled job 89

CPFullText scheduled job 89

CPFullText using background updates sched-  
uled job 90

CPTempDB\_Clean up idle-orphaned schemas  
scheduled job 90

cross charges

- formats, adding 231
- logos, adding 231

## D

daily demand distributions

- retaining in past fiscal periods 106

data model, Cognos

- adding fields to 123
- importing 123
- reverting 124

database

- growth, monitoring 103
- inventory report 156
- performance optimization guidelines 184
- troubleshooting 216

database connection settings

- about 65
- batch print 66, 76
- Changepoint 66
- Changepoint Email Notification Service 68
- Changepoint Exchange Synchronization Ser-  
vice 69
- Changepoint Export Publishing Service 69
- Changepoint Mail Windows Service 70
- Changepoint Report Prerender Service 70
- Changepoint Report Scheduler Service 71
- configuring 65
- CPEffectiveDates scheduled job 80
- Release Guest Licenses scheduled job 80
- Report Designer 78
- Transport Tool 81

**databases**

- archive, porting 181
- archive, upgrading 170
- Changepoint, porting 179
- upgrading manually 160

**decrypting connection strings**

- code examples 187
- report example 188

**E****eLearning**

- installing 146

Email Notification Service. See Change-point Email Notification Service 51

Enable All TRs NFKs script 217

**error messages**

- Ajax 210
- Changepoint Mail Service 57
- JavaScript in Internet Explorer 210

**Exchange Server**

- troubleshooting 213

Exchange Synchronization Service. See Changepoint Exchange Synchronization Service 52

**export publishing**

- Web.config file settings 196

**F****fields**

- maximum results, setting 196

**files**

- types for upload, setting 197

Financial Analysis Summary scheduled job 90

**G**

Global.asa file 202

- caching setting 202
- default page size setting 203
- file types for upload, setting 197
- global ADO command time-out, setting 204
- PCIDs, display setting 203
- report settings 204
- terminology mode setting 204

**H**

hardware requirements 14

htmlprint utility, installing 150

**HTTP compression**

- optimizing performance 49
- technical notes 49

**HTTP runtime settings**

- Web.config file 197

**I****IIS**

- expense template downloads, enabling 50
- Global parameters 49
- plug-in downloads, enabling 50

**invoices**

- formats, adding 231
- logos, adding 231

IPM Calculation Engine scheduled job 91

**J****JavaScript errors**

- Internet Explorer 210

## **L**

Login Settings utility 65

## **M**

Mail Service. See Changepoint Mail Service 57

manual upgrade

Changepoint database 160

Microsoft Exchange Autodiscover Service  
configuring 57

Microsoft Project  
integration 149

mobile access

fields, setting maximum results 198

modes

running both ITD and PSA 234

## **O**

online help

installing 145

## **P**

paging

default number of records, Global.asa 203

default number of records, Web.config 199

PCIDs

Global.asa display setting 203

Web.config display setting 199

PercentOfContract Incurred scheduled job 92

Performance CPGrowth scheduled job 93

performance optimization

Changepoint website guidelines 183

database guidelines 184

HTTP compression 49

memory, SQL server 184

RAID configuration 184

permissions, checking 48

portals

third-party, Changepoint support 237

Portfolio Calculate Report Cards scheduled  
job 93

Portfolio Calculation Engine scheduled job 94

porting

archive database 181

Changepoint databases 179

Process Expense Approval scheduled job 95

Process Time Entries for Approval scheduled  
job 96

## **R**

Reindex and Update Statistics daily scheduled  
job 96

Reindex and Update Statistics weekly sched-  
uled job 96

Release Guest Licenses scheduled job 97

Release Held Locks scheduled job 97

Report Designer

connection settings, configuring 78

Report Prerender Service. See Changepoint  
Report Prerender Service 59

Report Scheduler Service Controller  
using 62

Report Scheduler Service. See Changepoint  
Report Scheduler Service 61



- reports
  - ASP based that support DSN 234
  - custom ASP, adding 232
- Request Filter Module
  - expense template downloads, enabling 50
  - plug-in downloads, enabling 50
- requirements
  - Changepoint installation 13
- Resource Demand Calculation scheduled job 98
- Resource Demand Calculation scheduled job, switch to single mode processing 221
- Resource Utilization scheduled job 98
- Revenue Recognition Tentative scheduled job 99

## S

- scenario comparisons
  - Web.config settings 200
- scheduled jobs
  - about 83
  - editing parameters 102
  - reference list 85
  - scheduling chain 83
  - Update Time Rate job, running 84
- scripts
  - Enable All TRs NFKs 217
  - SQL Environment Report 215
- Session Clean Up scheduled job 99
- SQL Environment Report script 215
- SQL server
  - performance guidelines 184
  - requirements 17

- troubleshooting 215

- SSL
  - configuring for Changepoint 48

- SSO
  - about 139
  - authentication scenarios 142

- stored procedures
  - UpdateSystemDefaults 232

- survey response website
  - setting up 148

- Survey Set Expired Survey scheduled job 100

- Sync Utility
  - base data model, importing 123
  - configuring for Changepoint PPM 123
  - installing 122
  - overview 120
  - uninstalling 123
  - upgrading 121

## T

- Task slippage scheduled job 100

- terminology
  - mode setting, Global.asa 204
  - mode setting, Web.config 201

- test and training environments
  - setting up 191

- third-party portals
  - Changepoint support 237

- time-outs
  - decrypted connection strings 187
  - global ADO commands, setting global 204
  - settings in Web.config file 201

- Time Conformance scheduled job 101

Transport Tool

connection settings, configuring 81

troubleshooting

archive database 217

Changepoint 207-208

Changepoint Windows Services 212

Cognos BI installation 218

database 216

excessive table growth 217

Exchange Server 213

Resource Demand Calculation scheduled  
job 221

SQL server 215

Sync Utility 220

workgroups 211

**U**

uninstalling

Changepoint 26

Changepoint Windows services 51

Cognos BI 174

connection string decryption utility 152

Sync Utility 123

Update Time Rate job, running 84

Update Time Rate scheduled job 101

UpdateSystemDefaults stored procedure 232

upgrading

archive databases 170

database, manually 160

post-upgrade instructions 160

preparation 157

using installer 159

**V**

Validate UDFs scheduled job 101

versions

running both ITD and PSA 234

**W**

Web Services

API 151

Web.config file

about 195

default page size 199

export publishing settings 196

http runtime settings 197

max results for mobile access, setting 198

maximum field results, setting 196

PCIDs, displaying on UI 199

scenario comparisons settings 200

terminology, setting 201

time-out settings 201

tree view settings 201

Windows Server

Global IIS parameters 49

Workflow Management scheduled job 102

workgroups

troubleshooting 211